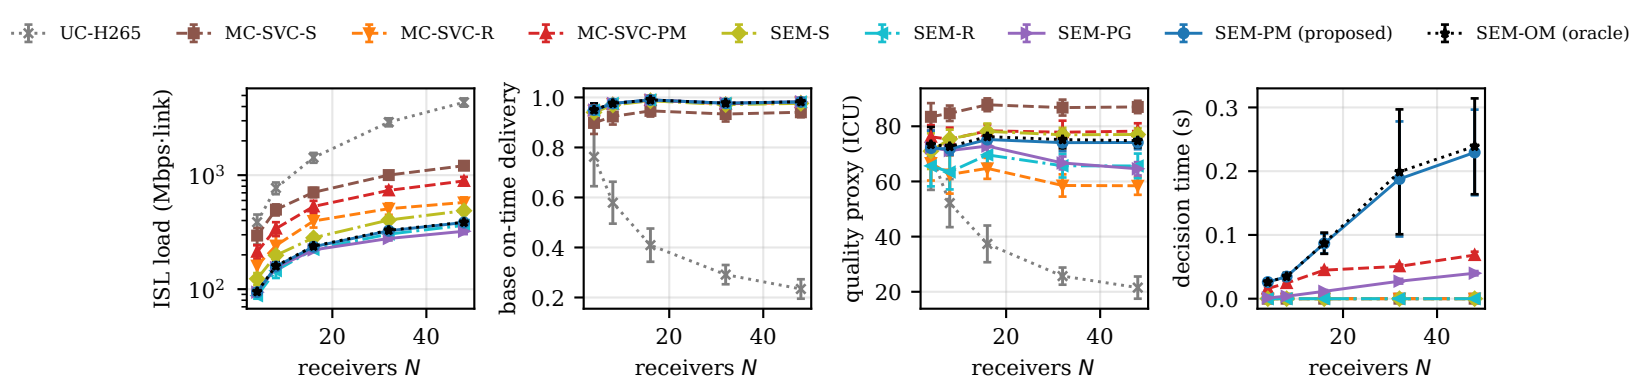
UC-H265
MC-SVC-S
MC-SVC-R
MC-SVC-PM
SEM-S
SEM-R
SEM-PG
SEM-PM (proposed)
SEM-OM (oracle)
ISL load (Mbps·link)
10^3
10^2
base on-time delivery
1.0
0.8
0.6
0.4
0.2
quality proxy (ICU)
80
60
40
20
decision time (s)
0.3
0.2
0.1
0.0
20
40
receivers N