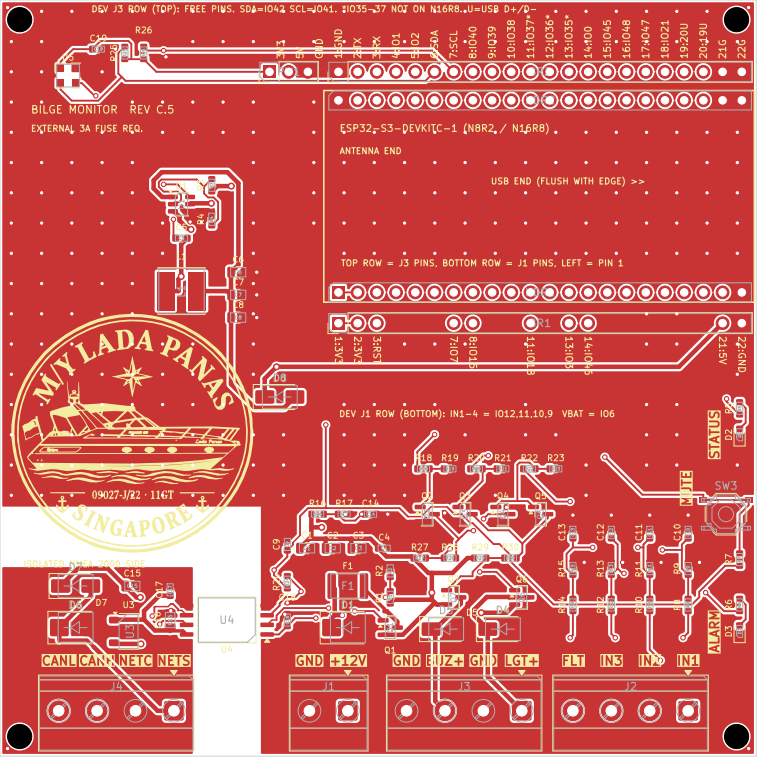

DEV J3 ROW (TOP): FREE PINS. SDA=IO42 SCL=IO41. IO35–37 NO/ ON N16R8. U=USB D+/D−
BILGE MONITOR REV C.5
EXTERNAL 3A FUSE REQ.
ESP32-S3-DEVKITC-1 (N8R2 / N16R8)
ANTENNA END
USB END (FLUSH WITH EDGE) >>
TOP ROW = J3 PINS, BOTTOM ROW = J1 PINS, LEFT = PIN 1
DEV J1 ROW (BOTTOM): IN1–4 = IO12,11,10,9 VBAT = IO6
MY LADA PANAS
09027-J/22 · 11GT
SINGAPORE
STATUS
MUTE
ALARM
SW3
CANL
CANH
NETC
NETS
GND
+12V
GND
BUZ+
GND
LGT+
FLT
IN3
IN2
IN1
J1
J2
J3
J4
U4