

The information contained in this document is the proprietary and confidential information of ENPHASE ENERGY, Inc.. You will not provide, make available or disclose (or use for any purpose other than that contemplated by this document) any such information to any other party without the express, written consent of ENPHASE ENERGY, Inc.

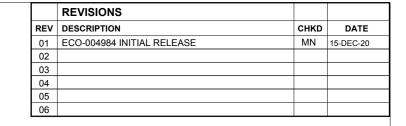

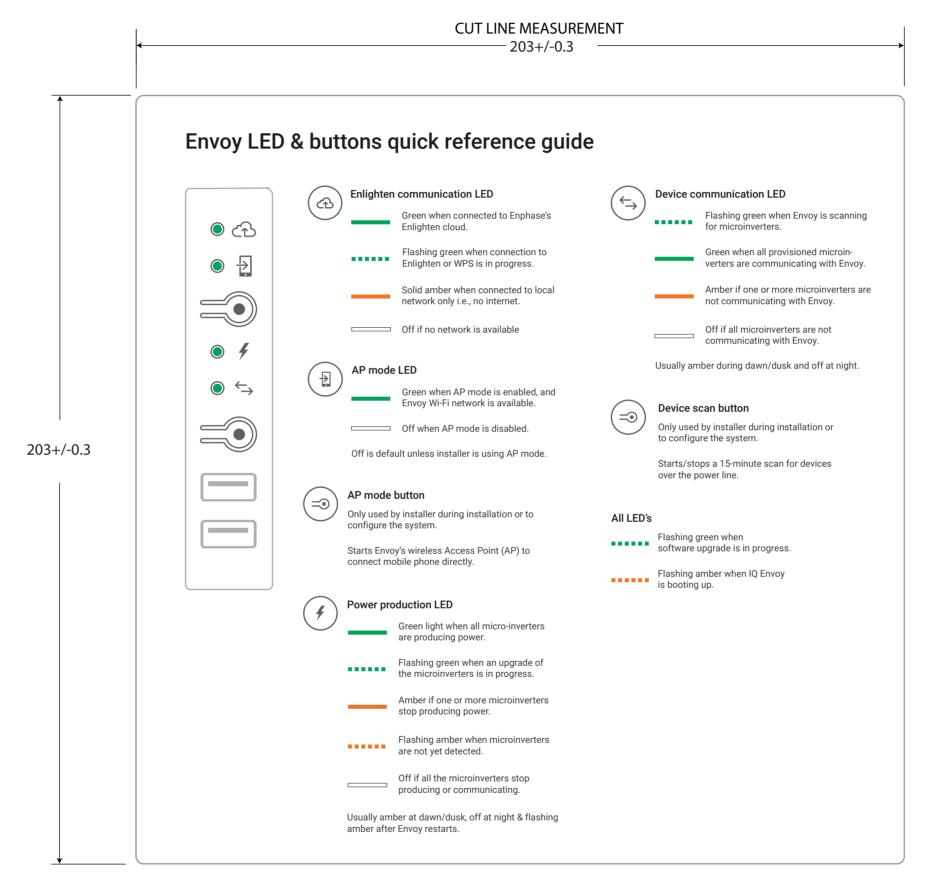

CUT LINE - DO NOT PRINT

NOTES:

- 1. MATERIAL: 3M 7871 POLYESTER BASE MATERIAL, 3M ADHESIVE - 350 HIGH BONDING ACRYLIC ADHESIVE WITH CLEAR OVERLAY ON FRONT.
- 2. COLOR: BACKGROUND WHITE, BLACK C, RED C, GREEN C.
- 3. USE UV RESISTANT INK
- 4. COMPLETED LABELS TO BE PACKAGED WITH PART NUMBER AND REVISION, MFG CODE AND DATE.
- 5. SUBMIT ALL ARTWORK PROOFS FOR APPROVAL PRIOR TO PRINTING.
- 6. LABEL MUST BE UL RECOGNIZED (PGDQ2) AND CSA ACCEPTED AS SUITABLE FOR OUTDOOR USE AT TEMPERATURES FROM -40°C TO +65°C AND SUITABLE FOR THE SURFACE TO BE APPLIED (PER UL RECOGNIZED COMPONENT DIRECTORY). EACH LABEL MUST BE MARKED WITH VENDOR'S MARK AS DEFINED IN THE CSA LIST OF ACCEPTED ADHESIVE-TYPE NAMEPLATES. THE SMALLEST SHIPPING PACKAGE MUST BE MARKED WITH SUPPLIER'S NAME AND UL DESIGNATION.
- 7. FINISHED PART MUST BE ROHS COMPLIANT (EU ROHS DIRECTIVE 2015/863/EU). MANUFACTURER WILL BE REQUIRED TO CERTIFY ROHS COMPLIANCE. IF THERE IS A CONFLICT BETWEEN THE SPECIFICATIONS AND ROHS COMPLIANCE, THE VENDOR MUST CONTACT ENPHASE FOR CLARIFICATION.
- 8. ALL DIMENSIONS ARE IN MILLIMETERS.

APPROVALS	DATE				
M. Nagy 14-DEC-2020		ENPHASE.			
FULL NAME	DD-MONTH-YY				
FULL NAME	DD-MONTH-YY	TITLE	Label, Envoy, LED & Buttons		
⊕ €		Quick Reference			
THIRD ANGLE PROJECTION		C (A2)	780-00632		01
DO NOT SCALE THIS DRAWING		3D MODEL		SHEET 1 O	F 1