


DC34 Badge SAO Electrical Spec

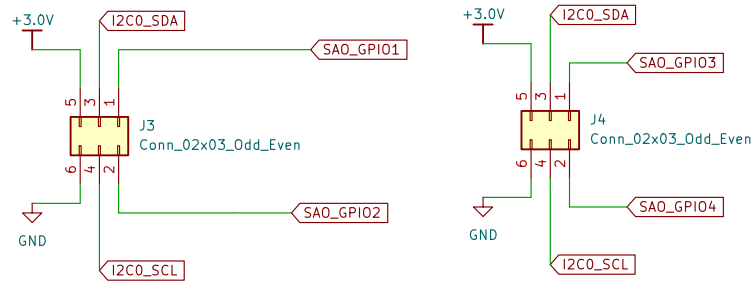

Notes:

- VDD is at 3.0V (not 3.3V)
- Supply tested to 100mA total across both SAOs (supply can do "more", but no promises)
- The badge is powered off of 2xAA batteries
- There is a USB type C port. When powered off a power bank, the badge stays continuously on
- GPIO4 is an open-drain wake-up interrupt to the CPU
- Other GPIOs have some combination of pull-up or pull-down resistors on them ranging from 2.2k to ~47k
- I2C has devices on 0x3C and 0x19

DC34 Badge SAO Mechanical Spec

