



a Genesee & Wyoming Company

Georgia Central Railway, L.P.

TIMETABLE #3

Effective 0001 on
September 15, 2016



Our Goal Every Day

Georgia Central Railway

Table of Contents

Telephone Numbers.....	2
System Special Instructions.....	15

Timetable Characters	
A	Automatic Interlocking
B	Radio Base Station
C	Commuter Passenger Station
CP	Control Point
CS	Controlled Siding
EMT	End of Main Track
G	General Order/ Bulletin location
J	Railroad Junction
M	Manual Interlocking
W	Wye
X	Main Track Crossover
Y	Yard

Timetable Characters.....	3
---------------------------	---

Georgia Central Railway

Georgia Central Railway, L.P.

186 Winge Road
Lyons, GA 30436

Name	Job Title	Phone	Fax	Cell
ARDC	Train Dispatcher	(802) 527-3573	---	---
Jacksonville	Customer Service	(800) 757-7387	(904) 999-5316	---
Vincent Cardinal	General Manager	(912) 526-6165 ext 210	(912) 526-6399	(912) 253-7970
Samuel Scott	Roadmaster	(912) 526-6165 ext 207	(912) 526-6399	(912) 293-1266

Crew Contact

<u>Railroad (I/C)</u>	<u>Title</u>	<u>Phone</u>
CSX	Yardmaster	(912) 944-1466
CSX	Train Dispatcher	(800) 224-2598
NS	Yardmaster	(800) 552-6520
NS	Signal Dispatcher	(800) 552-6520

Emergency Responders

Emergencies 911

<u>Agency</u>	<u>Phone</u>
Chatham County Sheriff	(912) 652-6501
Savannah City Police	(912) 652-6500
Garden City Police	(912) 966-7778
Bloomington City Police	(912) 748-8302
Bryan County Sheriff	(912) 653-2899
Pembroke City Police	(912) 653-4414
Effingham County Sheriff	(912) 754-3449
Evans County Sheriff	(912) 739-1611
Claxton City Police	(912) 739-2121
Tattnall County Sheriff	(912) 557-6778
Toombs County Sheriff	(912) 526-9292
Lyons City Police	(912) 526-3638
Vidalia City Police	(912) 537-4123
Montgomery County Sheriff	(912) 583-2521
Treutlen County Sheriff	(912) 529-3222
Soperton City Police	(912) 529-4221
Laurens County Sheriff	(478) 272-7985
East Dublin City Police	(478) 272-6883
Dublin City Police	(478) 272-7985
City Of Dudley (City Hall)	(478) 676-3495
Twiggs County Sheriff	(478) 945-3357
Jeffersonville City Police	(478) 945-6972
Bibb County Sheriff	(478) 746-9441
Macon City Police	(478) 751-7500

Georgia Central Railway

Siding Feet	Mile Post	Macon Subdivision	
		Stations	Timetable Characters
	0.0	Macon	Y
5590	49.5	West Dublin	
	92.3	Vidalia	Y
Macon Sub Ends At MP 92.3 (Vidalia)			

METHOD OF OPERATION

MP 0.0 – MP 2.0	Yard Limits
MP 2.0 – MP 49.0	TWC
MP 49.0 – MP 58.6	Yard Limits
MP 58.6 – MP 92.3	TWC

MAXIMUM SPEEDS

	MPH
MP 0.0 – MP 58.6 (Dublin Yard).....	10
MP 58.6 – MP 75.9.....	25
MP 75.9 – MP 77.0.....	10
MP 77.0 – MP 81.5.....	25
MP 81.5 – MP 81.6 (Old Scales).....	10
MP 81.6 – MP 91.3.....	25
MP 91.3 – MP 92.3 (Vidalia).....	10

RADIO PROCEDURES

Location	AAR99 Channel	Channel Number
GC	04, 04	2
NS	014 , 014	18

EQUIPMENT RESTRICTIONS

Maximum Railcar Weight	286,000 lbs
------------------------	-------------

MAIN TRACK SWITCH LOCATIONS

MP 4.7	W Smithsonia	MP 37.6	E Montrose
MP 5.2	E Smithsonia	MP 40.9	W Gilman
MP 5.4	Plastican Lead	MP 41.2	E Gilman
MP 5.9	Saddle Creek Lead	MP 42.0	Dudley House Track
MP 7.2	Tom's Candy	MP 49.5	WSS West Dublin
MP 8.9	W Dry Branch	MP 50.8	ESS West Dublin
MP 9.2	Dry Branch Lead	MP 75.1	W End Runaround
MP 15.6	W Fitzpatrick	MP 75.2	E End Runaround
MP 16.0	E Fitzpatrick	MP 79.3	E Coast Asphalt
MP 23.0	W Jeffersonville	MP 81.6	W Tarrytown
MP 23.2	E Jeffersonville	MP 82.0	E Tarrytown
MP 37.4	W Montrose	MP 91.9	Wye Track

DEFECT DETECTORS

None

FRA EXCEPTED

East Seaboard Jct - West Seaboard Jct within Dublin Yard limits

REMOTE CONTROL OPERATIONS

None

OTHER SPECIFIC INSTRUCTIONS

1. Norfolk Southern may operate trains and have MOW personnel working between East Seaboard Junction and West Seaboard Junction switches at any time within Dublin Yard Limits.
2. Westrock Lead Switch may be left lined for other than main track movement (reversed position).
3. Dry Branch Lead (MP9.2) – Out Of Service. Private Locks Installed.
4. Westrock Industry – Use caution walking on clay track and warehouse track due to ground conditions.

Notes:

[illegible]

Georgia Central Railway

Savannah Subdivision				
Siding Feet	Mile Post	Stations	WEST	Timetable Characters
	499.0	Savannah Y		
2820	513.9	Meldrim		
4224	535.0	Groveland		
4750	556.6	Collins		
	568.0	Lyons		
	575.6	Vidalia Y		
Savannah Sub Ends At MP 577.8 (Vidalia)				

METHOD OF OPERATION	
MP 499.0 – MP 503.0	Yard Limits
MP 503.0 – MP555.0	TWC
MP 555.0 – MP 558.0	Yard Limits
MP 558.0 – MP 568.0	TWC
MP 568.0 – MP 571.0	Yard Limits
MP 571.0 – MP575.6	TWC
MP 575.6 – MP 577.8	Yard Limits

MAXIMUM SPEEDS		
MP 499.0 –	MP 504.0.....	10 MPH
MP 504.0 –	MP 544.8.....	25 MPH
MP 544.8 –	MP 546.5.....	10 MPH
MP 546.5 –	MP 555.0.....	25 MPH
MP 555.0 –	MP 558.0 (Collins Yard).....	10 MPH
MP 558.0 –	MP 568.0.....	25 MPH
MP 568.0 –	MP 571.0 (Lyons Yard)....	10 MPH
MP 571.0 –	MP 573.6.....	25 MPH
MP 573.6 –	MP 577.8	10 MPH

RADIO PROCEDURES		
Location	AAR99 Channel	Channel Number
GC	04, 04	2
CSXT	066, 066	
	032, 032	6

EQUIPMENT RESTRICTIONS	
Maximum Railcar Weight	263,000 lbs

MAIN TRACK SWITCH LOCATIONS			
MP 504.1	Mitsubishi	MP 535.0	ESS Groveland
MP 504.9	ProBuilders	MP 535.9	WSS Groveland
MP 512.9	Faulkville Lead	MP 544.7	Claxton Poultry
MP 513.9	ESS Meldrim	MP 547.3	E Hagan
MP 514.1	Interfor	MP 547.8	W Hagan
MP 514.5	WSS Meldrim	MP 548.5	E Bellville
MP 517.3	Aggregates USA E	MP 548.9	W Bellville
MP 518.1	Aggregates USA W	MP 556.6	ESS Collins
MP 524.3	E Global	MP 557.5	WSS Collins
MP 524.6	W Global	MP 571.4	Lyons Stub Track

DEFECT DETECTORS	
None	

FRA EXCEPTED
Savannah Yard: (All tracks between north and south leg of Wye Track and Magazine Avenue)

REMOTE CONTROL OPERATIONS	
None	


OTHER SPECIFIC INSTRUCTIONS

1. All Savannah trains and engines must have in their possession a copy of all current CSX Bulletins. Eastward train and engine movements will be governed by signal indication beginning at Telfair Road and verbal permission to proceed from the CSX Yardmaster at Southover Yard.
2. All Georgia Central Railway train and engine movements must obtain permission from the CSX yardmaster at Southover Yard before occupying CSX tracks in Savannah.


Notes:

[illegible]


Georgia Central Railway

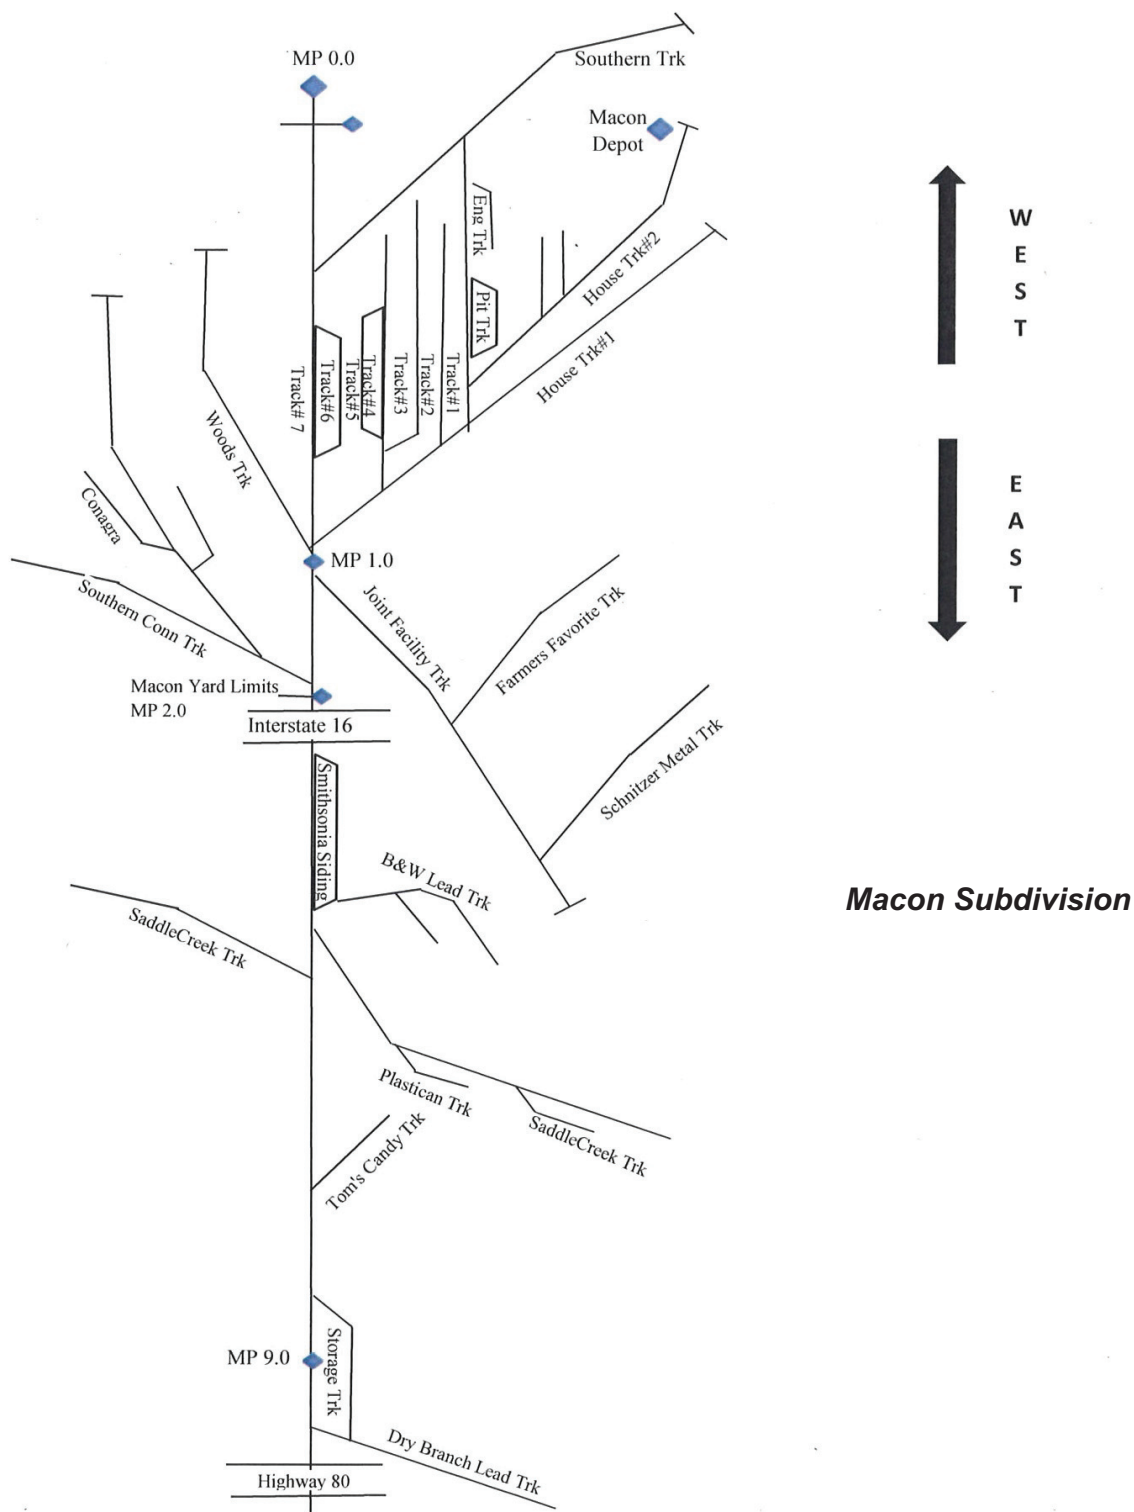


Georgia Central Railway

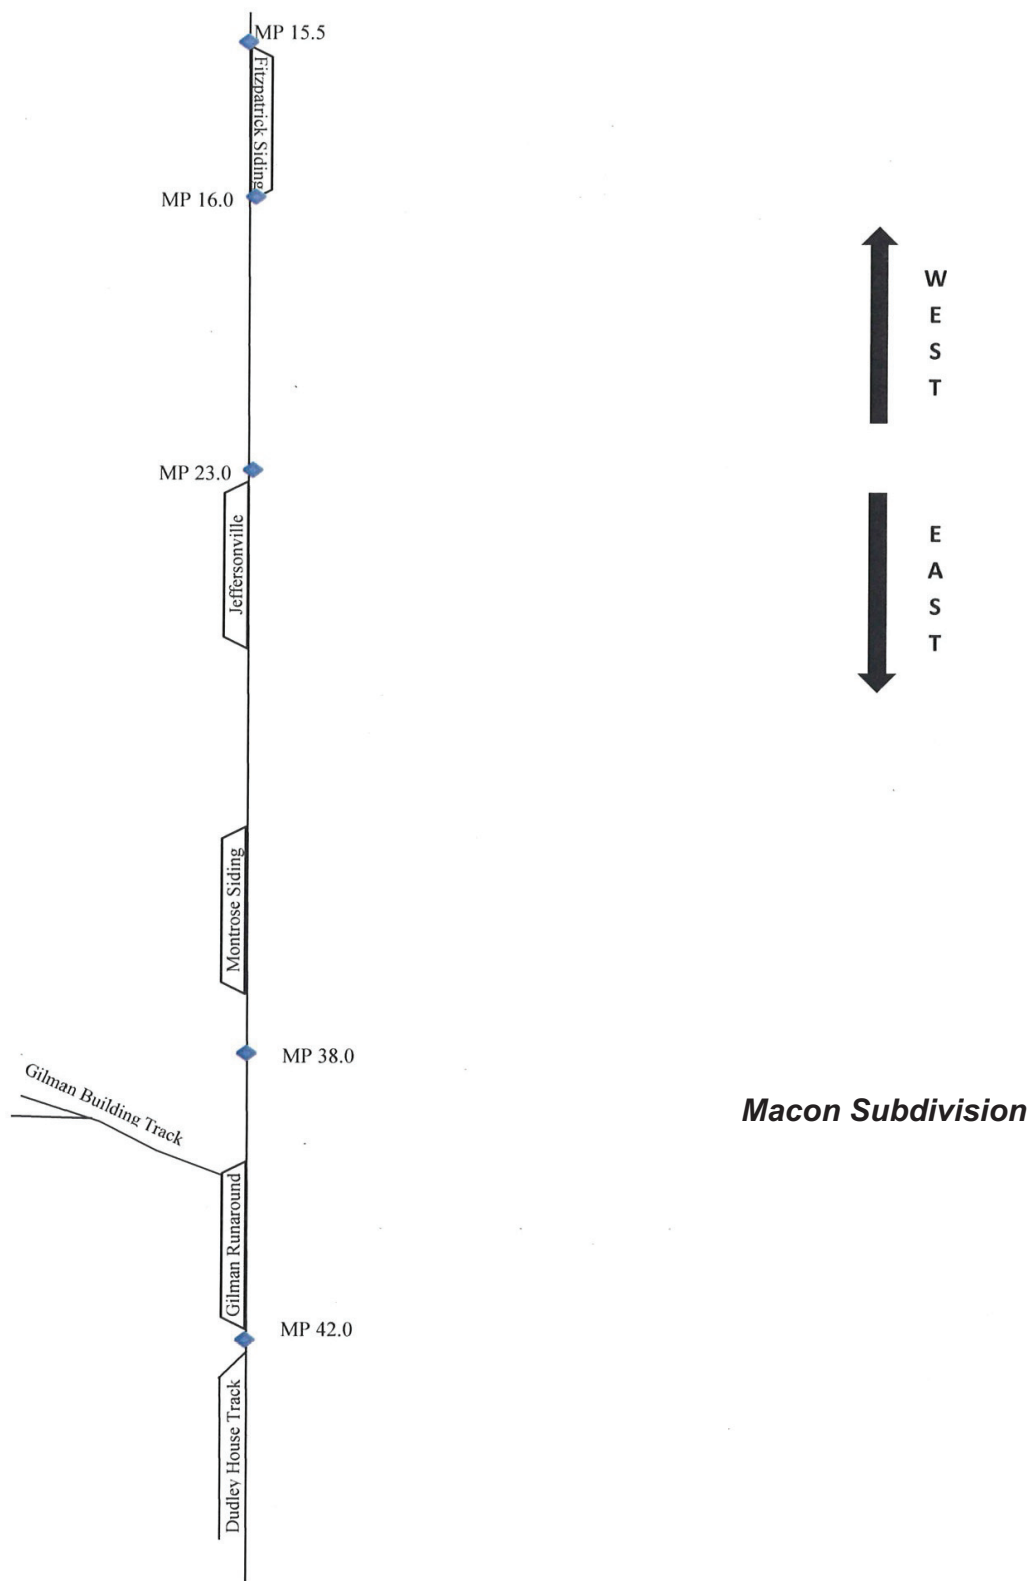


Georgia Central Railway

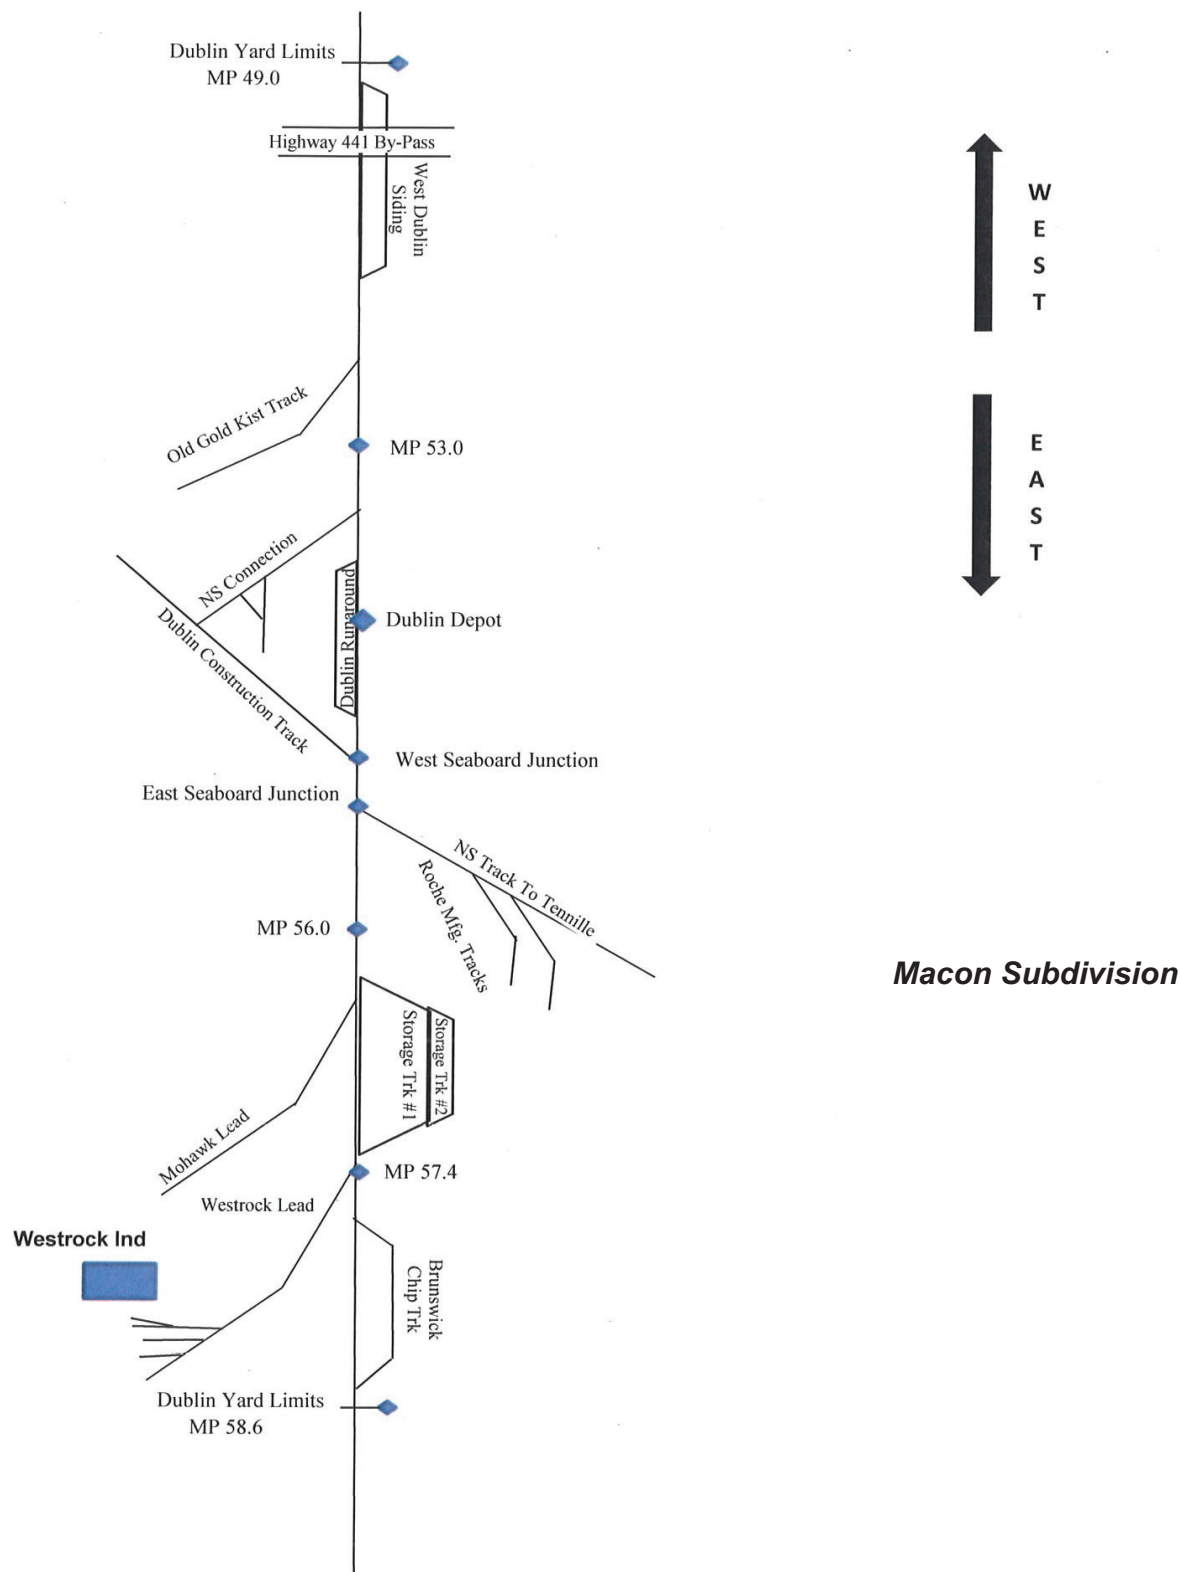


Georgia Central Railway

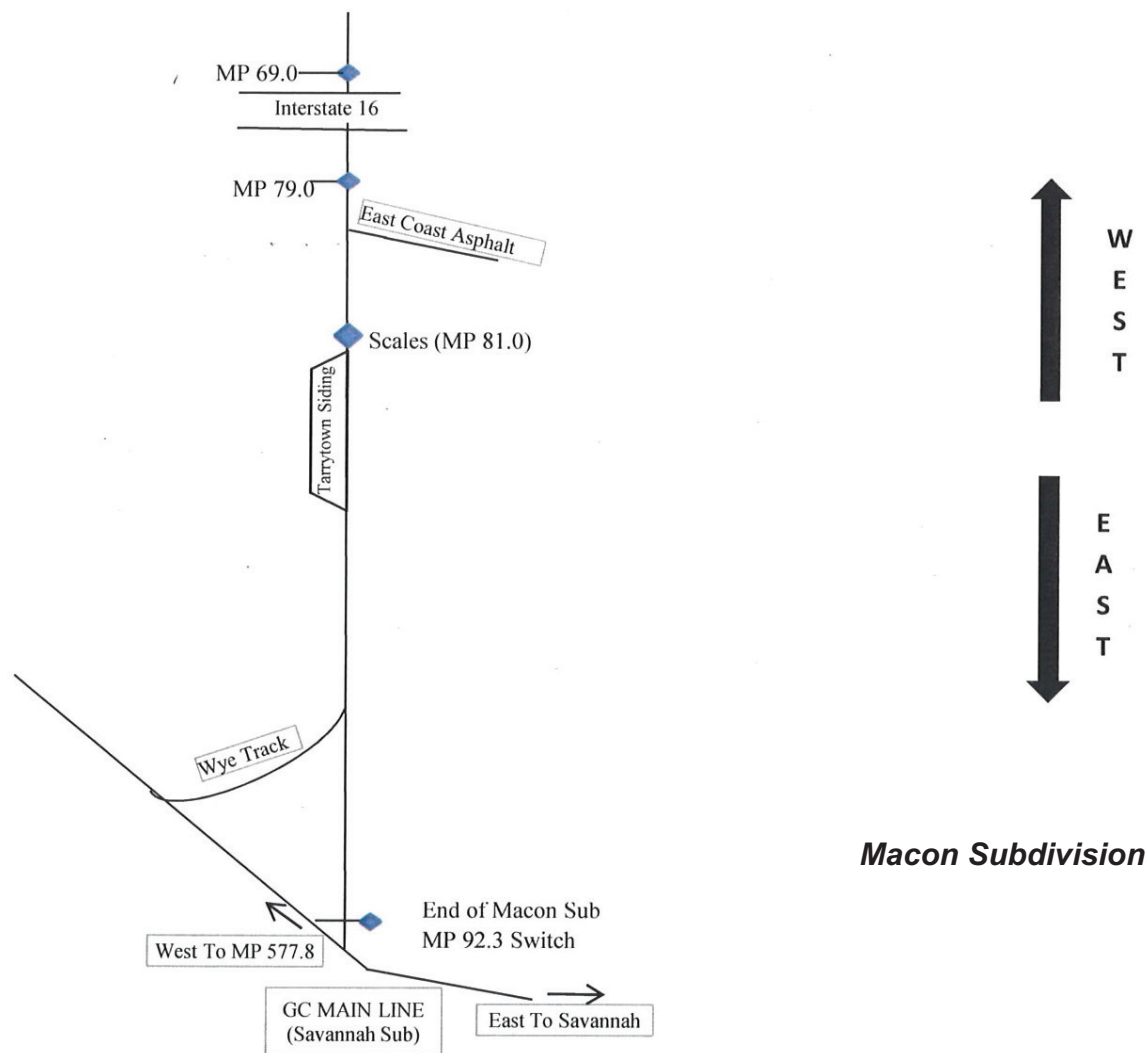

Georgia Central Railway

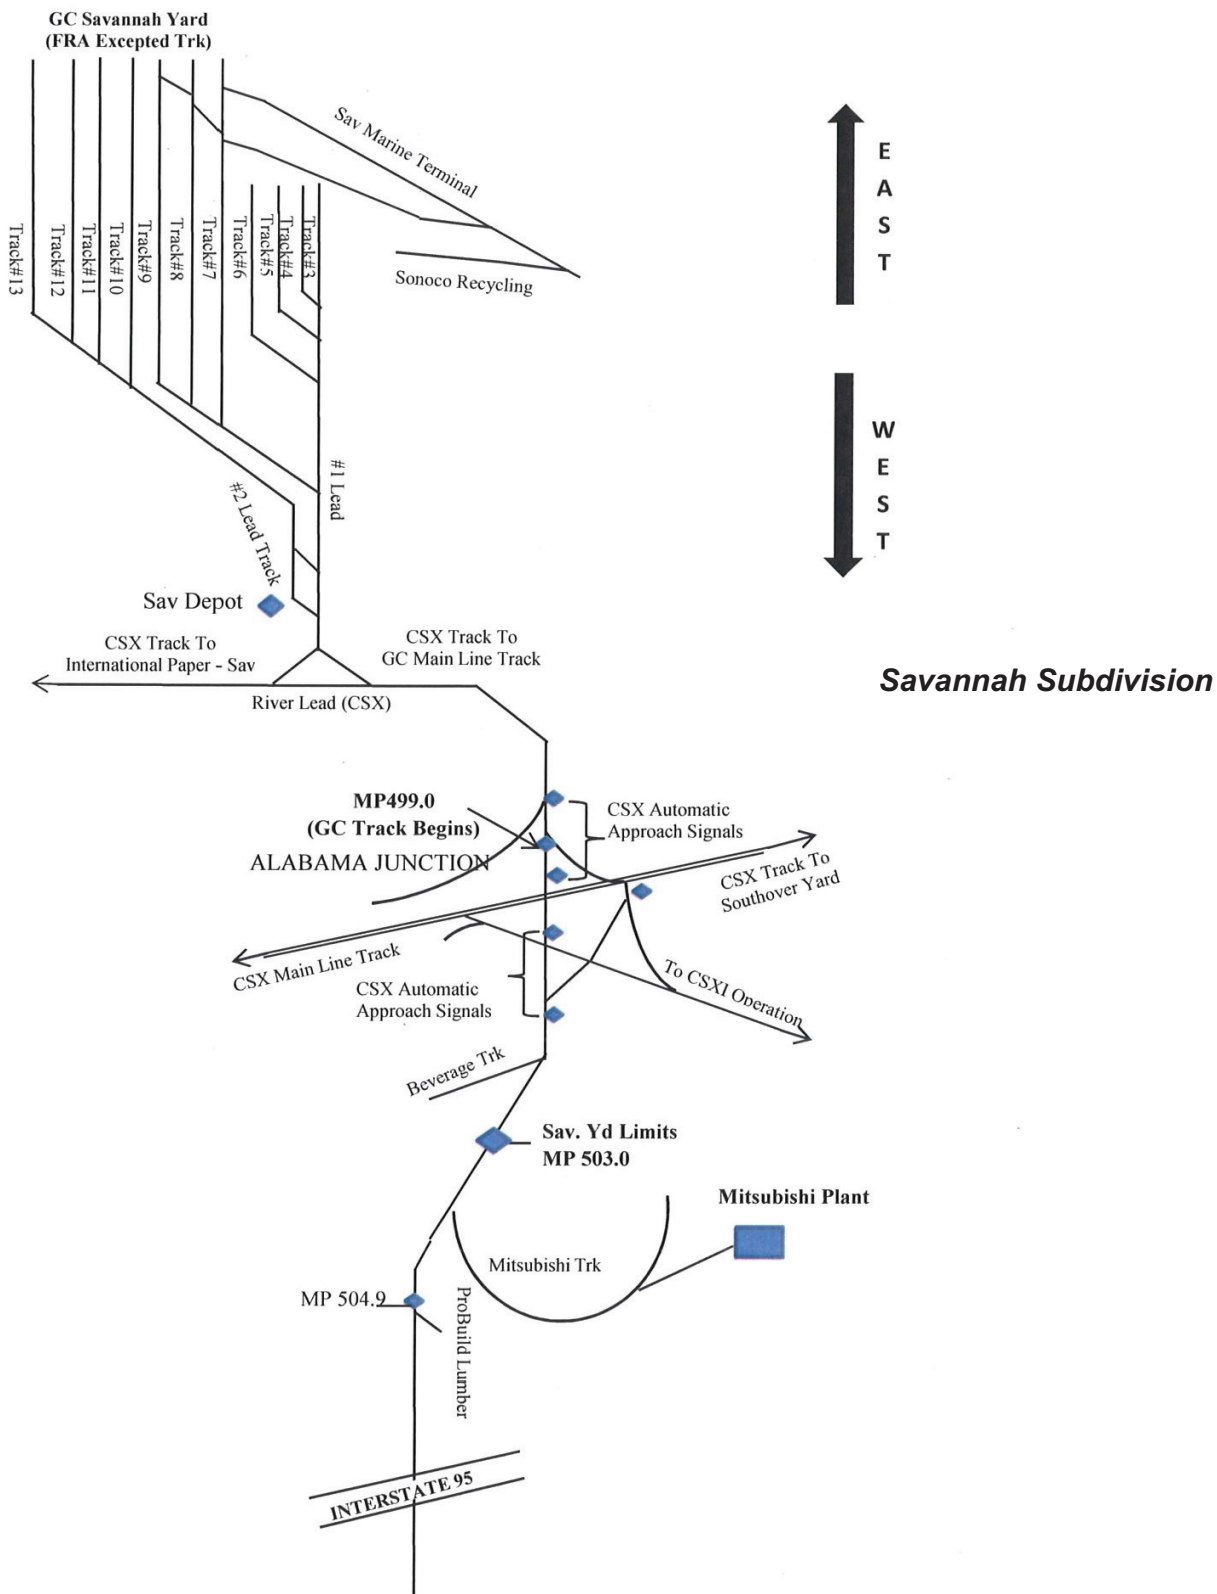


Georgia Central Railway

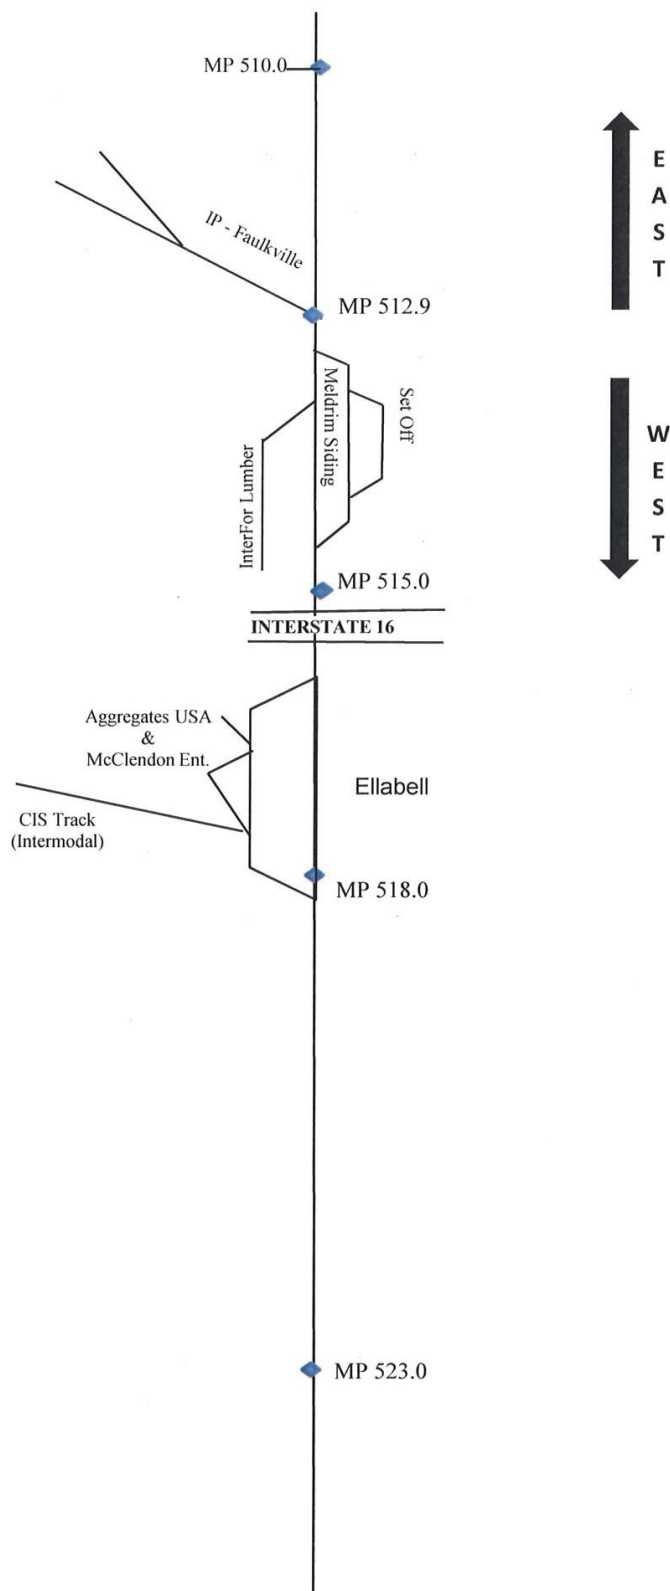


Savannah Subdivision


Georgia Central Railway

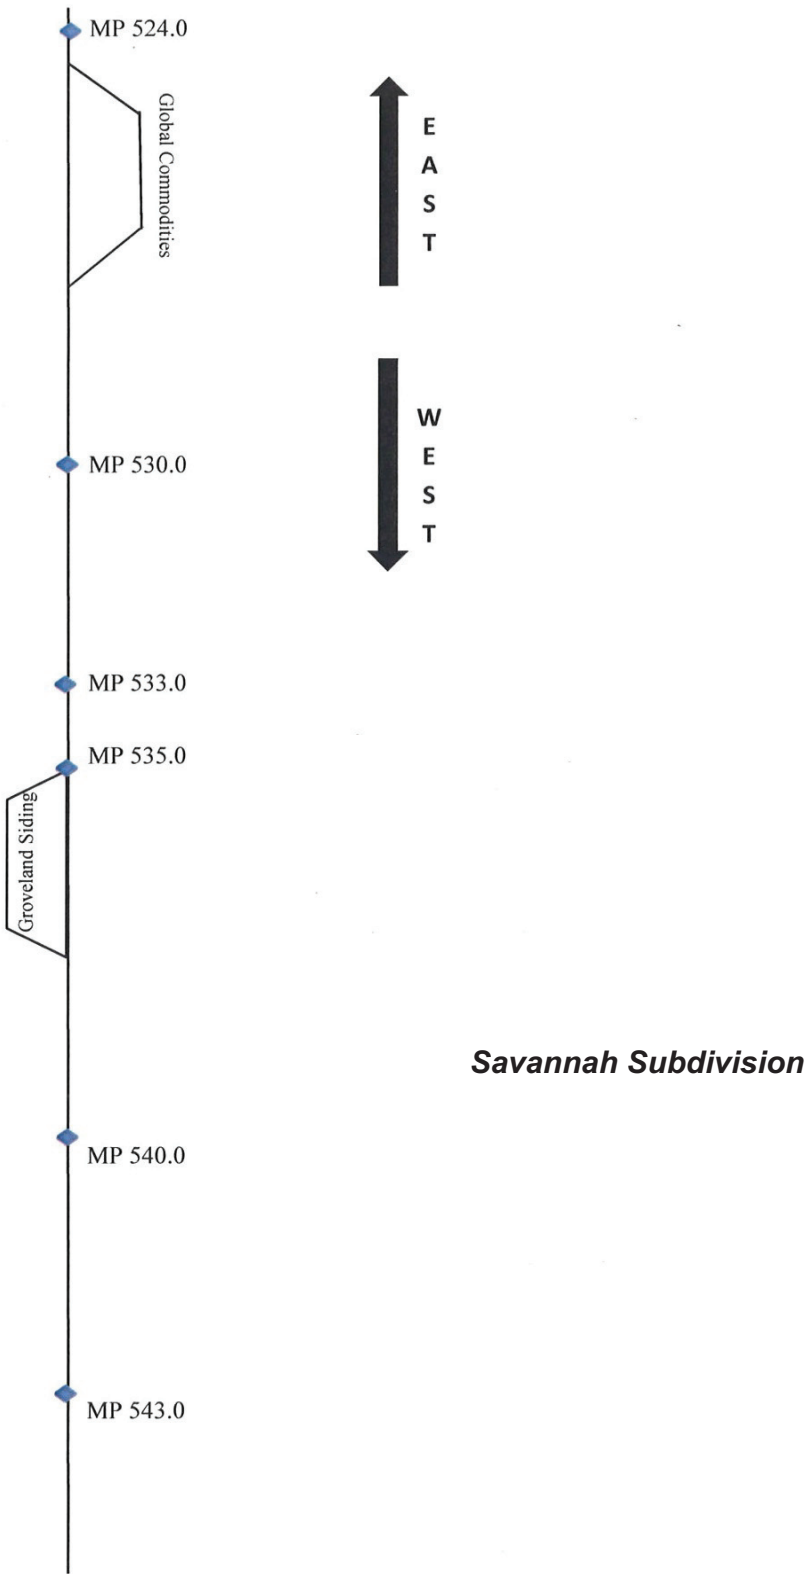


Georgia Central Railway

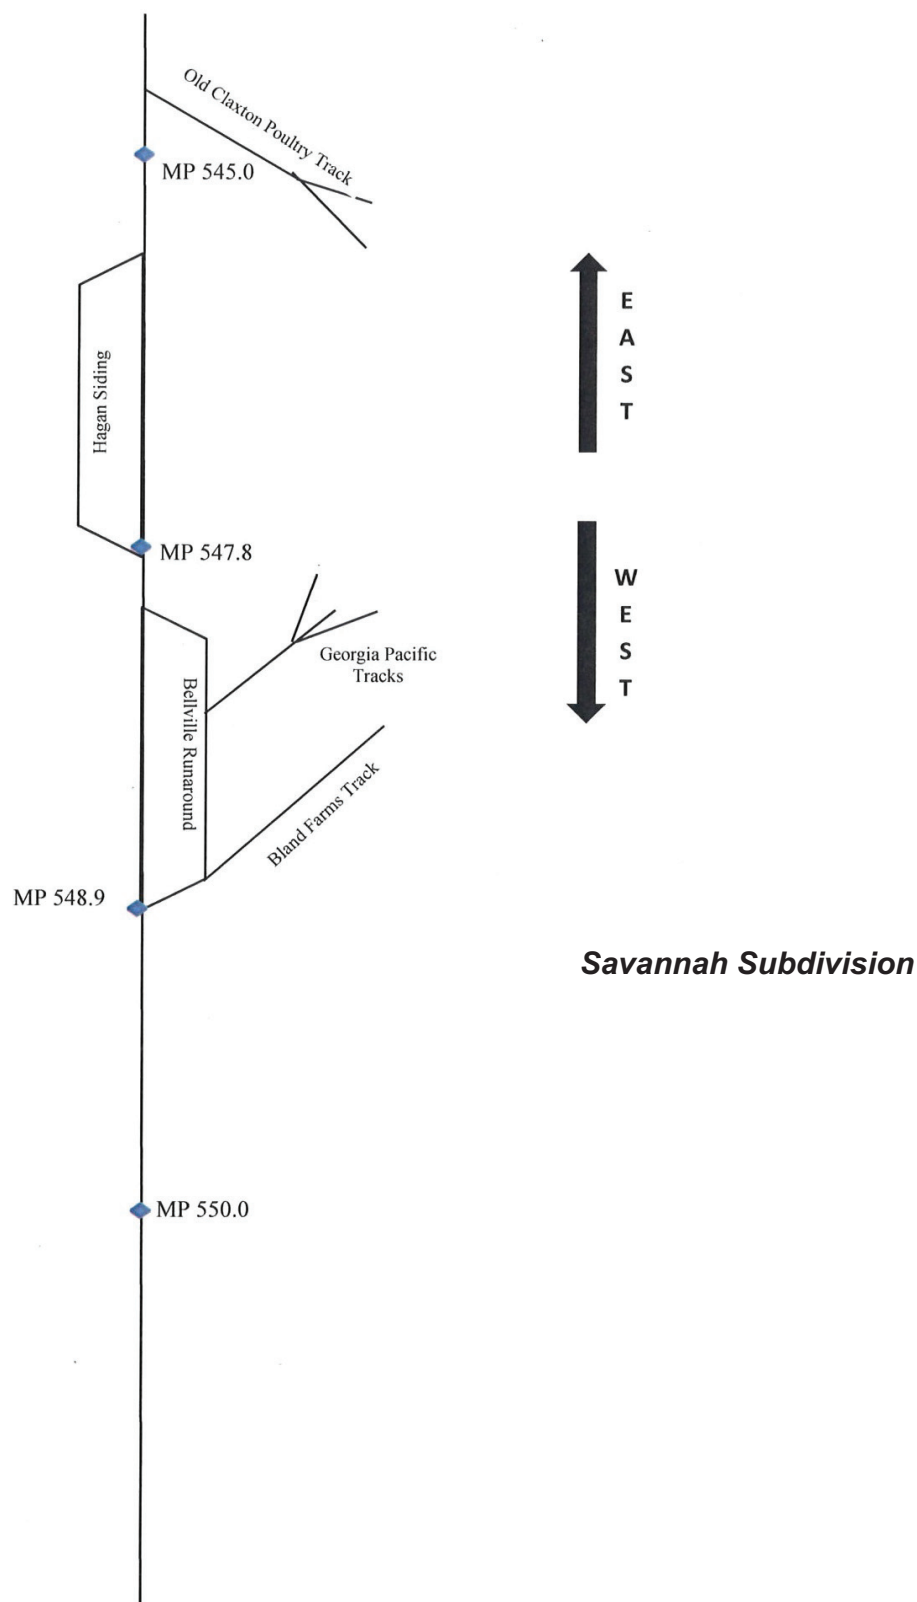

Georgia Central Railway

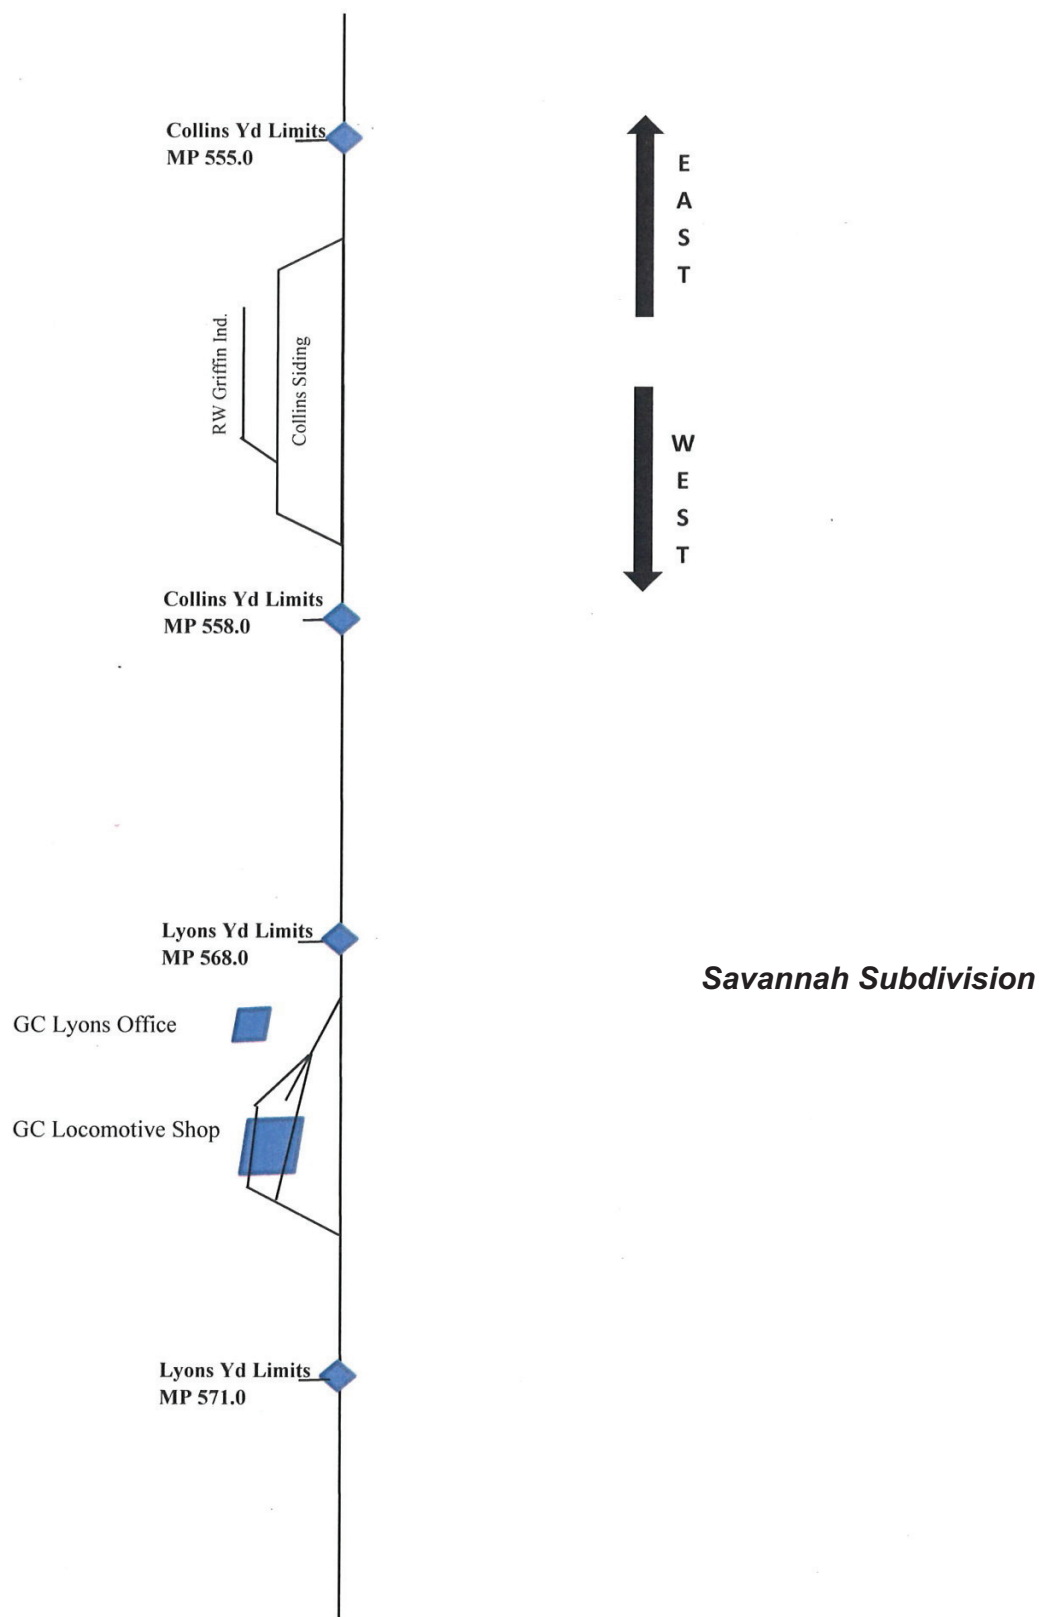

Georgia Central Railway

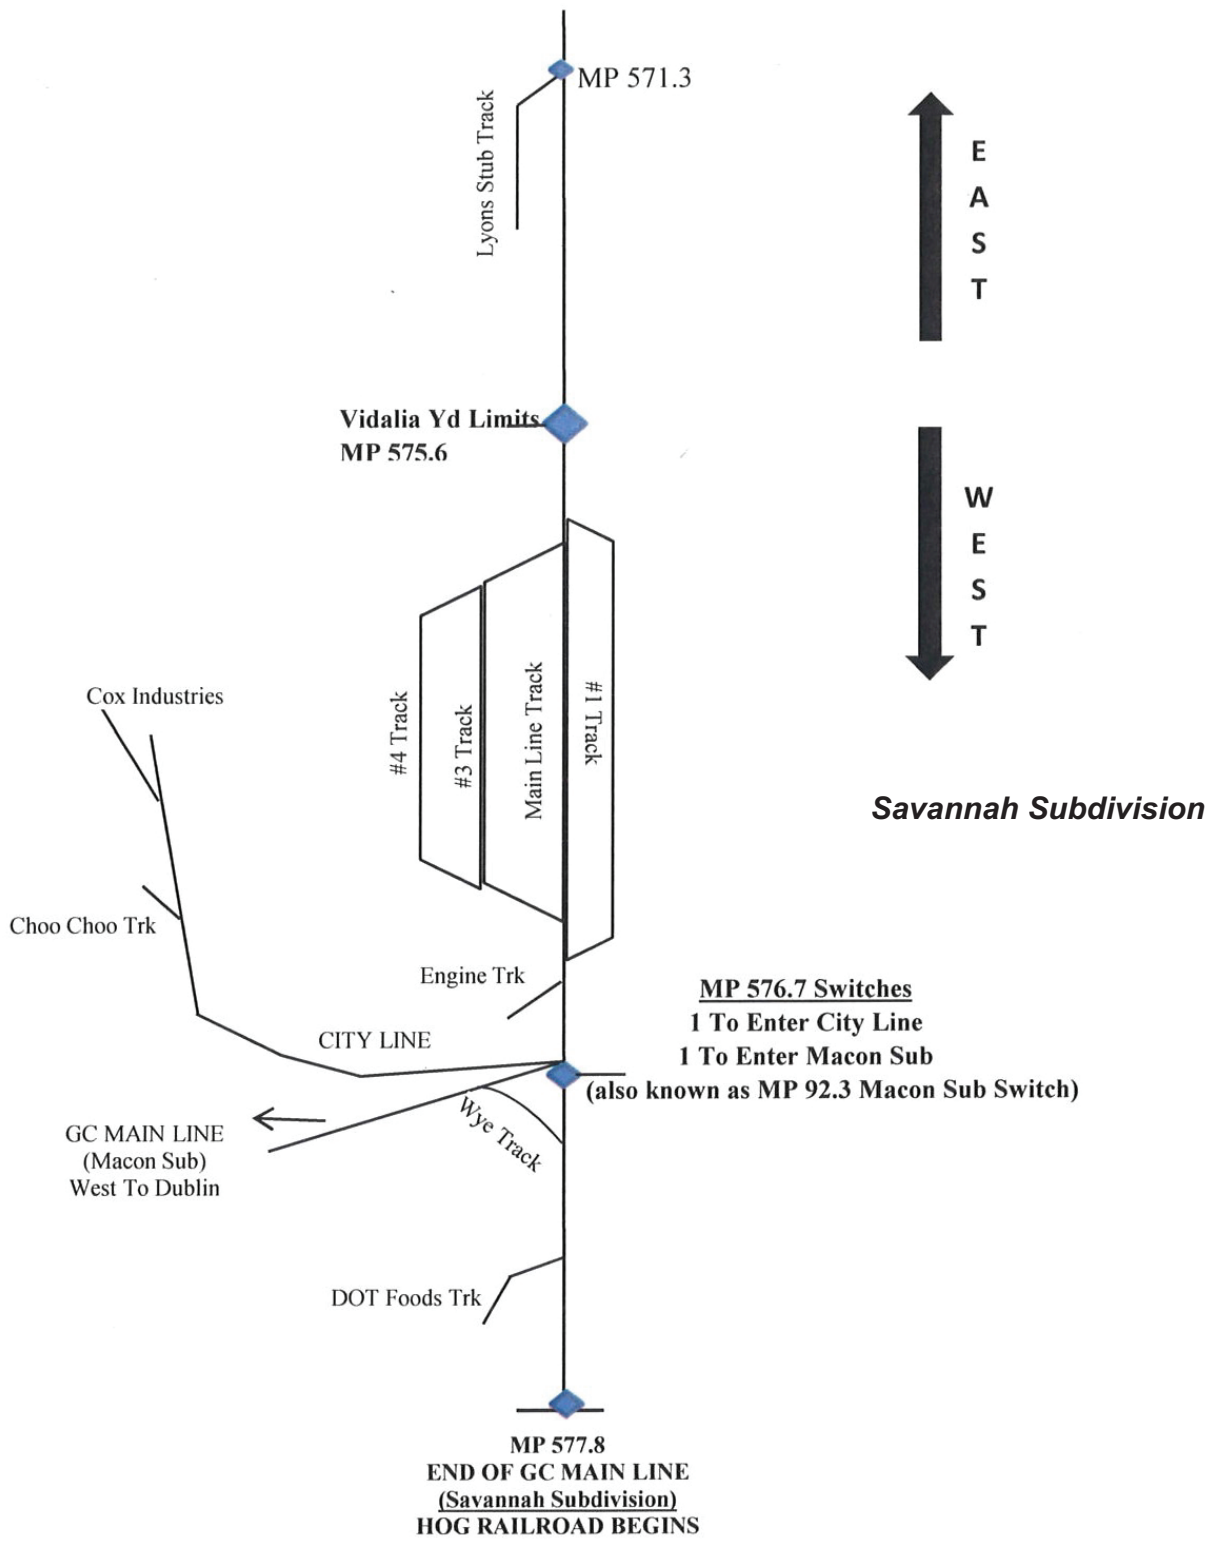

Georgia Central Railway

System Special Instructions- All Branches

SAFETY RULES AND PROCEDURES

G&W Transportation Safety Rules – RULE 1002

A new paragraph (f) is added to this Safety Rule relative to job briefing responsibility:

- f) When no immediate supervisor is present, the Conductor is responsible for holding a “Job Safety Briefing.”

G&W Transportation Safety Rules – RULE 1405

Add new rule:

Conductors and engineers are required to wear hard hats when working with Engineering and Mechanical departments at derailment/incident sites, rail trains or ballast trains.

G&W Transportation Safety Rules – RULE 1700

That part reading:

Place feet firmly and have a secure handhold whenever you are involved in any operation or situation on the ground or on equipment when necessary to maintain stability. Some examples are:

Revise to read:

Place feet firmly and have secure three points of contact whenever you are involved in any operation or situation on the ground or on equipment when necessary to maintain stability. Some example are:

G&W Transportation Safety Rules – RULE 1703

Revise paragraph (k) to read:

(k) On the end sill platform of any railcar, except that an employee riding a tank car must ride on the end platform of a tank car as governed by Transportation Safety Rule 1705.

Add paragraph (q), which reads:

(q) On the stirrup of railcars equipped with a single vertical handhold in the position where the employee is required to ride.

G&W Transportation Safety Rules – RULE 1705

Revise entire rule to read:

Be careful when riding, mounting or dismounting the equipment. Observe the following procedures:

- Except when riding a tank car, face the equipment and turn your head in the direction in which the equipment is moving. Keep your body as close as possible to the equipment.
- Choose a safe location for getting on or off equipment away from live tracks, main tracks, close clearances, areas of poor footing or other potential hazards. Ride the last car on a trailing movement if possible.
- Dismount equipment prior to the time of coupling.
- Use only the handhold, ladder, step, stirrup or other part designed and placed for the purpose of getting on or off equipment.
- When climbing a car or riding a car other than a tank car, position your heels against the outside edge of the rung or stirrup if possible. Otherwise, use the ball of your foot turned slightly sideways and pointed in the direction of movement.

- A trainman's lantern is the only item that you are allowed to carry when getting on or off equipment. The lantern should rest on the back of your hand with the bale on the palm between your thumb and forefinger.
- If a shoving platform is not available and is necessary to ride a car that is not the first or last car of the movement, always ride the leading end of a car in the direction of movement.
- When riding tank cars with single vertical hand holds:
 - Employees may only ride a tank car when no alternative positions are available and when the tank car is the leading car of a shoving movement or the last car of a pulling movement.
 - Employees must maintain at least three points of contact with both feet firmly on the end platform. If unable to place both feet securely on the end platform, an employee must not ride the car.
 - When riding a shoving movement, the employee must be positioned to ride on the end platform outside the gauge of rail, maintaining three points of contact and keeping a firm grip on the end safety rail. If unable to maintain a safe position, an employee must not ride the tank car.
 - When riding a pulling movement, the employee must be on the trailing end of the trailing tank car, facing the direction of movement, maintaining three points of contact and a firm grip on the end safety rail.
 - Do not ride on the center side ladder of a tank car.

G&W Transportation Safety Rules – RULE 1705(G)

Add new Safety Rules and Procedures:

Employees must dismount equipment prior to coupling. All other employees must be either on the ground, in the clear of the move or in an approved seat within the cab of a locomotive.

A safety stop must be made no less than 50 feet from any of the following:

- Bumping posts
- Stopping devices
- Coupling with light locomotives
- Closed gates or doors
- Clearance markers or points when required to shove to the clearance of a double ended track
- Initial coupling where cars are being loaded or unloaded on customer's track
- Coupling greater than 250 feet from the previous stop
- Coupling to cars on a descending grade, near the end of tracks, near highway crossing and inside building

A safety stop must be made no less than 100 feet from the following:

- A derail in the derailing position

A safety stop must be made no less than 150 feet from the following:

- The end of a spur/stub track, and a crew member must precede any further movement

Georgia Central Railway

G&W Transportation Safety Rules – RULE 1709

Add the following paragraph:

(g) A train or cut of cars consisting of intermodal cars equipped with crossover platforms without handholds and/or empty flatcars may be crossed through without three points of contact; taking short deliberate steps.

That part reading:

If equipment does not have the necessary safety appliance to crossover, separate the equipment by at least 50 feet or walk around the end of the coupled equipment.

Revise to read:

If equipment does not have the necessary safety appliances to crossover, separate the equipment by at least 100 feet or walk around the end of the coupled equipment.

G&W Transportation Safety Rules – RULE 1710

Add new item to Safety Rule and Procedure:

(g) The only exception for three-step protection is operating a bleed rod or a cut lever on standing equipment only.

That part reading:

(f) Make sure that equipment is separated by at least 50 feet before making any adjustments to uncoupled equipment.

Revise to read:

(f) Make sure that equipment is separated by at least 100 feet before making any adjustments to uncoupled equipment.

G&W Transportation Safety Rules – RULE 1711

That part reading:

(h) Separate equipment by at least 50 feet.

Revise to read:

(h) Separate equipment by at least 100 feet.

G&W Transportation Safety Rules – RULE 1920

That part reading:

Only qualified locomotive engineers may reset a crankcase overpressure device one time in order to return the engine to line. If after restarting, the device shuts the engine down again, the locomotive must remain isolated to its destination. The dispatcher or Mechanical Department must be notified immediately. Employees must never open air box covers, top deck covers or crank case lids. There is a possibility of an explosion if this is done.

Revise to read:

If the crankcase pressure device trips, the engine may not be restarted. The dispatcher or Mechanical Department must be notified immediately. Employees must never open air box covers, top deck covers or crank case lids. There is a possibility of an explosion if this is done.

Brake Sticks

In addition to the rules related to operating hand brakes, be advised that all employees required to apply or release hand brakes from standing rail equipment are required to use an approved brake stick for that purpose, with the exception of lever ratchet type hand brakes. If and only when an approved brake stick is unavailable or is deemed defective will hand brakes be secured by hand. Any time a brake stick is found defective, it must be reported immediately to your supervisor. Losing or forgetting a brake stick will not excuse you from performing your required duties.

Shoving/Backing Equipment and Vehicles

Any employee directing the shoving movement of equipment or the backing movement of equipment must remain at a stationary, designated place of safety until the movement is stopped, except in cases of emergency. Any employee directing these movements by radio or hand signals must maintain visual contact with a portion of the equipment or vehicle while movement is occurring.

Vehicle Backing

Any time an employee uses a company vehicle, they must use the following procedure to park that vehicle before exiting the vehicle. All vehicles must be backed into a designated parking spot unless the vehicle can be pulled through and positioned to head straight out when attempting to depart. If you are unable to pull through or unable to back into a designated parking spot, an alternate location must be selected that will allow for either of the two options noted in this policy.

OPERATING RULES

RULE 1.3.1

Add the following:

Roadway Worker Protection Rules and Maintenance of Way

Rules: Employees whose duties include the inspection; construction; and maintenance or repair of track, bridges, roadway, signals and machinery or who provide protection for other employees or themselves must have a current copy of these rules they can refer to while on duty. Affected employees must be familiar with and obey these rules and instructions.

RULE 1.33 – Inspection of Freight Cars

Fourth bullet point added:

Tie Down Chains/Cables – Cars equipped with tie down chains and/or cables must not be moved until the chains and/or cables are properly secured.

RULE 1.47.1 – Training and Familiarization

Add new rule:

Employees assigned to a position for the purpose of training or familiarization must be under the direct and immediate supervision of a qualified employee. While performing duties in connection with the movement of trains, the qualified employee must closely monitor the performance of the employee in training. The qualified employee must keep an unimpeded path to the employee in training and be able to take immediate action as necessary but not separated by more than one railcar length.

When necessary to ride equipment, the employee in training must ride on the opposite side of the leading end of the same car that the qualified employee is riding. If unsafe to ride at that position, the employee in training may ride on the same side as the qualified employee, on the leading end of the next car. Do not ride the cars if both of these positions are unsafe.

When performing duties as a conductor, employees must have a current certificate accessible to be able to display that certificate upon receiving a request to do so from a representative of the Federal Railroad Administration, an authorized State inspector, an officer

Georgia Central Railway

of the issuing railroad or an officer of another railroad when serving as a conductor in joint operations territory.

RULE 5.9.2 – Headlight Off

Item #2 revised to read:

The train is left unattended on the Main Track.

RULE 5.11 – Engine Identifying Number

Second and third paragraphs add:

The unit whose number is being used as the identifying number in track warrants and track bulletins must remain part of the train consist as long as these documents remain in effect.

If the identifying unit must be removed from the train, the train dispatcher will be immediately notified so that track warrants and track bulletins may be modified or replaced as required. A train will not depart the location where the identifying unit was removed without these new or modified documents, unless directed to do so by the train dispatcher or a company officer.

RULE 5.15 – Improperly Displayed Signals

Add third paragraph:

Any signal indicating a restrictive condition for which a crew is unable to determine the cause must be reported to a supervisor.

RULE 6.5 – Shoving Movements

These restrictions do not apply to:

- Equipment set up for push-pull operation when operating in “push” mode from the leading end of the movement.
- Shoving or pushing operations by helper locomotives assisting a train when a train is operated from the leading end in the direction of movement.
- Trains performing maintenance work under the direction of roadway workers in accordance with MOW rules.

RULE 6.13 – Yard Limits

Second paragraph revised to read:

All movements entering or moving within yard limits must be made at restricted speed, regardless of signal indication.

RULE 6.20 – Equipment Left on Main

Add the following paragraphs:

C. When necessary to leave any equipment unattended on mainline track outside yards or terminals:

1. After the equipment has been properly secured as required by AB&TH Rule 102.1, 102.1.1, 102.1.2 and/or 102.3, the crew must notify the dispatcher of the number of handbrakes applied and that their effectiveness has been verified as required.
2. At locations where dispatchers are not on duty, the information must be provided to another designated qualified railroad employee.
3. It is not necessary to contact the dispatcher or designated qualified employee when equipment is left unattended by a railroad employee(s) who is actively engaged in the following activities:
 - Picking up, setting off or repositioning cars at an industry;
 - Assembling cars from several tracks adjacent to the main track;

- Adding, removing or swapping locomotives; or
- Moving part of a train when doubling a hill or cutting crossings.

(These exceptions do not apply when employees are on break from their normal duties).

D. “Key Trains,” as defined by the “United States Hazardous Materials Instructions for Rail,” must not be left unattended on mainline track or mainline sidings outside of a yard or terminal until all requirements of EO 28 have been met, including notification to the FRA that a written plan is on file for inspection, as required by EO 28.

A. When it is necessary to leave a “Key Train” unattended due to emergencies or unforeseen operating conditions, such as impassable track or the need to double the hill, handbrakes must be applied to the unattended train or portion of the train in accordance to applicable GWI AB&TH Rules.

B. If it is necessary to leave a “Key Train” unattended on mainline track or mainline siding, the following information must be provided to the dispatcher or designated qualified railroad employee:

1. Number of handbrakes applied
 2. Effectiveness of the handbrakes has been verified as required
 3. Tonnage of the train or equipment to be left unattended
 4. Grade and terrain features of the track where train or equipment will be secured
 5. Relevant weather conditions
 6. Type of equipment being secured
 7. That the cab(s) of the controlling consist has been secured to prevent unauthorized access.
 8. The dispatcher or designated qualified employee must verify and confirm with the train crew that the securement meets all the railroad's requirements and record the information provided by the employee
 9. It is not necessary to contact the dispatcher or designated qualified employee when a “Key Train” is left unattended by a railroad employee(s) who is actively engaged in the following activities:
 - Picking up, setting off or repositioning cars at an industry;
 - Assembling cars from several tracks adjacent to the main track;
 - Adding, removing or swapping locomotives; or
 - Moving part of a train when doubling a hill or cutting crossings.
- (These exceptions do not apply when the employee(s) are on break from their normal duties.)

RULE 6.21.3 – Track Obstruction/Unusual Conditions

Revise entire rule to read:

When a train is advised in the words, “Between (location) and (location) be governed by Rule 6.21.3” within the specified limits, the train must move at Restricted Speed and be able to stop short of any adverse track conditions that will affect the safe operation of the train.

Georgia Central Railway

RULE 6.23 – Emergency Stop or Severe Slack Action

Add as last paragraph:

The entire train must be inspected for derailed cars, shifted loads or other conditions affecting safe train movement. Promptly report results on the inspection to the train dispatcher or proper authority.

RULE 6.32.1 – Providing Warning Over Road Crossings

Revise to read:

When cars are shoved over road crossings at grade, an employee must be on the ground at the crossing to provide warning until crossing is occupied. Make any movement over the crossing only on the employee's signal. Warning is not required when crossing is equipped with:

- Gates that are fully lowered.

Shoving movements must not exceed 15 MPH over crossing until occupied.

RULE 6.32.2 – Automatic Warning Devices

Revise to read:

Change the first paragraph and bullet points to read:

Under any of the following conditions, a movement must not foul a crossing equipped with automatic warning devices until the device has been operating long enough to provide warning and the crossing gates, if equipped, are fully lowered:

- Movement has stopped within 3,000 feet of the crossing.
 - Movement is within 3,000 feet of the crossing and speed has increased by more than 5 MPH.
 - Movement is closely following another movement.
 - Movement is on other than the main track or siding
 - Movement enters a main track or siding within 3,000 feet of the crossing.
- or

When notified by track bulletin that a road crossing at grade equipped with automatic warning devices is set to Island Circuit Only and after stopping within the Island Circuit..

Employees must observe all automatic warning devices and report any that are malfunctioning to the train dispatcher by the first available means of communication. Notify all affected trains as soon as possible.

If equipped, when the white power-on light on the exterior of the signal house is not lit, or when a strobe light on the exterior of the signal house is flashing, immediately notify the train dispatcher. Where a "STOP" sign is located next to a road crossing, movement must stop at the "STOP" sign.

Movement may proceed only after automatic crossing warning devices have been operating long enough to provide warning and crossing gates, if equipped, are fully lowered. If automatic crossing warning devices fail to operate, movement may enter the crossing only after a crew member is on the ground at the crossing to warn highway traffic.

B. Whistle for Crossing

When notified that automatic warning devices are malfunctioning, sound whistle signal 5.8.2(7), regardless of any prohibition.

RULE 6.32.2 – A. Automatic Warning Devices Malfunctioning

Revise entire note to read:

NOTE: An equipped flagger is a person other than a crew member who is wearing approved "High-Visibility" outerwear. At night, the outerwear must include approved retro-reflective striping. The flagger must be equipped with a red flag or stop paddle by day and a light at night.

RULE 7.1 – Switching Safely and Efficiently

That part reading:

Equipment may be left on a:

- Main track, fouling a siding switch, when the switch is lined for the main track.
- Siding, fouling a main track switch, when the switch is lined for the siding.
- Yard switching lead, fouling a yard track switch when the switch is lined for the yard switching lead. Or
- Industry track beyond the clearance point of the switch leading to the industry.

Revise to read:

Only after receiving permission from the transportation supervisor, equipment may be left on a:

- Main track, fouling a siding switch, when the switch is lined for the main track.
- Siding, fouling a main track switch, when the switch is lined for the siding.
- Yard switching lead, fouling a yard track switch when the switch is lined for the yard switching lead. Or
- Industry track beyond the clearance point of the switch leading to the industry.

RULE 7.1.1 – Position of Switches and Derails

Add new rule:

When using radio communication during shoving movements or movements where the engineer's view of the switch and/or derail is obscured, the employee directing the movement must convey to the engineer that the switches and/or derails have been positioned correctly. The engineer will acknowledge the information and instruct the employee operating the switches and/or derail to "double-check" the switches and/or derail. Movement must not proceed until the switches and/or derail has been double-checked and the engineer receives confirmation of that fact.

RULE 7.1.2 – Safety Stops

Add new rule:

A safety stop must be made no less than 50 feet from any of the following:

- Bumping post
- Stopping devices
- Coupling with light locomotives
- Closed gates or doors
- Clearance markers when required to shove to the clearance of a double-ended track
- Initial coupling where cars are being loaded or unloaded
- Couplings greater than 250 feet from previous stop
- Coupling to cars on a descending grade, near end of tracks, near highway crossings and inside buildings.

Georgia Central Railway

After safety stop has been completed, movement may resume in accordance with applicable rules.

RULE 7.7 – Kicking or Dropping Cars

Revise entire rule to read:

Kicking or dropping cars is not permitted. All couplings shall be controlled and shoved to rest with equipment coupled to working locomotive or motorized on-track equipment.

RULE 7.7.1 – Gravity Switch Moves

Revise entire rule to read:

Gravity switch moves are prohibited.

RULE 7.11 – Charging Necessary Air Brakes

Revise entire rule to read:

Do not handle cars or switch cars in trains or conduct yard movements without coupling all air hoses and charging the air brake system before movement is made.

RULE 8.3 – Main Track Switches

That part reading:

Before leaving the location where a hand-operated main track switch was operated:

- Crew members must confirm the position of the switch with each other.
- Engineering department employees granted authority to enter working limits must confirm the position of the switch with the employee in charge or a designated employee who will notify the employee in charge.

Revise to read:

Before leaving the location where a hand-operated main track switch was operated:

- Switch Position Awareness Form (SPAF) must be completed as required and outlined on the form instruction.
- Crew members must confirm the position of the switch with each other.
- Engineering department employees granted authority to enter working limits must confirm the position of the switch with the employee in charge or a designated employee who will notify the employee in charge.

RULE 8.6 – Restoring Switch to Normal Position

Revise entire rule to read:

An employee must not get off moving equipment to return any switch to normal position. When possible, get off the standing equipment on the opposite side from the switch stand.

RULE 8.18 – Variable Switches

Revise entire rule to read:

Trailing point movements may not be made over a variable switch from either track without lining the switch for movement through the switch.

RULE 8.20 – Derail Location and Position

Revise third paragraph to read:

All derails must be left in the derailing position unless they are lined to the non-derailing position to allow engines, trains, railcars and/or on-track equipment to pass. Unattended equipment left in any track protected by a derail must be left secured at least 50 feet from the derail.

RULE 14.13 – Mechanical Transmission of Track Warrants

That part reading:

Repetition is not required when track warrants are transmitted mechanically. The “OK” time will be given when the track warrant is issued.

Revise to read:

Verification with the dispatcher is required when track warrants are transmitted mechanically. The “OK” time will be given when the track warrant is issued.

RULE 14.5 – Protecting Men or Equipment

Delete the following paragraph:

When so authorized, trains may move as specified by the employee in charge. Restricted speed as indicated by line 12 applies within the limits, unless a higher or lower speed is specified by employee in charge.

RULE 15.1 – Track Bulletins

Add the following paragraph:

Daily Operating Bulletins (DOB) may be issued in lieu of Track Bulletins. All rules and instructions governing the issuance and use of Track Bulletins also apply to DOB. DOB are issued as needed to contain:

- Speed restrictions (Track Bulletin) Form A.
- Protection of men or on-track equipment (Track Bulletin Form B).
- Other unusual conditions (Form C).
 - Each DOB supersedes the previous DOB
 - Employees must always review the entire DOB for completeness.
 - Additions to DOB are permitted in accordance with Rule 15.7.
 - Deletions to DOB are permitted in accordance with Rule 15.13.
 - Employees whose duties are affected by a time table must have a current copy of the DOB. This DOB can be considered to be in effect for that entire tour of duty.

Other relevant operating information as determined by the dispatcher or operating department.

SPEED INSTRUCTIONS

None

EQUIPMENT INSTRUCTIONS

None

MISCELLANEOUS INSTRUCTIONS

Standard Time:

Eastern Standard Time will govern all Georgia Central Railway (GC) operations.

Maximum Operating Speeds:

Train and on-track equipment speeds specified by rules, special instructions, signal indications, track bulletins or other means must be maintained to the extent feasible, consistent with safety, but must not

Georgia Central Railway

be exceeded. Where there is a difference in speeds, the lowest speed will govern.

Consist Verification:

All crews receiving trains on line of road or picking up cars on foreign railroad must verify that the cars received correspond to the delivery list by comparing at least six (6) cars of each track or cut of cars to the train list furnished by the delivering road crew or railroad.

Consists:

Manifest trains are restricted to 110 cars. Additionally, a block of 30 or more consecutive empty cars, regardless of car type, must be operated on the rear of the train.

Prevention of Harmonic Rock:

The critical speed range for harmonic rock is between 13 and 19 MPH. Every effort must be made to operate trains at speeds above or below these limits except when:

- An engine is operating at its maximum power output.
- The train is operating on ascending grades.
- Automatic brakes are applied.

Trains operated in a draft condition are less susceptible to harmonic rock. While in the critical speed range, the engineer and conductor should make a constant and careful observation of as much of their train as possible to determine if any cars are rocking excessively.

Highway/Rail Grade Crossing Signal Boxes:

An illuminated white light above the door of a signal box at highway/rail grade crossings indicates that the AC power is being used for an active device(s) at that location. When the light is flashing or not illuminated, AC power is not being used, and the crossing warning device(s) is operating on battery power only. Extended battery operation of crossing warning devices can affect the safety of the crossing. Contact the train dispatcher and report the crossing location if the light on the signal box is flashing or not illuminated.

Operational Testing:

When performing operational testing, stop signal appliances, such as an unattended burning fusees, red flags, red lights, banners or barricades, displaying the words "STOP" or "STOP OBSTRUCTION" may be used to test for compliance with GCOR Rules 6.27 and 6.28. When unattended burning fusees are used to test for this purpose, after the officer identifies themselves, the officer may allow the movement to depart the testing site without complying with restricted speed as required by GCOR Rule 5.6.

Mandatory Directives:

When a train crew or maintenance crew is to receive any mandatory directive, all members of that crew must be present and listening to the entire exchange between the train dispatcher and the crew member copying the mandatory directive. In addition, when reporting clear of track warrant limits, the employee reporting clear must have a physical possession of all copies of the track warrant being voided, with each copy to be marked "VOID."

AIR BRAKE AND TRAIN HANDLING

None

Notes:



Georgia Central Railway, L.P. (GC)
186 Winge Road
Lyons, Georgia 30436
912-526-6165