




PARASMANI

tubes you can rely on

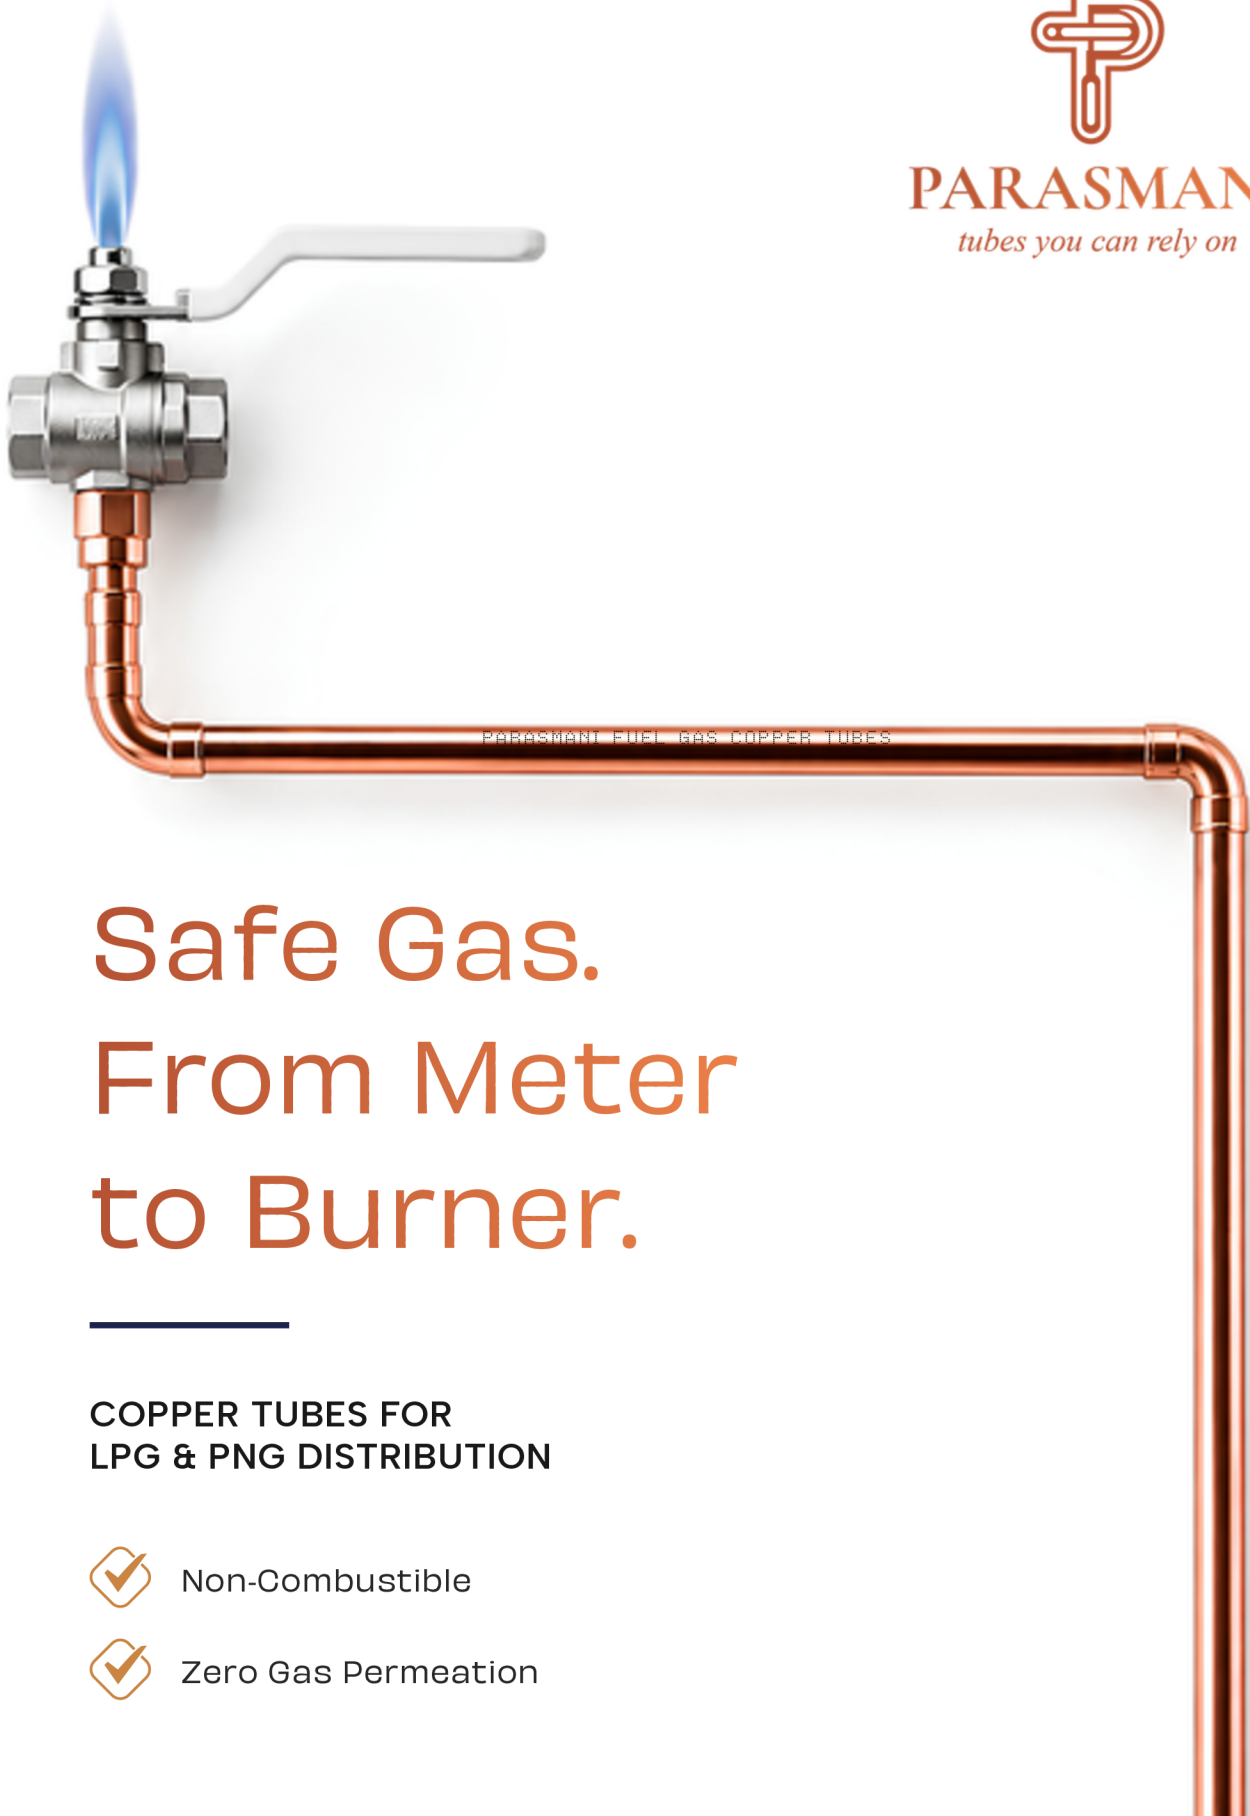

Safe Gas. From Meter to Burner.

**COPPER TUBES FOR
LPG & PNG DISTRIBUTION**

- ✓ Non-Combustible
- ✓ Zero Gas Permeation

Copper Tubes
by Parasmani





Parasmani

is a leading manufacturer of high-quality copper tubes, serving medical gas, HVAC, refrigeration, plumbing, fuel gas and industrial applications across India. With an annual production capacity exceeding 3,600 MT, Parasmani is recognised for consistent quality and technical precision—trusted by gas contractors, MEP consultants, infrastructure contractors and distributors across India through a strong Pan-India network and strategic stock points.

Parasmani makes seamless copper tubes for LPG and PNG distribution from the utility meter to every burner inside the building. Fuel gas piping isn't a plumbing choice; it's a life-safety decision. Copper is the only common piping material that behaves predictably in every failure mode that matters: it doesn't burn, doesn't leak gas through the wall, doesn't age out of specification.

Manufactured in compliance with: BS EN 1057, ASTM B837

Why Copper for Gas

Gas piping runs are largely invisible once a building is finished — behind cladding, above false ceilings, inside shafts. What sits there for the next fifty years has to be built for the worst day, not the average day. Copper is the material every serious code recommends for this reason: it survives a building fire without feeding it, and it holds its seal without inspection.

COPPER vs ALTERNATIVES			
Property	Copper	Flexible SS Hose	HDPE / Plastic
Fire Behaviour	Non-combustible	Seals fail under heat	Burns / Toxic Fumes
Gas Permeation	Zero	Very Low	Increases with Age
Permitted Above Ground	Yes — full run	Appliance connection only	No — buried service only
Service Life	50+ Years	10-15 Years	Not rated for exposed service





Pure at the Core

Manufactured from C12200 DHP (phosphorus-deoxidized copper) at 99.90% purity. Consistent wall thickness gives predictable pressure performance across the full run, and every consignment ships with mill test certificates for consultant and contractor sign-off.

Material Grade	C12200 (DHP) / CW024A
Copper Content	Cu 99.90% minimum (including silver)
Phosphorus (deoxidizer)	0.015–0.040%

Product	O.D. Range	W.T. Range	Temper	Length
Straight Copper Tubes	6 mm – 130 mm	0.70 mm – 3.25 mm	H / HH / QH	3 m
Pancake Copper Coils	4.76 mm – 22.23 mm	0.40 mm – 1.20 mm	Soft Annealed	15.24 m
Copper Fittings	6 mm – 108 mm	0.60 mm – 2.50 mm	Wrought type	–

Parasmani — Typical Gas Piping Sizes

Hard straight tubes are used for risers, floor mains and branch distribution, while soft annealed pancake coils are ideal for long jointless runs, concealed piping and tight-radius bends.

PARASMANI STRAIGHT COPPER TUBES STANDARD LENGTH 3 MTR			
O.D. (mm)	W.T. (mm)	Weight/Mtr (kg)	Typical Use
12	1.0	0.309	Kitchen branch, single point
15	1.0	0.394	Flat distribution, small commercial
22	1.0	0.590	Floor riser, medium commercial
28	1.2	0.903	Building riser, hotel kitchen
35	1.2	1.140	Main riser, large building
42	1.5	1.706	Central gas supply mains

The sizes shown are typical recommendations only. Final tube selection should be verified by a licensed gas contractor or qualified engineer in accordance with project requirements and local regulations.



Copper Fittings

Copper gas fittings are end-feed type, manufactured from the same grade of copper as the tube and in accordance with BS EN 1254-1. Suitable for LPG and PNG installations, they provide secure, leak-tight joints and are designed for safe, reliable performance when installed in accordance with applicable gas codes and standards.

PARASMANI COPPER FITTINGS | PRODUCT RANGE & SPECIFICATIONS | BS EN 1254-1

Fitting Type	Size Range – O.D. (mm)	≈ Size Range (inches)	Wall Thickness (mm)	≈ Wall Thickness (SWG)
90° Elbow C × C	6 mm – 108 mm	3/16" – 4"	0.6 mm – 2.5 mm	24 SWG – 12 SWG
Coupling C × C	6 mm – 108 mm	3/16" – 4"	0.6 mm – 2.5 mm	24 SWG – 12 SWG
Reducing Coupling C × C	8 × 6 mm – 108 × 76 mm	1/4" × 3/16" – 4" × 3"	0.6 mm – 2.5 mm	24 SWG – 12 SWG
Equal Tee C × C × C	6 mm – 108 mm	3/16" – 4"	0.6 mm – 2.5 mm	24 SWG – 12 SWG
Reducing Tee C × C × C	8 × 6 mm – 108 × 76 mm	1/4" × 3/16" – 4" × 3"	0.6 mm – 2.5 mm	24 SWG – 12 SWG

For detailed installation guidelines, best practices and joining procedures, please visit our website or scan the QR code.



Contact Us

Get in touch today for pricing, technical specifications, and project enquiries.



+91 98191 34044 / +91 81698 08254



Factory: 5/2, GIDC, Umbergaon,
Valsad, Gujarat – 396171



sales@parasmanicopper.com



Parasmani

www.parasmanicopper.com