



PARASMANI  
*tubes you can rely on*

# Leading the race towards **CARBON FREE** cooling



★ ★ ★  
**100%**  
EDDY CURRENT  
TESTED

★ ★ ★  
MADE FROM  
**100%**  
COPPER CATHODES

**Copper Tubes**  
by Parasmani



# Parasmani

is a leading manufacturer of high-quality copper tubes, serving HVAC, refrigeration, medical gas, plumbing, and industrial applications across India. With an annual production capacity exceeding 3,600 MT, Parasmani is recognised for consistent quality and technical precision. The company has built a strong reputation as a dependable partner to OEMs, contractors, infrastructure developers, and industrial clients, representing reliability, performance, and disciplined manufacturing practices. With a strong Pan India network and strategic stock points, Parasmani ensures reliable, timely supply nationwide while serving international markets with trusted global partnerships.

Production is carried out in strict compliance with applicable standards:  
IS, JIS H3300, ASTM B68, ASTM B75, ASTM B88, ASTM B280, BS EN 1057, BS 2871, EN 12735

Our Brands


  
PARASMANI

  
PTP K-SERIES

## Raw Materials

A-grade Copper Cathodes  
with 99.99% purity.

## Copper Manufacturing Process

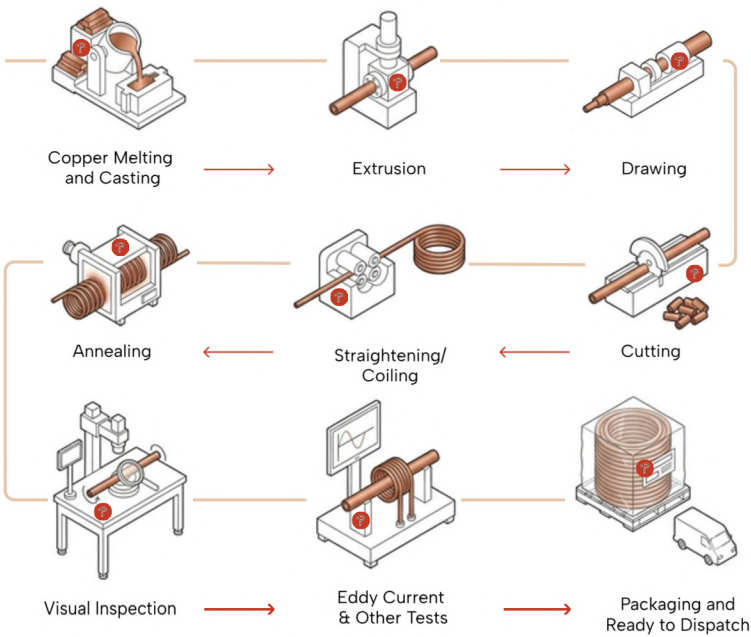

## 9-Step Quality Assurance Process

- 01 Chemical Composition Analysis
- 02 Hydrostatic Pressure Test
- 03 Eddy Current Test
- 04 Freedom from Defects
- 05 Pneumatic Pressure Test
- 06 Drift Expanding Test
- 07 Flattening Test
- 08 Hydrogen Embrittlement Test
- 09 Internal Cleanliness Test


## Chemical and Mechanical Properties

| Standard        | Copper Alloy No./Grade | Chemical Composition   |                | Mechanical Properties |                        |                    |                         |                  |                           |
|-----------------|------------------------|------------------------|----------------|-----------------------|------------------------|--------------------|-------------------------|------------------|---------------------------|
|                 |                        | Cu%                    | P%             | Temper                | Tensile Strength (MPa) | Elongation % (Min) | Average Grain Size (mm) | Hardness         | Internal Bore Cleanliness |
| JIS H3300       | C12200                 | 99.90% Min.            | 0.015 – 0.040% | Soft Annealed (O)     | 205 Min.               | 40                 | 0.025 – 0.060           | 60 VPN Max       | NA                        |
|                 |                        |                        |                | Half Hard             | 245 – 325              | NA                 | NA                      | 70 – 110 VPN     | NA                        |
|                 |                        |                        |                | Hard                  | 315 Min.               | NA                 | NA                      | 100 VPN Min      | NA                        |
| ASTM B68        | C12200                 | 99.90% Min.            | 0.015 – 0.040% | Soft Annealed (O60)   | 210 Min.               | 40                 | 0.040 Min.              | NA               | NA                        |
| ASTM B280       | C12200                 | 99.90% Min.            | 0.015 – 0.040% | Soft Annealed (O60)   | 205 Min.               | 40                 | 0.040 Min.              | NA               | 0.038 g/m² Max.           |
|                 |                        |                        |                | Hard (H58)            | 250 Min.               | NA                 | NA                      | NA               | -                         |
| ASTM B75        | C12200                 | 99.90% Min.            | 0.015 – 0.040% | Half Hard (H55)       | 250 – 325              | NA                 | NA                      | 30 – 60 (HR 30T) | NA                        |
|                 |                        |                        |                | Hard (H80)            | 310 Min.               | NA                 | NA                      | 55 Min. (HR 30T) | NA                        |
| IS 10773 : 2025 | Cu-DHP                 | 99.90% Min. (Cu + Ag%) | 0.015 – 0.040% | Soft Annealed         | 210 Min.               | 40                 | 0.040 Min.              | NA               | 0.038 g/m² Max.           |
|                 |                        |                        |                | Hard Drawn            | 290 Min.               | NA                 | NA                      | NA               | 0.038 g/m² Max.           |

## Product Range

### Straight Copper Tubes

|                             |                               |
|-----------------------------|-------------------------------|
| Temper                      | Hard, Half Hard, Quarter Hard |
| Size Range (Outer Diameter) | 6 mm to 130 mm                |
| Wall Thickness              | 0.70 mm to 2.0 mm             |
| Length                      | Up to 6000 mm                 |

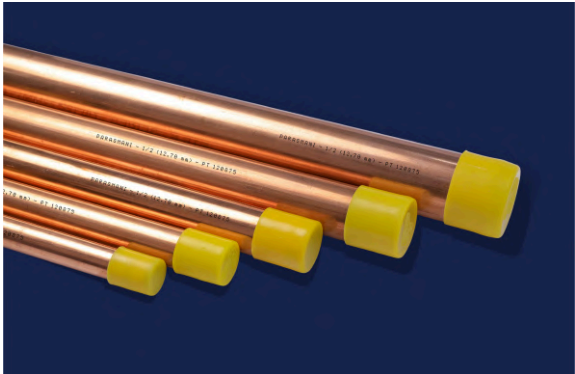

### Pancake Copper Coils

|                             |                     |
|-----------------------------|---------------------|
| Temper                      | Soft Annealed       |
| Size Range (Outer Diameter) | 4.76 mm to 22.23 mm |
| Wall Thickness              | 0.4 mm to 1.2 mm    |
| Length                      | 3000 mm to 16000 mm |



### Copper Fittings

|                              |                                                                                |
|------------------------------|--------------------------------------------------------------------------------|
| Types                        | Elbow, 45° Elbow, Long Elbow, Coupling, Reducer, Tee, U Bend, End Cap and more |
| Size Range (Inside Diameter) | 6 mm to 130 mm                                                                 |
| Wall Thickness               | 0.7 mm to 2.0 mm                                                               |



## Parasmani Copper Fittings — Product Range & Specifications| ASME B16.22

| Fitting Type            | Size Range (ID) mm                  | Size Range (inches)           | Wall Thickness    | Wall (SWG)      |
|-------------------------|-------------------------------------|-------------------------------|-------------------|-----------------|
| 90° Elbow C x C         | 6.35 mm – 130.18 mm                 | 1/4" – 5-1/8"                 | 0.71 mm – 3.25 mm | 22 SWG – 10 SWG |
| 45° Elbow C x C         | 6.35 mm – 130.18 mm                 | 1/4" – 5-1/8"                 | 0.71 mm – 3.25 mm | 22 SWG – 10 SWG |
| Coupling C x C          | 6.35 mm – 130.18 mm                 | 1/4" – 5-1/8"                 | 0.71 mm – 3.25 mm | 22 SWG – 10 SWG |
| Reducing Coupling C x C | 9.53 x 6.35 mm – 130.18 x 104.78 mm | 3/8" x 1/4" – 5-1/8" x 4-1/8" | 0.71 mm – 3.25 mm | 22 SWG – 10 SWG |
| Equal Tee C x C x C     | 6.35 mm – 130.18 mm                 | 1/4" – 5-1/8"                 | 0.71 mm – 3.25 mm | 22 SWG – 10 SWG |
| Reducing Tee C x C x C  | 9.53 x 6.35 mm – 130.18 x 104.78 mm | 3/8" x 1/4" – 5-1/8" x 4-1/8" | 0.71 mm – 3.25 mm | 22 SWG – 10 SWG |
| Return Bend C x C       | 6.35 mm – 130.18 mm                 | 1/4" – 5-1/8"                 | 0.71 mm – 3.25 mm | 22 SWG – 10 SWG |

## Dimensional Details and Pressure Rating

| PARASMANI - VRV/VRF COPPER TUBES AS PER JIS H3300   STANDARD PIPE LENGTH: 3 MTR        |             |                |                  |                     |                      |                      |                            |                         |                  |
|----------------------------------------------------------------------------------------|-------------|----------------|------------------|---------------------|----------------------|----------------------|----------------------------|-------------------------|------------------|
| Ø Size (inches)                                                                        | Ø Size (mm) | Thickness (mm) | ≈Thickness (SWG) | Weight per Ft. (KG) | Weight per Mtr. (KG) | Weight per Pipe (KG) | Max Working Pressure (MPa) | Bursting Pressure (MPa) | Pipes Per bundle |
| 1/4"                                                                                   | 6.35        | 0.80           | 21               | 0.039               | 0.125                | 0.380                | 44.14                      | 88.27                   | 100              |
| 3/8"                                                                                   | 9.53        | 0.80           | 21               | 0.061               | 0.197                | 0.600                | 28.35                      | 56.69                   | 50               |
| 1/2"                                                                                   | 12.70       | 0.80           | 21               | 0.082               | 0.268                | 0.810                | 20.90                      | 41.79                   | 50               |
| 5/8"                                                                                   | 15.88       | 0.80           | 21               | 0.104               | 0.339                | 1.020                | 16.54                      | 33.07                   | 40               |
| 5/8"                                                                                   | 15.88       | 1.00           | 19               | 0.128               | 0.418                | 1.260                | 20.89                      | 41.78                   | 30               |
| 3/4"                                                                                   | 19.05       | 0.80           | 21               | 0.126               | 0.411                | 1.240                | 13.69                      | 27.38                   | 30               |
| 3/4"                                                                                   | 19.05       | 1.00           | 19               | 0.155               | 0.507                | 1.530                | 17.26                      | 34.52                   | 25               |
| 7/8"                                                                                   | 22.23       | 0.80           | 21               | 0.147               | 0.482                | 1.450                | 11.67                      | 23.34                   | 25               |
| 7/8"                                                                                   | 22.23       | 1.00           | 19               | 0.182               | 0.597                | 1.800                | 14.70                      | 29.40                   | 20               |
| 1"                                                                                     | 25.40       | 0.88           | 20               | 0.186               | 0.607                | 1.830                | 11.23                      | 22.45                   | 25               |
| 1"                                                                                     | 25.40       | 1.00           | 19               | 0.210               | 0.686                | 2.060                | 12.81                      | 25.61                   | 20               |
| 1 1/8"                                                                                 | 28.58       | 1.00           | 19               | 0.237               | 0.775                | 2.330                | 11.34                      | 22.68                   | 15               |
| 1 1/4"                                                                                 | 31.75       | 1.10           | 18.5             | 0.289               | 0.947                | 2.850                | 11.23                      | 22.45                   | 15               |
| 1 3/8"                                                                                 | 34.93       | 1.21           | 18               | 0.350               | 1.146                | 3.440                | 11.23                      | 22.45                   | 10               |
| 1 1/2"                                                                                 | 38.10       | 1.32           | 17.5             | 0.416               | 1.364                | 4.100                | 11.23                      | 22.45                   | 10               |
| 1 5/8"                                                                                 | 41.28       | 1.43           | 17               | 0.488               | 1.601                | 4.810                | 11.23                      | 22.45                   | 8                |
| PARASMANI - VRV/VRF COPPER TUBES AS PER JIS H3300   STANDARD COIL LENGTH: 15.24 MTR    |             |                |                  |                     |                      |                      |                            |                         |                  |
| Ø Size (inches)                                                                        | Ø Size (mm) | Thickness (mm) | ≈Thickness (SWG) | Wt. per Ft. (KG)    | Wt. per Mtr. (KG)    | Wt. per Coil (KG)    | Max Working Pressure (MPa) | Bursting Pressure (MPa) | Coils Per Box    |
| 1/4"                                                                                   | 6.35        | 0.80           | 21               | 0.039               | 0.125                | 1.900                | 19.15                      | 57.44                   | 12               |
| 3/8"                                                                                   | 9.53        | 0.80           | 21               | 0.061               | 0.197                | 3.000                | 12.30                      | 36.90                   | 9                |
| 1/2"                                                                                   | 12.70       | 0.80           | 21               | 0.082               | 0.268                | 4.100                | 9.07                       | 27.20                   | 7                |
| 5/8"                                                                                   | 15.88       | 0.80           | 21               | 0.104               | 0.339                | 5.150                | 7.17                       | 21.52                   | 5                |
| 5/8"                                                                                   | 15.88       | 1.00           | 19               | 0.128               | 0.418                | 6.350                | 9.06                       | 27.19                   | 5                |
| 3/4"                                                                                   | 19.05       | 1.00           | 19               | 0.155               | 0.507                | 7.750                | 7.49                       | 22.47                   | 4                |
| PARASMANI - NON VRV/VRF COPPER TUBES AS PER ASTM B68   STANDARD COIL LENGTH: 15.24 MTR |             |                |                  |                     |                      |                      |                            |                         |                  |
| Ø Size (inches)                                                                        | Ø Size (mm) | Thickness (mm) | ≈Thickness (SWG) | Wt. per Ft. (KG)    | Wt. per Mtr. (KG)    | Wt. per Coil (KG)    | Max Working Pressure (MPa) | Bursting Pressure (MPa) | Coils Per Box    |
| 1/4"                                                                                   | 6.35        | 0.61           | 23               | 0.031               | 0.099                | 1.500                | 14.22                      | 42.66                   | 12               |
| 3/8"                                                                                   | 9.53        | 0.66           | 23               | 0.051               | 0.165                | 2.500                | 10.02                      | 30.06                   | 9                |
| 1/2"                                                                                   | 12.70       | 0.68           | 22               | 0.071               | 0.230                | 3.500                | 7.65                       | 22.94                   | 7                |
| 5/8"                                                                                   | 15.88       | 0.69           | 22               | 0.090               | 0.295                | 4.500                | 6.15                       | 18.46                   | 5                |
| 3/4"                                                                                   | 19.05       | 0.71           | 22               | 0.112               | 0.366                | 5.600                | 5.25                       | 15.75                   | 4                |
| 3/4"                                                                                   | 19.05       | 0.80           | 21               | 0.126               | 0.411                | 6.250                | 5.94                       | 17.82                   | 4                |

PARASMANI COPPER TUBES – GENERAL WEIGHT CHART | WEIGHT (KG/MTR)

| Ø Size | Thickness | 1.63 mm  | 1.21 mm  | 1.00 mm  | 0.90 mm  | 0.80 mm  |
|--------|-----------|----------|----------|----------|----------|----------|
|        |           | ~ 16 SWG | ~ 18 SWG | ~ 19 SWG | ~ 20 SWG | ~ 21 SWG |
| 1/4"   | 6.35 mm   | 0.217    | 0.175    | 0.151    | 0.138    | 0.125    |
| 3/8"   | 9.53 mm   | 0.362    | 0.283    | 0.240    | 0.219    | 0.197    |
| 1/2"   | 12.70 mm  | 0.507    | 0.391    | 0.329    | 0.299    | 0.268    |
| 5/8"   | 15.88 mm  | 0.653    | 0.499    | 0.418    | 0.379    | 0.339    |
| 3/4"   | 19.05 mm  | 0.798    | 0.607    | 0.507    | 0.459    | 0.411    |
| 7/8"   | 22.23 mm  | 0.944    | 0.715    | 0.597    | 0.540    | 0.482    |
| 1"     | 25.40 mm  | 1.089    | 0.823    | 0.686    | 0.620    | 0.553    |
| 1 1/8" | 28.58 mm  | 1.234    | 0.931    | 0.775    | 0.700    | 0.625    |
| 1 1/4" | 31.75 mm  | 1.379    | 1.038    | 0.864    | 0.780    | -        |
| 1 3/8" | 34.93 mm  | 1.525    | 1.146    | 0.953    | 0.861    | -        |
| 1 1/2" | 38.10 mm  | 1.670    | 1.254    | 1.042    | 0.941    | -        |
| 1 5/8" | 41.28 mm  | 1.816    | 1.362    | 1.132    | 1.021    | -        |
| 1 3/4" | 44.45 mm  | 1.961    | 1.470    | 1.221    | 1.101    | -        |
| 2 1/8" | 53.98 mm  | 2.397    | 1.794    | 1.488    | 1.342    | -        |

PARASMANI COPPER TUBES – GENERAL WEIGHT CHART | WEIGHT (KG/FT)

| Ø Size | Thickness | 1.63 mm  | 1.21 mm  | 1.00 mm  | 0.90 mm  | 0.80 mm  |
|--------|-----------|----------|----------|----------|----------|----------|
|        |           | ~ 16 SWG | ~ 18 SWG | ~ 19 SWG | ~ 20 SWG | ~ 21 SWG |
| 1/4"   | 6.35 mm   | 0.067    | 0.054    | 0.047    | 0.043    | 0.039    |
| 3/8"   | 9.53 mm   | 0.111    | 0.087    | 0.074    | 0.067    | 0.061    |
| 1/2"   | 12.70 mm  | 0.155    | 0.120    | 0.101    | 0.092    | 0.082    |
| 5/8"   | 15.88 mm  | 0.200    | 0.153    | 0.128    | 0.116    | 0.104    |
| 3/4"   | 19.05 mm  | 0.244    | 0.186    | 0.155    | 0.140    | 0.126    |
| 7/8"   | 22.23 mm  | 0.288    | 0.218    | 0.182    | 0.165    | 0.147    |
| 1"     | 25.40 mm  | 0.332    | 0.251    | 0.210    | 0.189    | 0.169    |
| 1 1/8" | 28.58 mm  | 0.377    | 0.284    | 0.237    | 0.214    | 0.191    |
| 1 1/4" | 31.75 mm  | 0.421    | 0.317    | 0.264    | 0.238    | -        |
| 1 3/8" | 34.93 mm  | 0.465    | 0.350    | 0.291    | 0.263    | -        |
| 1 1/2" | 38.10 mm  | 0.509    | 0.383    | 0.318    | 0.287    | -        |
| 1 5/8" | 41.28 mm  | 0.554    | 0.416    | 0.346    | 0.312    | -        |
| 1 3/4" | 44.45 mm  | 0.598    | 0.449    | 0.373    | 0.336    | -        |
| 2 1/8" | 53.98 mm  | 0.731    | 0.547    | 0.454    | 0.410    | -        |

## Contact Us

Enquire today for bulk orders and technical specifications.

[www.parasmanicopper.com](http://www.parasmanicopper.com)



+91 98191 34044 / +91 81698 08254



[sales@parasmanitubes.com](mailto:sales@parasmanitubes.com)



Factory : 6/1 , Mahavir Industries , GIDC Umbergaon,  
Umbergaon Dist Valsad, Gujarat – 396171

# Brands We've Served



Disclaimer: Our products have been supplied directly or indirectly for projects or applications associated with the above brands, through our company or our vendors and channel partners.

## Authorised Distributors Of



+91 98191 34044 / +91 81698 08254

[sales@parasmanitubes.com](mailto:sales@parasmanitubes.com)

Factory : 6/1, Mahavir Industries, GIDC Umbergaon,  
Umbergaon Dist Valsad, Gujarat – 396171

