



PARASMANI

tubes you can rely on

Pure Water. From Main to Tap.

**PLUMBING & WATER SUPPLY COPPER TUBES
FOR HOT & COLD WATER**

- ✓ Safe for Potable Water
- ✓ Naturally Bacteriostatic



Copper Tubes
by Parasmani





Parasmani


is a leading manufacturer of high-quality copper tubes, serving medical gas, HVAC, refrigeration, plumbing, fuel gas and industrial applications across India. With an annual production capacity exceeding 3,600 MT, Parasmani is recognised for consistent quality and technical precision—supplying residential, commercial and institutional plumbing projects through a strong Pan-India network and strategic stock points.

Parasmani manufactures copper tubes for hot and cold water distribution in homes, hotels, hospitals and institutions. Safe for drinking water, bacteriostatic by nature, and built to last the life of the building — copper is the pipe every serious plumbing standard was written around.

Manufactured in compliance with: BS EN 1057

Why Copper for Water

Water piping is a health choice before it is a specification choice. What runs through the pipe reaches every occupant of the building every day for decades. Copper is one of the few materials that naturally supports clean water delivery rather than merely tolerating it. Durable and corrosion-resistant, it delivers reliable performance over a long service life. Unlike plastic risers, copper does not become a replacement concern halfway through a building's lifespan, making it a dependable investment in water quality and long-term reliability.

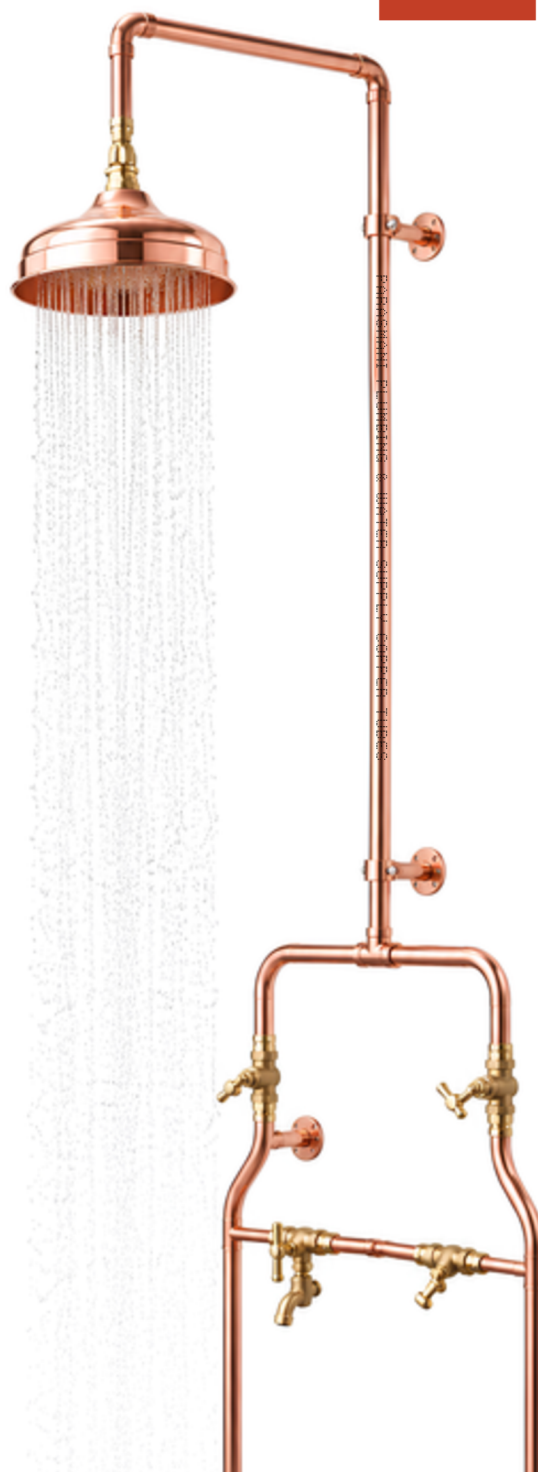

COPPER vs ALTERNATIVES

Property	Copper	CPVC	GI Steel	PPR / uPVC
Potable safety	Inherently safe	Acceptable	Rust risk	Varies
Bacteria	Bacteriostatic	Biofilm risk	Biofilm risk	Biofilm risk
Max. Temp @ Full Pressure	200°C+	~60°C	200°C+	~45°C
Service life	50+ years	25–30 yrs	10–20 yrs	20–25 yrs



Pure at the Core

Manufactured from C12200 DHP (phosphorus-deoxidized copper) at 99.90% purity. Consistent wall thickness and high thermal conductivity ensure reliable pressure and heat-transfer performance in hot and cold water systems.

Material Grade	C12200 (DHP) / CW024A
Copper Content	Cu 99.90% minimum (including silver)
Phosphorus (deoxidizer)	0.015–0.040%

Product	O.D. Range	W.T. Range	Temper	Length
Straight Copper Tubes	6 mm – 130 mm	0.70 mm – 3.25 mm	H / HH / QH	3 m
Pancake Copper Coils	4.76 mm – 22.23 mm	0.40 mm – 1.20 mm	Soft Annealed	15.24 m
Copper Fittings	6 mm – 108 mm	0.60 mm – 2.50 mm	Wrought type	-

Parasmani — Typical Plumbing Sizes

Hard straight tubes are used for risers, floor mains and branch distribution, while soft annealed pancake coils are ideal for long jointless runs, concealed piping and tight-radius bends.

PARASMANI STRAIGHT COPPER TUBES STANDARD LENGTH 3 MTR			
O.D. (mm)	W.T. (mm)	Weight/Mtr (kg)	Typical Use
12	0.8	0.252	Basin, WC branch, single point
15	1.0	0.394	Domestic hot & cold branch
22	1.0	0.590	Flat distribution, small riser
28	1.2	0.903	Building riser, floor mains
35	1.2	1.140	Main riser, commercial building
54	1.5	2.212	Building entry, hotel / hospital mains

The sizes shown are typical recommendations only. Final tube selection should be verified by a qualified plumbing engineer in accordance with project requirements and local plumbing codes.



Copper Fittings

Copper plumbing fittings are end-feed type, manufactured from the same grade of copper as the tube and in accordance with BS EN 1254-1. Designed for potable water, hot and cold water systems, they provide durable, leak-tight joints and are supplied to ensure reliable installation and long service life.

PARASMANI COPPER FITTINGS | PRODUCT RANGE & SPECIFICATIONS | BS EN 1254-1

Fitting Type	Size Range – O.D. (mm)	≈ Size Range (inches)	Wall Thickness (mm)	≈ Wall Thickness (SWG)
90° Elbow C × C	6 mm – 108 mm	3/16" – 4"	0.6 mm – 2.5 mm	24 SWG – 12 SWG
Coupling C × C	6 mm – 108 mm	3/16" – 4"	0.6 mm – 2.5 mm	24 SWG – 12 SWG
Reducing Coupling C × C	8 × 6 mm – 108 × 76 mm	1/4" × 3/16" – 4" × 3"	0.6 mm – 2.5 mm	24 SWG – 12 SWG
Equal Tee C × C × C	6 mm – 108 mm	3/16" – 4"	0.6 mm – 2.5 mm	24 SWG – 12 SWG
Reducing Tee C × C × C	8 × 6 mm – 108 × 76 mm	1/4" × 3/16" – 4" × 3"	0.6 mm – 2.5 mm	24 SWG – 12 SWG

For detailed installation guidelines, best practices and joining procedures, please visit our website or scan the QR code.



Contact Us

Get in touch today for pricing, technical specifications, and project enquiries.



+91 98191 34044 / +91 81698 08254



Factory: 5/2, GIDC, Umbergaon,
Valsad, Gujarat – 396171



sales@parasmanicopper.com



Parasmani

www.parasmanicopper.com