



PARASMANI

tubes you can rely on

Product Catalog

2026




Copper Tubes
by Parasmani



About Parasmani

Parasmani Tubes Copper Pvt. Ltd. is a leading manufacturer of seamless copper tubes and fittings, operating from GIDC Umbergaon, Gujarat with a sales office in Mumbai. With an annual production capacity exceeding 3,600 MT, we serve HVAC/R, medical, plumbing, fuel gas, and industrial markets across India and internationally. Our manufacturing is backed by ISO 9001:2015 certification, BIS mark, 100% eddy current testing, and mill test certificates available on every batch.

Our Brands



PARASMANI

Multiple Applications

Parasmani is our flagship brand covering the full spectrum of copper tube applications.



PTP K-SERIES

HVAC/R Specialized

PTP K-Series is our dedicated HVAC line for VRF and non-VRF refrigerant applications.



Straight Copper Tubes

Seamless straight copper tubes for HVAC/R, medical gas, plumbing, fuel gas, and industrial applications. Manufactured from C12200 DHP copper cathodes, 100% eddy current tested, available in both Parasmani and PTP K-Series brands.



Temper	Hard, Half Hard, Quarter Hard
Size Range (Outer Diameter)	6 mm to 130 mm
Wall Thickness	0.7 mm to 3.25 mm
Length	Up to 6000 mm
Applications	HVAC/R, Medical Gas, Plumbing, Industrial, Fuel Gas
Brands	Parasmani and PTP K-Series

OD × Thickness Matrix

○ = Available in this combination

OD (mm)	2.00 mm (14 SWG)	1.63 mm (16 SWG)	1.21 mm (18 SWG)	1.00 mm (19 SWG)	0.90 mm (20 SWG)	0.80 mm (21 SWG)
6 – 12 mm		○	○	○	○	○
12 – 19 mm		○	○	○	○	○
19 – 28 mm		○	○	○	○	○
28 – 35 mm	○	○	○	○	○	○
35 – 55 mm	○	○	○	○	○	
55 – 80 mm	○	○				
86 – 102 mm	○	○				
102 – 130 mm	○	○				

For custom sizes contact our sales team

Packaging

Every bundle leaves Parasmani's factory protected – ends sealed, surface guarded, clearly labelled. What you receive is exactly as it was made.



Plastic End Caps

Both ends sealed to prevent contamination and moisture ingress during transit and storage.



Dual Hologram Authentication

Each pipe carries two holograms for brand authentication — eliminating counterfeit risk on site.



Full Traceability Label

Every bundle labelled with brand name, size, batch number, and complete pipe specifications matching the ink stamp on every length.



Four-Layer Protective Wrap

Inner polythene wrap protective cardboard layer thick white plastic covering outer polythene wrap. Surface arrives exactly as it left the factory.

Standards

ASTM B280 Air Conditioning & Refrigeration	JIS H 3300 Copper & Alloy Seamless Tubes
EN 1057 Plumbing, Heating & Gas Systems	ASTM B819 Plumbing, Heating & Gas Systems
IS 10773 ACR Copper Tubes	ASTM B68 Bright Annealed Copper Tubes
EN 12735 HVAC/R	EN 13348 Medical Gases & Vacuum

Pancake Copper Coil

Soft annealed seamless copper coils for split AC, VRF/VRV systems, refrigeration, and cold storage. Manufactured from C12200 DHP, fully annealed for field bending, sealed at both ends, available in Parasmani and PTP K-Series brands



Temper	Soft Annealed
Size Range (Outer Diameter)	4.76 mm to 22.23 mm
Wall Thickness	0.4 mm to 1.2 mm
Length	3000 mm to 16000 mm
Applications	HVAC/R, Plumbing, Industrial
Brands	Parasmani and PTP K-Series


Size Guide & Packaging

OD (inches)	OD (mm)	Standard Wall	Standard Coil Length	Coils / Box
1/4"	6.35 mm	0.40 mm – 1.21 mm	15.24 m	12
5/16"	7.94mm	0.50 mm – 0.60 mm	15.24 m	10
3/8"	9.53 mm	0.50 mm – 1.21 mm	15.24 m	9
1/2"	12.70 mm	0.56 mm to 1.21 mm	15.24 m	7
5/8"	15.88 mm	0.60mm to 1.21 mm	15.24 m	5
3/4"	19.05 mm	0.71 mm – 1.21 mm	15.24 m	4
7/8"	22.23 mm	0.80 mm – 1.21 mm	15.24 m	3

For custom sizes contact our sales team


Packaging

Every box leaves Parasmani's factory protected – ends sealed, surface guarded, clearly labelled. What you receive is exactly as it was made.

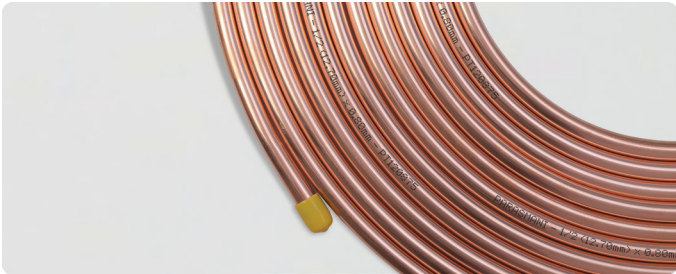

Plastic End Caps

Both ends sealed to prevent contamination and moisture ingress during transit and storage.

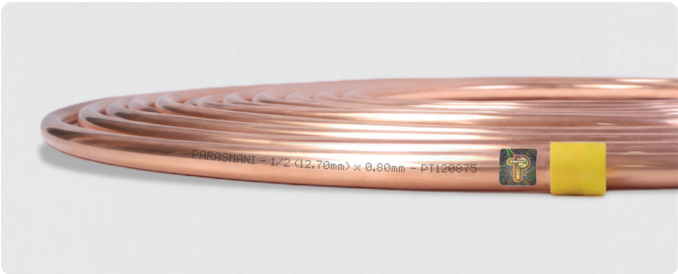

Dual Hologram Authentication

Each coil carries two holograms and is clearly marked with brand name, size, and batch number for full on-site verification.



Four-Layer Protective Wrap

Inner polythene wrap – heavy duty corrugated box – outer polythene wrap for moisture protection. Coil arrives surface-clean every time.



Full Traceability Label

Every box labelled with complete pipe specifications for traceability – OD, wall, length, standard, and batch code.

Standards

ASTM B280 Air Conditioning & Refrigeration	JIS H 3300 Copper & Alloy Seamless Tubes
EN 1057 Plumbing, Heating & Gas Systems	EN 12449 General Engineering Tubes
IS 10773 ACR Copper Tubes	ASTM B68 Bright Annealed Copper Tubes
EN 12735 HVAC/R	

Copper Fittings

Wrought copper pressure fittings manufactured from C12200 DHP at 99.9% purity. Denser grain structure than cast alternatives — superior pressure rating, leak resistance, and longevity in brazed joints. Dimensionally matched to Parasmani and PTP K-Series tubes for guaranteed slip-fit.



Types	Elbow, 45° Elbow, Long Elbow, Coupling, Reducer, Tee, U Bend, End Cap and more
Size Range (Inner Diameter)	6 mm to 130 mm
Wall Thickness	0.7 mm to 2.0 mm
Applications	HVAC/R, Medical Gas, Plumbing, Industrial, Fuel Gas
Brands	Parasmani and PTP K-Series

Parasmani Copper Fittings — Product Range & Specifications| ASME B16.22

Fittings Type	Size Range (Inches)	Wall Thickness	Wall (SWG)
90° Elbow C x C	1/4" – 5-1/8"	0.71 mm – 3.25 mm	22 SWG – 10 SWG
45° Elbow C x C	1/4" – 5-1/8"	0.71 mm – 3.25 mm	22 SWG – 10 SWG
Coupling C x C	1/4" – 5-1/8"	0.71 mm – 3.25 mm	22 SWG – 10 SWG
Reducing Coupling C x C	3/8" x 1/4" – 5-1/8" x 4-1/8"	0.71 mm – 3.25 mm	22 SWG – 10 SWG
Equal Tee C x C x C	1/4" – 5-1/8"	0.71 mm – 3.25 mm	22 SWG – 10 SWG
Reducing Tee C x C x C	3/8" x 1/4" – 5-1/8" x 4-1/8"	0.71 mm – 3.25 mm	22 SWG – 10 SWG
Return Bend C x C	1/4" – 5-1/8"	0.71 mm – 3.25 mm	22 SWG – 10 SWG

For custom sizes/fittings contact our sales team

Fittings Type	Size Range (OD) mm	Size Range (Inches)	Wall Thickness
90° Elbow C x C	6mm – 108 mm OD	3/16" – 4"	0.6 mm – 2.5 mm
Coupling C x C	6mm – 108 mm OD	3/16" – 4"	0.6 mm – 2.5 mm
Reducing Coupling C x C	8 x 6 mm – 108 x 76 mm OD	1/4" x 3/16" – 4"x 3"	0.6 mm – 2.5 mm
Equal Tee C x C x C	6mm – 108 mm OD	3/16" – 4"	0.6 mm – 2.5 mm
Reducing Tee C x C x C	8 x 6 mm – 108 x 76 mm OD	1/4" x 3/16" – 4"x 3"	0.6 mm – 2.5 mm

Packaging



Individual Plastic Packaging

Each fitting type is sealed in its own plastic bag — keeping the surface clean and oxide-free from factory to



Specification Label on Every Pack

Each plastic bag carries a printed label with fitting type, size, alloy grade, and applicable standard — so every piece is



Corrugated Box Packing

Individually packed fittings are grouped by size and type into labelled corrugated boxes — easy to sort, count, and store on site with no mix-ups.

Standards

ASME B16.22 Wrought Fittings — HVAC, Plumbing & Medical Gas	EN 1254-1 Copper Capillary Solder Fittings
EN 1057 Plumbing, Heating & Gas Systems	

Quality & Specifications

Parasmani manufactures a comprehensive range of copper tubes and fittings designed for use in air conditioning, refrigeration, and related HVAC applications.

01

Chemical Composition Analysis

Verification of copper purity and phosphorus content to ensure compliance with specified material standards.

02

Hydrostatic Pressure Test (IS 10773:1995)

Each tube is subjected to hydraulic pressure to ensure strength and leak-proof performance.

03

Eddy Current Test (IS 11612:1984)

Non-destructive testing to detect surface and subsurface defects throughout the tube length.

04

Freedom from Defects Inspection (IS 10773:1995)

Visual and dimensional inspection to ensure tubes are free from cracks, laminations, and surface imperfections.

05

Pneumatic Pressure Test (IS 10773:1995)

Air pressure testing to reconfirm leak-proof integrity

06

Drift Expanding Test (IS 10773:1995)

Ensures proper ductility and suitability for flaring and expansion during installation.

07

Flattening Test (IS 10773:1995)

Verifies structural soundness and resistance to cracking under deformation.

08

Hydrogen Embrittlement Test (IS 10773:1995)

Confirms resistance to hydrogen attack, ensuring long-term durability in HVAC/R applications.

09

Residual and Cleanliness Test (IS 10773:1995)

Tubes are internally cleaned and tested to ensure residual contamination does not exceed 0.038 g/m², ensuring optimal refrigeration performance.

Chemical and Mechanical Properties

Standard	Copper Alloy No./Grade	Chemical Composition		Mechanical Properties					
Specification		Cu%	P%	Temper	Tensile Strength (MPa)	Elongation % (Min)	Average Grain Size (mm)	Hardness	Internal Bore Cleanliness
JIS H3300	C12200	99.90% Min.	0.015 – 0.040%	Soft Annealed (O)	205 Min.	40	0.025 – 0.060	60 VPN Max	NA
				Half Hard	245 – 325	NA	NA	70 – 110 VPN	NA
				Hard	315 Min.	NA	NA	100 VPN Min	NA
ASTM B68	C12200	99.90% Min.	0.015 – 0.040%	Soft Annealed (O60)	210 Min.	40	0.040 Min.	NA	NA
ASTM B280	C12200	99.90% Min.	0.015 – 0.040%	Soft Annealed (O60)	205 Min.	40	0.040 Min.	NA	0.038 g/m ² Max.
				Hard (H58)	250 Min.	NA	NA	NA	-
ASTM B75	C12200	99.90% Min.	0.015 – 0.040%	Half Hard (H55)	250 – 325	NA	NA	30 – 60 (HR 30T)	NA
				Hard (H80)	310 Min.	NA	NA	55 Min. (HR 30T)	NA
IS 10773 : 2025	Cu-DHP	99.90% Min. (Cu + Ag%)	0.015 – 0.040%	Soft Annealed	210 Min.	40	0.040 Min.	NA	0.038 g/m ² Max.
				Hard Drawn	290 Min.	NA	NA	NA	0.038 g/m ² Max.

Brands We've Served



Disclaimer: Our products have been supplied directly or indirectly for projects or applications associated with the above brands, through our company or our vendors and channel partners.



PARASMANI

tubes you can rely on

Complete HVAC Solutions

K-Flex | Gurutronics Automations Pvt Ltd | ACtive



K-FLEX



GURUTRONICS
AUTOMATIONS PVT LTD



Alongside our copper tubes, we offer complementary HVAC products—insulation, condensate drain pumps, and control panels giving contractors and installers a single, reliable source and simplifying procurement.



Contact Us

Enquire today for bulk orders and technical specifications.



+91 98191 34044 / +91 81698 08254



5/2, GIDC Umbergaon, Umbergaon Dist.
Valsad, Gujarat – 396171, INDIA



sales@parasmanicopper.com



Parasmani · PTP K-Series
www.parasmanicopper.com