

Desk lighthouse: how the finished thing looks (Rev D: the open wire frame, on a cell)

Four brass rods from a brass coaster to a brass roof, a turning spine up the middle, the motor and the cell standing in the open at the foot, an open lantern on top: no glass, no house. 243 mm tall, Ø75 at the base, about 217 g before the ba


Front view

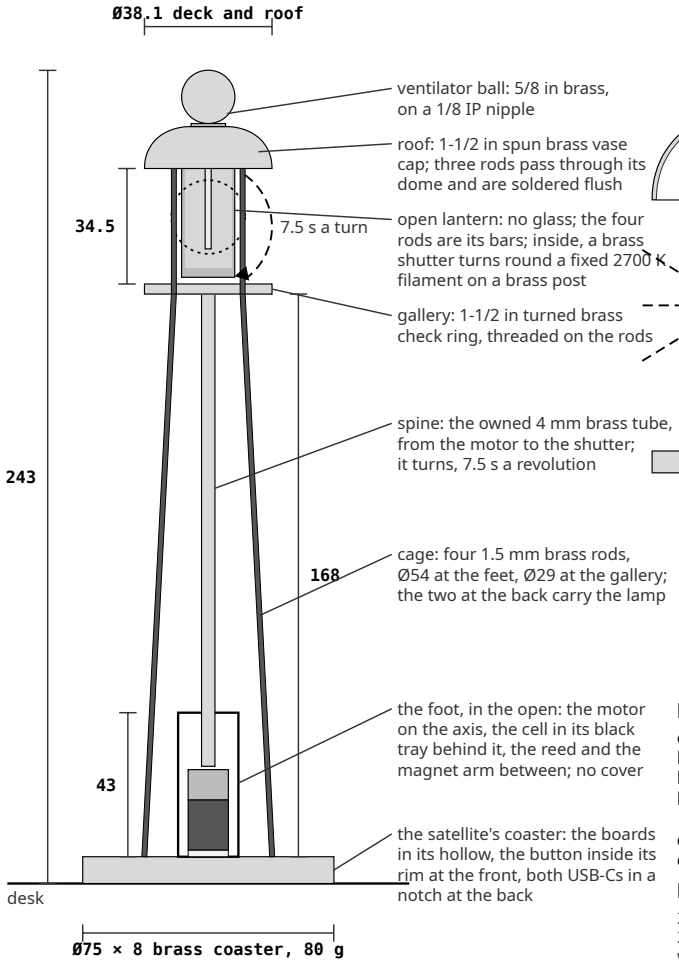


Lantern section, front on the left; the two front rods are cut away

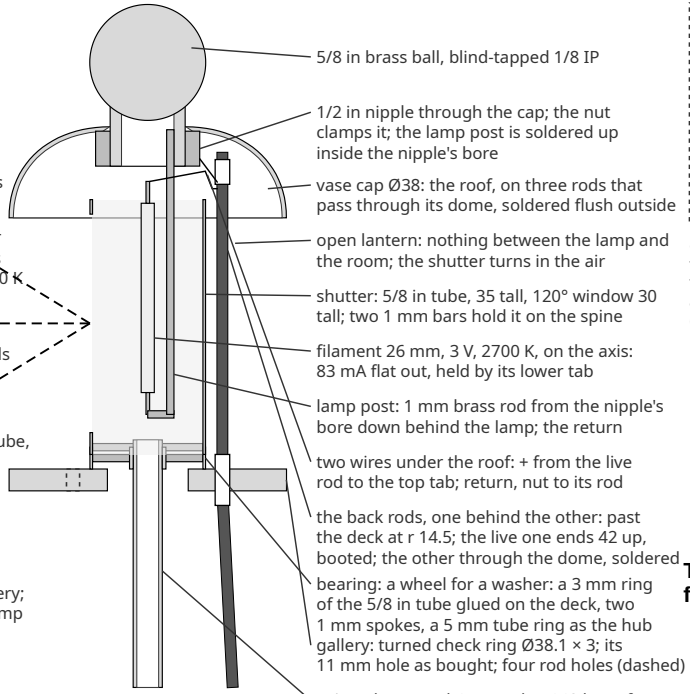

Plan, roof off




The foot, looking down



no house: motor, tray, reed and arm on the bare brass
the live rod, back-left, ringed white: its sleeve
notch 40 wide in the rim at the back: charge and flash
the button in the rim at the front: the black mark
turns 8 rpm: 7.5 s a revolution

The foot and the coaster, cut front on the left

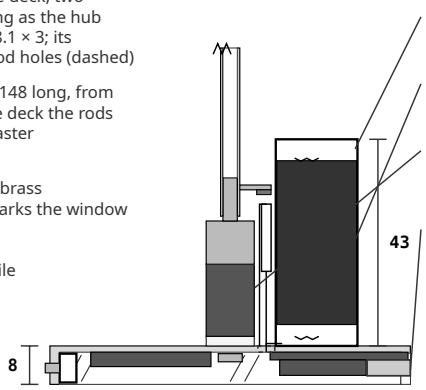

How it behaves

off	lamp dark, shutter closed (brass to you), boost asleep
lamp	shutter parked open to you, filament 70 % (58 mA)
beacon	the shutter turns, 7.5 s a revolution: a 2.5 s sweep, then brass in the rim at the front. Short press: rotation on/off (off parks the window on you); long: lamp off, low, full (off closes the shutter)
cell	about 7 h of beacon, 8 of lamp; low: dim, park, sleep
charge	USB-C at the back, 2.3 h; it runs from the cable meanwhile

Key numbers

243 tall · Ø75 base · cage Ø54 → Ø29 over 168 · lantern open 34.5
217 g, centre of mass 81 up, tips at 25° (0.3 N at the ball);
with 80 g of steel in the coaster: 60 up, 32° (0.5 N)
from the cell: 129 mA beacon (7 h), 112 lamp (8 h), 20 asleep
rail 70 mA typical, 119 peak · lamp 83 mA (249 mW) · charge 500 mA
cuts: rods 4 × 223 · spine 148 · shutter 35 · post 42 · 1 mm rod 64 · two 3 mm rings

Rev D, drawn 2026-11-09 evening for approval, not built. The check ring's thickness, the vase cap's height and the coaster's hollow are assumed: measure them and rerun the script. Sources: the listings and the pages named in the record.