
Pin to pin, with the two rails: parts placed as in the device, every line one piece of rod or wire

Rails are bare rods between A1 and the amp. A dot is a joint; a hop is a line passing over a rail without touching it.

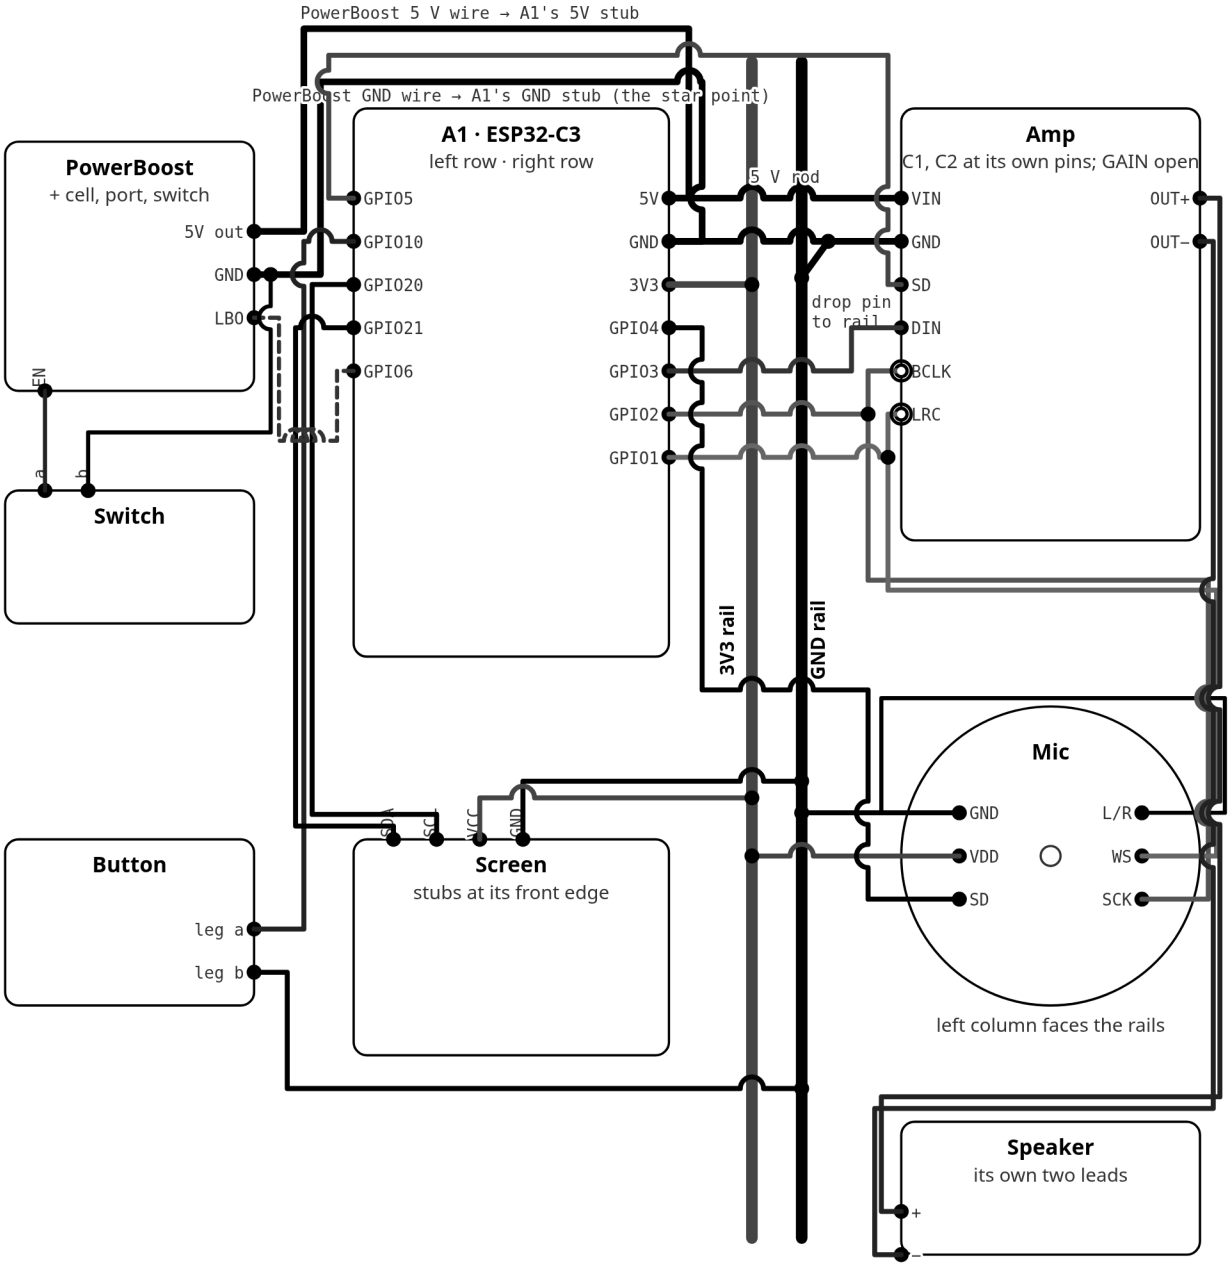


R1 4.7 kΩ: amp SD → amp GND · R3 10 kΩ: BCLK rod → 3V3 rail (until A1's own pull-up is confirmed) · GAIN open · mic SD pull-down in firmware

Dots are joints; rings are taps where a rod carries on; every crossing is drawn as a hop, so no two lines ever meet without a dot.

Pip as rails and lanes · rails on the left, one lane per signal on the right, parts stacked between

A dot is a joint. A ring is a tap where the line carries on. A hop is a line passing over another without touching. Place the parts anywhere; k

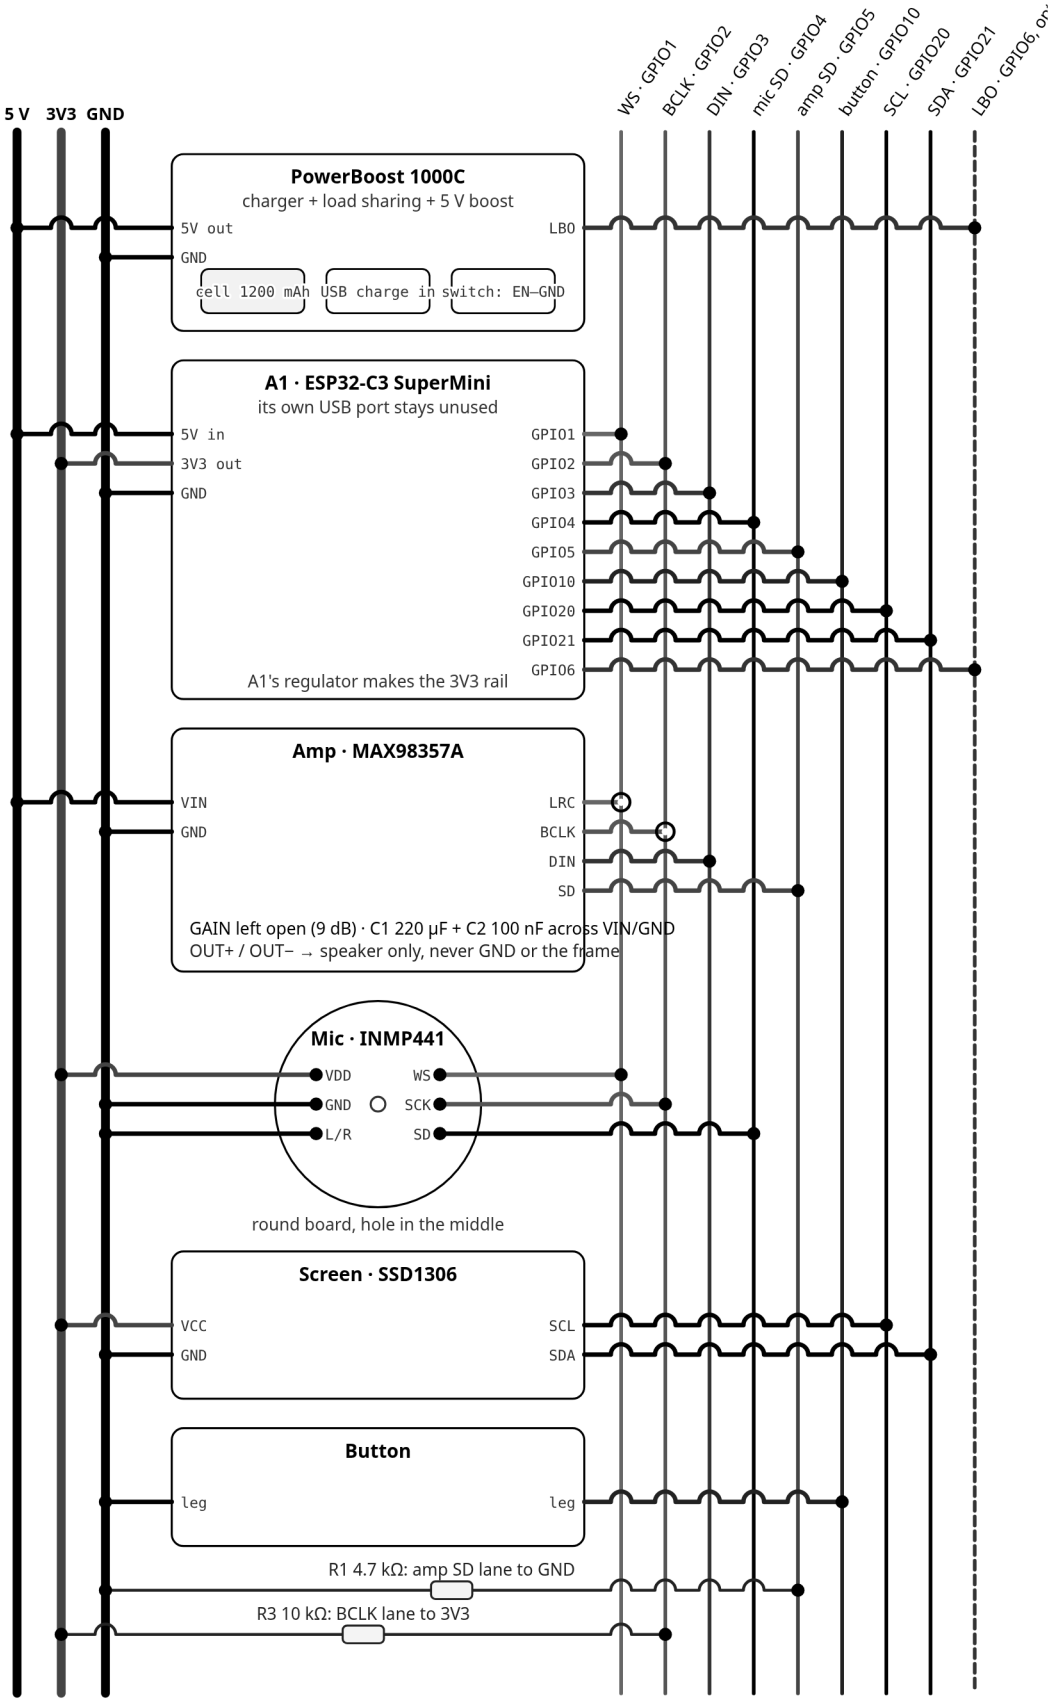

The same device as rails and lanes · place parts anywhere, keep the joints