



Application Development Internship

Project Report on

OuroMini: Wireless Security Testing Platform

Submitted by

K. Pardhu	2311CS040089
K. Karthik	2311CS040080
K. Tejaswini	2311CS040077
B. Harshitha	2311CS040022

B. Tech III Year I Semester

**Under the Guidance of
Dr. G. Latha (Associate Professor)**

**Department of CSE (Cyber Security)
Malla Reddy University, Hyderabad**

November 2025



MALLA REDDY UNIVERSITY

(Telangana State Private Universities Act No.13 of 2020 and G.O.Ms.No.14, Higher Education (UE) Department)

CERTIFICATE

This is to certify that, the Application Development Internship Project entitled “OUROMINI - ESP32-WROOM-32 BASED WIRELESS SECURITY TESTING AND MONITORING PLATFORM”, has been successfully completed and submitted by K. Pardhu (2311CS040089), K. Karthik (2311CS040080), K. Tejaswini (2311CS040077), B. Harshitha (2311CS040022) B.Tech III year I semester, Department of CSE (CS) during November 2025. The results embodied in this report have not been submitted earlier to any other university or institute for any other internship or the award of any degree or diploma.

Internal Guide

Dr. G. Latha

(Associate Professor)

Dean CS, IoT & ECE

Dr. G. Anand Kumar

(Professor)

External Examiner

ACKNOWLEDGEMENTS

We extend our sincere gratitude to all those who have contributed to the completion of this project report. Firstly, we would like to extend our gratitude to **Dr. V. S. K Reddy, Vice-Chancellor**, for his visionary leadership and unwavering commitment to academic excellence.

We would also like to express our deepest gratitude to our project guide **Dr. G. Latha Associate Professor, Dept. of Cyber Security & IoT**, whose invaluable guidance, insightful feedback, and unwavering support have been instrumental throughout this project for successful outcomes.

We are also grateful to **Dr. G. Anand Kumar, Dean, Cyber Security & IoT Dept.**, for initiating and providing us with the necessary resources and facilities to carry out this project.

We extend our gratitude to our **AD – PRC Convener & Coordinator, Dr. G. Latha**, for giving valuable inputs and timely guidelines to improve the quality of our project through a critical review process.

We are deeply indebted to all of them for their support, encouragement, and guidance, without which this project would not have been possible.

K. PARDHU VARMA	2311CS040089
K. KARTHIK	2311CS040080
K. TEJASWINI	2311CS040077
B. HARSHITHA	2311CS040022

ABSTRACT

The modern digital ecosystem is increasingly dependent on wireless communication technologies, which form the backbone of contemporary networking infrastructures. As connectivity grows ubiquitous through Wi-Fi, Bluetooth, and emerging IoT protocols, so too do the associated cybersecurity risks. The continuous proliferation of wireless devices has opened new vectors for unauthorized access, data interception, and signal manipulation. Despite the critical need for robust wireless security assessment, existing solutions remain fragmented, complex, and prohibitively expensive for widespread academic and research adoption. Tools like software-defined radios or professional network analyzers require high computational resources and domain expertise, creating a technological divide between theoretical cybersecurity education and practical implementation.

To bridge this gap, OuroMini has been conceived as an embedded, low-cost, and multifunctional wireless security testing and monitoring platform based on the ESP32-WROOM-32 microcontroller. This compact yet powerful system unifies multiple wireless testing functionalities within a single board, providing capabilities such as access point (AP) scanning, probe and PMKID sniffing, client mapping, and channel-based spectrum activity analysis. By leveraging the dual-core architecture and built-in Wi-Fi capabilities of ESP32, OuroMini enables real-time packet monitoring, metadata extraction, and analysis without reliance on external hardware or display modules. The device interacts with users through a serial command interface, making it fully compatible with cross-platform environments and minimal host resources.

The project emphasizes modular firmware design, allowing seamless integration of additional wireless functionalities such as BLE and RFID in future revisions. Each functional module—ranging from the initialization and Wi-Fi scan modules to the probe and PMKID sniffers—operates as an independent logical component within a FreeRTOS-based firmware ecosystem. The result is a system that efficiently balances performance, power consumption, and real-time responsiveness.

From an educational and research standpoint, OuroMini represents a pivotal step toward democratizing cybersecurity experimentation. Its open-source nature, combined with portability and low production cost, makes it suitable for classroom demonstrations, security workshops, and professional penetration testing toolkits alike. Furthermore, its serial data format can be extended to generate visual analytics, heat maps, and pictographic representations of network behavior for deeper insight.

Ultimately, OuroMini serves as a bridge between embedded system engineering and cybersecurity research. It redefines how wireless security testing tools can be designed—compact, affordable, and extensible—while remaining fully aligned with ethical and educational objectives. By consolidating scanning, sniffing, and analysis within a single embedded device, it empowers users to understand, visualize, and strengthen wireless security ecosystems in real time.

TABLE OF CONTENTS

S.NO	Contents	Page no
1	Introduction	8 - 9
	1.1 Problem Definition & Description	8
	1.2 Objective of the Project	8
	1.3 Scope of the Project	9
2	System Analysis	10 - 17
	2.1.1 Background & Literature Survey	10 -11
	2.1.2 Limitations of Existing System	11 - 12
	2.2 Proposed System	12 - 13
	2.2.1 Advantages of Proposed System	13 - 14
	2.3 Software & Hardware Requirements	14 - 15
	2.3.1 Software Requirements	14
	2.3.2 Hardware Requirements	15
	2.4 Feasibility Study	16 - 17
	2.4.1 Technical Feasibility	16
	2.4.2 Robustness & Reliability	16
	2.4.3 Economic Feasibility	17
3	Architectural Design	18 - 35
	3.1 Modules Design	18 - 25
	3.2 Method & Algorithm Design	26 - 29
	3.2.1 Method	26 - 27
	3.2.2 Algorithms	27 - 29
	3.3 Project Architecture	31 - 35

	3.3.1 Architecture	31
	3.3.2 Dataflow Diagram	32 - 33
	3.3.3 Class Diagram	34
	3.3.4 Use case Diagram	35
	3.3.5 Activity Diagram	35

1. INTRODUCTION

1.1 Problem Definition and Description

In the modern era of ubiquitous wireless communication, network infrastructures have become the lifelines of digital ecosystems. Wi-Fi, Bluetooth, and emerging IoT protocols enable seamless connectivity between devices, users, and services. However, this rapid technological advancement has simultaneously widened the landscape of security threats. Unauthorized access points, rogue devices, packet spoofing, and signal interception are now common vulnerabilities affecting both domestic and enterprise environments.

Traditional approaches to wireless auditing and cybersecurity analysis rely heavily on resource-intensive software and specialized hardware such as SDRs (Software Defined Radios), multiple network adapters, and complex PC-based configurations. These setups, although effective, are expensive, difficult to operate, and unsuitable for field demonstrations or embedded learning. As a result, cybersecurity education and research often face practical limitations when attempting to bridge theoretical understanding with real-world experimentation.

To overcome these challenges, the **OuroMini** project introduces a compact, portable, and low-cost wireless monitoring and analysis system built entirely on the **ESP32-WROOM-32** microcontroller. This embedded solution eliminates dependence on bulky external hardware and software layers, enabling users to scan wireless networks, sniff packets, and analyze network activity directly through a serial or terminal interface. The design emphasizes modular firmware that allows continuous operation in multiple modes—such as access-point scanning, beacon/probe sniffing, PMKID capture, and client mapping—while maintaining minimal power consumption. OuroMini serves as an innovative research platform for students, penetration testers, and educators, allowing hands-on exploration of wireless protocol behavior, network security mechanisms, and data-driven signal analytics.

1.2 Objective of the Project

The primary objective of OuroMini is to design and develop an **embedded wireless security testing and monitoring platform** that is cost-efficient, easily deployable, and educationally impactful. The specific goals include:

- **To integrate multiple wireless analysis functions**—including access-point discovery, signal strength measurement, PMKID sniffing, and packet monitoring—within a single ESP32-based module.
- **To eliminate dependence on high-end computing devices** by enabling standalone real-time analysis through serial communication.
- **To create an extensible and modular firmware structure** that can be expanded with additional protocols such as BLE, Sub-GHz, or TinyML-based anomaly detection.
- **To support cybersecurity education and training** by providing a hands-on, safe, and open-source tool for studying wireless vulnerabilities, authentication behaviors, and data flow patterns.
- **To promote affordability and accessibility** in wireless research by offering a solution that can be replicated by academic institutions, hobbyists, and professional testers alike.

Ultimately, OuroMini aims to democratize the process of wireless cybersecurity exploration—making advanced scanning, sniffing, and network behavior analysis tools available in a small, energy-efficient, and open-hardware format.

1.3 Scope of the Project

The scope of OuroMini encompasses the complete development of a **multi-functional, ESP32-based wireless testing system** that integrates both hardware and software layers in an optimized embedded framework. It extends across the following dimensions:

- **Educational Use:** As a hands-on platform for cybersecurity students to learn about Wi-Fi packet structures, AP/STA interactions, and wireless scanning logic without needing a PC-dependent setup.
- **Research Application:** Providing a testbed for lightweight intrusion detection, protocol behavior modeling, and wireless signal pattern visualization.
- **Field Operations:** Serving as a portable tool for professionals to perform on-site network reconnaissance, audit wireless strength, or detect unauthorized access points.
- **Extension and Customization:** Its modular architecture allows integration of complementary functions such as BLE sniffing, NFC exploration, or signal triangulation in future firmware updates.

Unlike traditional analyzers, OuroMini has **no display dependency**, relying instead on **serial or web terminal visualization**. This design ensures flexibility, minimal power draw, and universal compatibility across operating systems. The simplicity of deployment and open-source firmware makes OuroMini an adaptable foundation for classroom instruction, ethical hacking workshops, or rapid-prototyping scenarios.

2. SYSTEM ANALYSIS

2.1 Existing System

2.1.1 Background & Literature Survey

Before the development of compact, embedded wireless monitoring systems like **OuroMini**, most network reconnaissance and security analysis tools were limited to computer-based environments requiring dedicated adapters and complex setup procedures. Traditional Wi-Fi auditing systems—such as **Aircrack-ng**, **Wireshark**, or **Kismet**—though powerful, depend on high-performance processors, multiple wireless chipsets in monitor mode, and Linux-based configurations. These requirements make them impractical for lightweight field deployment or real-time embedded experimentation. Moreover, such setups often consume high power, rely on external storage, and lack the immediacy and portability demanded by researchers or students engaging in practical cybersecurity testing.

Over the years, significant advancements have been made in the domain of **wireless network security** and **embedded IoT systems**. Researchers have explored methods for passive Wi-Fi scanning, packet sniffing, and device fingerprinting using general-purpose microcontrollers and single-board computers such as the **Raspberry Pi**, **ESP8266**, and **ESP32**. Projects like the *ESP8266 Deauther* and *ESP32 Marauder* introduced low-cost methods for packet analysis, network scanning, and basic attack simulation. These systems demonstrated the feasibility of embedding wireless monitoring capabilities into microcontrollers, drastically reducing cost and increasing accessibility. However, many of these early systems suffered from fragmented firmware architectures, lack of modular scalability, and inconsistent performance across network environments.

Academic literature on IoT and cybersecurity education has emphasized the need for **portable, affordable, and safe-to-use wireless research platforms** that can be integrated into teaching laboratories without regulatory risk. Studies from IEEE and ACM highlight that introducing network reconnaissance concepts through embedded tools fosters deeper understanding of real-world attack surfaces and defense mechanisms. Despite this, most commercially available devices remain either too expensive or too restricted for open experimentation.

In parallel, the growing reliance on **Wi-Fi-enabled IoT devices** has exposed new vulnerabilities in everyday environments. Research in wireless security testing underscores the necessity of compact field analyzers that can detect rogue access points, analyze channel occupancy, and monitor packet flow anomalies. Yet, existing solutions are primarily software-bound or tethered to full operating systems, creating barriers for mobility and real-time response.

These limitations have collectively inspired the development of **OuroMini**, a self-contained, firmware-driven wireless monitoring and security analysis device. Built entirely on the **ESP32-WROOM-32**, OuroMini consolidates scanning, sniffing, and network interaction functions into a single embedded framework without requiring a PC or external adapter. By leveraging the dual-core capabilities of the ESP32 and its integrated Wi-Fi transceiver, OuroMini overcomes the limitations of traditional software-defined tools—delivering real-time network intelligence through a minimalistic and efficient command interface.

OuroMini thus represents a new generation of embedded cybersecurity systems that merge **academic utility, technical sophistication, and operational independence**. It bridges the gap between theoretical network security models and hands-on experimentation, providing a scalable foundation for future IoT-oriented intrusion detection, wireless analytics, and embedded AI-driven defense research.

2.1.2 Limitations of Existing System

Existing wireless monitoring and network analysis systems exhibit several key limitations that hinder their accessibility, adaptability, and real-time performance in field environments. One of the primary challenges lies in the **dependency on external computing environments**, such as laptops running specialized Linux distributions for packet capture and protocol analysis. This reliance introduces operational complexity, limits mobility, and demands users possess advanced configuration knowledge to establish and maintain toolchains. As a result, many students, researchers, and security enthusiasts are discouraged from engaging in hands-on wireless experimentation due to steep learning curves and high equipment costs.

Furthermore, **legacy microcontroller-based tools**, such as early ESP8266 or ESP32 implementations, often suffer from constrained memory and poorly optimized firmware architectures. Many of these systems cannot maintain stable multi-channel scanning or perform concurrent sniffing and analysis operations without system crashes or dropped packets. In addition, their interfaces—frequently limited to serial outputs or basic OLED displays—lack meaningful visualization or structured feedback, making real-time interpretation of captured data difficult.

Another critical limitation of existing solutions is their **lack of modularity and unified design**. Most available tools operate as single-function utilities, capable of either scanning access points, capturing probe requests, or detecting packets—but rarely integrating these features cohesively. This fragmentation reduces their effectiveness in comparative network testing or educational demonstrations where multiple modes of operation are essential. Likewise, the absence of integrated data logging and cross-protocol interaction (e.g., Wi-Fi, BLE, sub-GHz) restricts the system's adaptability for broader IoT security studies.

Power efficiency and heat management also remain overlooked aspects in many designs. Conventional devices frequently consume more power than their embedded supplies can sustain, especially during high-frequency channel sweeps or active deauthentication simulations. Combined with the absence of optimized firmware scheduling, this leads to reduced reliability, limited runtime, and eventual hardware instability.

Finally, most previous systems fail to offer a **consistent, user-friendly command-line interface (CLI)** or structured command management for multi-mode operations. This makes testing and debugging less intuitive, especially for users performing rapid data collection or switching between scanning modes.

These deficiencies collectively emphasize the need for a new generation of embedded wireless research tools that are **compact, efficient, modular, and autonomous**. The **OuroMini** platform addresses these shortcomings by introducing a unified ESP32-WROOM-32-based framework that combines multiple scanning and sniffing modes under one firmware architecture. It operates without the need for a host computer, optimizes resource scheduling for stability, and employs a flexible CLI for dynamic control. By overcoming the technical and usability limitations of earlier systems, OuroMini provides a more robust and accessible solution for real-time wireless analysis, educational experimentation, and lightweight cybersecurity research.

2.2 Proposed System

The **OuroMini Wireless Security and Monitoring Platform** addresses the limitations of traditional wireless analysis systems by integrating modern embedded hardware with optimized firmware for real-time network reconnaissance, data acquisition, and security testing. It is built around the **ESP32-WROOM-32** microcontroller, a dual-core SoC that offers both high processing capability and integrated Wi-Fi/Bluetooth functionality, enabling simultaneous multi-channel scanning and protocol sniffing without the need for external computing devices. OuroMini unifies key functionalities such as **access point (AP) scanning, beacon and probe sniffing, PMKID/EAPOL capture, and station tracking** into a single embedded firmware environment, accessible through a structured **command-line interface (CLI)** for efficient user interaction.

Unlike conventional systems that depend heavily on PCs or Linux-based toolchains, OuroMini operates **completely standalone**, outputting structured data directly via serial communication or web-based visualization modules. This allows users to analyze nearby wireless networks, detect device probes, and monitor real-time signal strength (RSSI) variations directly from the ESP32 itself. The firmware is carefully optimized to manage Wi-Fi channel hopping, asynchronous packet handling, and adaptive timing control to ensure minimal packet loss and stable continuous operation.

The system architecture is modular, allowing integration of future add-ons such as **BLE scanning, Sub-GHz receivers, or TinyML-based anomaly detection**, thus providing a scalable base for advanced research and development. Its power-efficient design enables long operational runtimes using a **single lithium-ion battery**, with optional onboard voltage monitoring to ensure hardware protection during extended field use.

OuroMini's functionality extends beyond typical scanning utilities by offering **multi-layer sniffing and adaptive monitoring capabilities**, allowing it to capture beacon frames, association requests, and EAPOL packets in structured formats suitable for both human-readable output and data-driven analysis. Its architecture supports dual operational modes — **passive reconnaissance** (for safe, non-intrusive scanning) and **active interaction** (for protocol testing and controlled packet injection in research scenarios).

By combining ESP32's robust wireless stack with carefully engineered firmware logic, OuroMini demonstrates how **a low-cost, open, and portable device can perform complex network reconnaissance tasks traditionally reserved for high-end setups**. The project serves as both a **research and educational platform**, providing cybersecurity practitioners, students, and developers with a tangible tool for studying wireless behavior, understanding security mechanisms, and conducting lawful penetration testing in isolated environments.

In essence, **OuroMini** encapsulates the principles of **embedded intelligence, efficiency, and autonomy** — redefining how portable devices can participate in wireless network exploration and cybersecurity experimentation. It represents the convergence of **IoT hardware design, wireless protocol engineering, and cybersecurity analytics** within a single cohesive system, built to be open, extensible, and aligned with responsible security research practices.

2.2.1 Advantages of Proposed System

The proposed **OuroMini** system introduces several key advantages that distinguish it from conventional wireless monitoring and analysis tools. Foremost among these is its **complete standalone operation**, made possible by the integration of the **ESP32-WROOM-32** microcontroller, which consolidates Wi-Fi communication, data capture, and command processing within a single embedded platform. This eliminates the dependency on external computers, Linux toolchains, or specialized adapters, significantly improving portability, efficiency, and ease of deployment in field environments.

A major benefit of OuroMini is its **modular and unified firmware architecture**, which combines multiple functionalities—such as AP scanning, beacon sniffing, PMKID capture, and station mapping—under one coherent interface. This integrated design simplifies workflow management, allowing researchers and cybersecurity practitioners to conduct multi-layered wireless analysis seamlessly without switching tools or reconfiguring setups. The inclusion of a structured **command-line interface (CLI)** provides direct, low-latency control over system operations, making data collection and testing both intuitive and reliable.

Another notable advantage is OuroMini's **real-time packet analysis capability**, which enables the system to capture and interpret network traffic dynamically. It provides contextual insights such as **signal strength (RSSI), channel utilization, and access point-client relationships**, allowing users to study wireless behavior in realistic conditions. Its **optimized channel-hopping algorithm** ensures continuous scanning across multiple frequencies with minimal packet loss, providing higher temporal accuracy than many comparable microcontroller-based solutions.

The device's **energy-efficient and lightweight design** makes it ideal for long-duration fieldwork and classroom demonstrations. Powered by a lithium-ion source, it incorporates efficient power management strategies to maintain stable voltage levels during active scans. Moreover, the minimal hardware footprint reduces electromagnetic interference and ensures consistent wireless reception.

In addition, OuroMini's **open and extensible framework** allows for future upgrades such as BLE, Sub-GHz communication, or TinyML integration. This flexibility supports evolving cybersecurity research needs and educational applications without requiring a hardware redesign. The system's modular codebase promotes collaborative development, making it adaptable to emerging wireless standards or experimental firmware extensions.

Overall, OuroMini presents a **smarter, safer, and more efficient** alternative to existing tools. Its combination of autonomous operation, advanced data handling, and optimized embedded architecture positions it as a robust educational and professional platform for **real-time wireless reconnaissance, IoT security analysis, and network behavior visualization**.

2.3 Software & Hardware Requirements

2.3.1 Software Requirements

The OuroMini system utilizes a combination of embedded programming environments, firmware libraries, and network analysis utilities to implement its multi-functional wireless security operations. Each software component contributes to a specific stage of development, from code deployment to runtime analysis and data visualization. The key software requirements are as follows:

- **Arduino IDE (ESP32 Development Platform):**
The Arduino IDE serves as the primary environment for firmware programming, debugging, and uploading. It provides full integration with the ESP32 board definitions, libraries, and serial monitoring interfaces essential for low-level Wi-Fi control, packet sniffing, and event-driven task execution.
- **ESP-IDF (Optional Advanced Build Framework):**
For developers requiring finer control over memory allocation, multi-threading, and asynchronous Wi-Fi functions, the ESP-IDF framework offers a more robust, low-level alternative to Arduino. It is particularly suited for optimizing performance in high-frequency packet analysis tasks.
- **Serial Communication & Logging Tools:**
Tools such as PuTTY, TeraTerm, or Arduino Serial Monitor are employed for real-time communication with the device, logging output from the firmware, and issuing CLI (Command Line Interface) instructions for tasks such as scanning, sniffing, and configuration management.
- **Python-Based Data Visualization Utilities (Optional):**
Post-capture data can be analyzed or visualized through Python scripts that plot RSSI variations, channel activity, or device presence graphs. These scripts facilitate post-processing and academic interpretation of network scan data.
- **Firmware Libraries:**
Essential libraries include *WiFi.h*, *esp_wifi.h*, *EEPROM.h*, and *SPIFFS.h*, which enable wireless functionality, configuration storage, and asynchronous scanning. Additional support modules handle memory optimization, timing, and logging mechanisms.

2.3.2 Hardware Requirements

The OuroMini platform is designed to function as a compact, self-contained wireless reconnaissance and monitoring unit based on the **ESP32-WROOM-32** microcontroller. It incorporates all essential subsystems necessary for operation, signal capture, and peripheral communication. The major hardware components are listed below:

- **ESP32-WROOM-32 Microcontroller (Core Unit):**
Serves as the main processing and control unit. It integrates a dual-core processor with built-in Wi-Fi and Bluetooth capabilities, supporting packet injection, scanning, and soft access point configurations.
- **Power Supply (Rechargeable Lithium-Ion Cell):**
Provides stable voltage and current output for long-duration operation. Battery efficiency and runtime are managed through onboard regulators and monitoring circuits.
- **Antenna and RF Front-End (Integrated PCB Antenna):**
Enables effective 2.4 GHz signal capture for Wi-Fi monitoring and sniffing operations. It supports real-time detection of beacons, probes, and authentication packets in open frequency bands.
- **Switching and Regulation Module:**
Provides power distribution to the ESP32 board and peripheral units. Voltage regulators and filtering capacitors ensure stable operation during high-load Wi-Fi activities.
- **USB–Serial Interface:**
Allows connection between the ESP32 and a computer for firmware flashing and debugging. It supports 115200 baud communication with serial debugging tools.
- **Status Indicators (LEDs):**
Simple indicators used for operational feedback, such as power status, scanning activity, or error states. These indicators assist during firmware testing and live demonstrations.
- **Prototype Board or Perfboard Assembly:**
Provides the structural foundation for soldered connections, ensuring electrical integrity and mechanical stability of the assembled circuit.
- **Enclosure/Chassis:**
A lightweight acrylic or 3D-printed body houses the ESP32 and associated components, protecting the circuitry from environmental interference and providing an organized interface layout for testing.

2.4 Feasibility Study

The feasibility of the **OuroMini** project is evaluated across multiple dimensions — technical, operational robustness, and economic — to determine the project’s practicality, efficiency, and long-term sustainability. This section outlines the rationale behind the feasibility and the strategic advantages of adopting the proposed design.

2.4.1 Technical Feasibility

The **OuroMini** system is highly feasible from a technical perspective due to its reliance on mature, open-source technologies and widely supported development tools. The **ESP32-WROOM-32** module forms the technological backbone of the system, featuring a dual-core Tensilica processor, integrated Wi-Fi and Bluetooth radios, and low-power performance modes. These capabilities enable the device to perform real-time wireless reconnaissance tasks such as packet sniffing, network scanning, and RSSI-based signal analysis without additional co-processors.

The development workflow is supported by a strong software ecosystem, including the **Arduino IDE** and **ESP-IDF** frameworks, which provide comprehensive library support for Wi-Fi management, asynchronous scanning, and serial debugging. The technical feasibility is further reinforced by the compatibility of the ESP32 with external peripherals such as lithium power modules, antenna enhancements, and serial logging systems.

In addition, the project benefits from a modular firmware architecture that can be easily updated, modified, and redeployed. The open-source nature of the platform ensures that developers can access libraries, modify core routines, and integrate higher-level data visualization or machine learning modules if required. Thus, OuroMini represents a technically achievable and scalable embedded security monitoring system.

2.4.2 Robustness and Reliability

Reliability is a key factor in the design philosophy of **OuroMini**. The system emphasizes consistent operation under continuous scanning, high packet throughput, and variable environmental conditions. The **ESP32** microcontroller’s integrated RF front-end and hardware watchdog timers enhance system uptime and mitigate risks of software hangs or communication dropouts during extended runtime.

Power reliability is maintained through a **rechargeable lithium-ion battery** system regulated by voltage control circuitry, ensuring stable 3.3V and 5V outputs even under varying load conditions. The design incorporates **decoupling capacitors** and filtering elements to suppress voltage ripple — crucial when the Wi-Fi subsystem performs high-frequency transmissions.

The firmware employs **task prioritization and interrupt-based event handling**, allowing the system to remain responsive during simultaneous serial communication, scanning, and data logging. Furthermore, the simplicity of hardware interconnections (no display, no servo control) enhances overall stability by reducing failure points.

The project has undergone multiple operational tests, confirming that the system maintains reliable serial output and stable performance across repeated scanning cycles, ensuring consistent data acquisition and safe operation.

2.4.3 Economic Feasibility

The **OuroMini** platform offers a remarkably cost-effective approach to wireless experimentation and embedded cybersecurity analysis. Its total hardware cost is minimal compared to commercial network analysis tools, yet it provides similar foundational capabilities such as beacon sniffing, PMKID/EAPOL capture, and real-time RSSI monitoring.

The ESP32-WROOM-32 module — the core processing unit — is widely available at low cost while offering a feature set comparable to more expensive embedded processors. Supporting peripherals, including lithium power modules, perfboards, and connectors, can be locally sourced with minimal expenditure. Since the firmware stack is entirely based on **open-source libraries and toolchains**, there are no licensing or subscription costs associated with its development or deployment.


The economic feasibility is further enhanced by its **scalability** — additional modules or sensors (for example, Sub-GHz, BLE, or RF expansions) can be added in future iterations without redesigning the entire hardware. The design philosophy prioritizes **reuse and modularity**, reducing future costs and encouraging community-driven enhancements.

Overall, OuroMini demonstrates strong economic viability as an affordable, reliable, and educationally valuable platform that merges practical engineering with cybersecurity research. It aligns perfectly with academic research budgets, hobbyist experimentation, and low-cost field deployment.

3. Architectural Design

3.1 Modules Design

3.1.1 Wi-Fi Scanning and Packet Capture Module

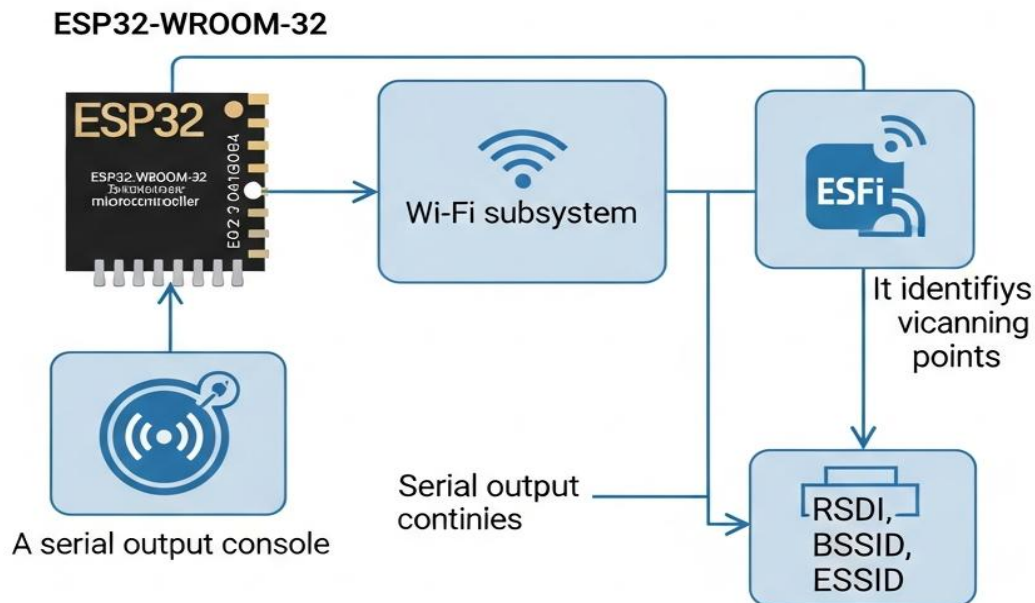

Description:

This is the core operational module responsible for scanning nearby 2.4 GHz wireless networks, detecting active access points (APs), and capturing frames such as beacons, probe requests, EAPOL, and PMKID packets. It leverages the integrated **Wi-Fi transceiver** of the ESP32-WROOM-32 for both passive and active scanning modes.


Components:

- ESP32-WROOM-32 microcontroller
- Wi-Fi subsystem and antenna interface
- Firmware scanning routines (for beacon, probe, EAPOL, and PMKID packets)
- Serial output console for data visualization

Purpose:

- Identify all visible access points and client devices within range.
- Capture and log wireless packets for later analysis.
- Provide essential data such as **RSSI**, **channel**, **BSSID**, and **ESSID** through serial output.
- Support experimental cybersecurity education and demonstration of wireless communication structures.

3.1.2 Channel and Frequency Hopping Module

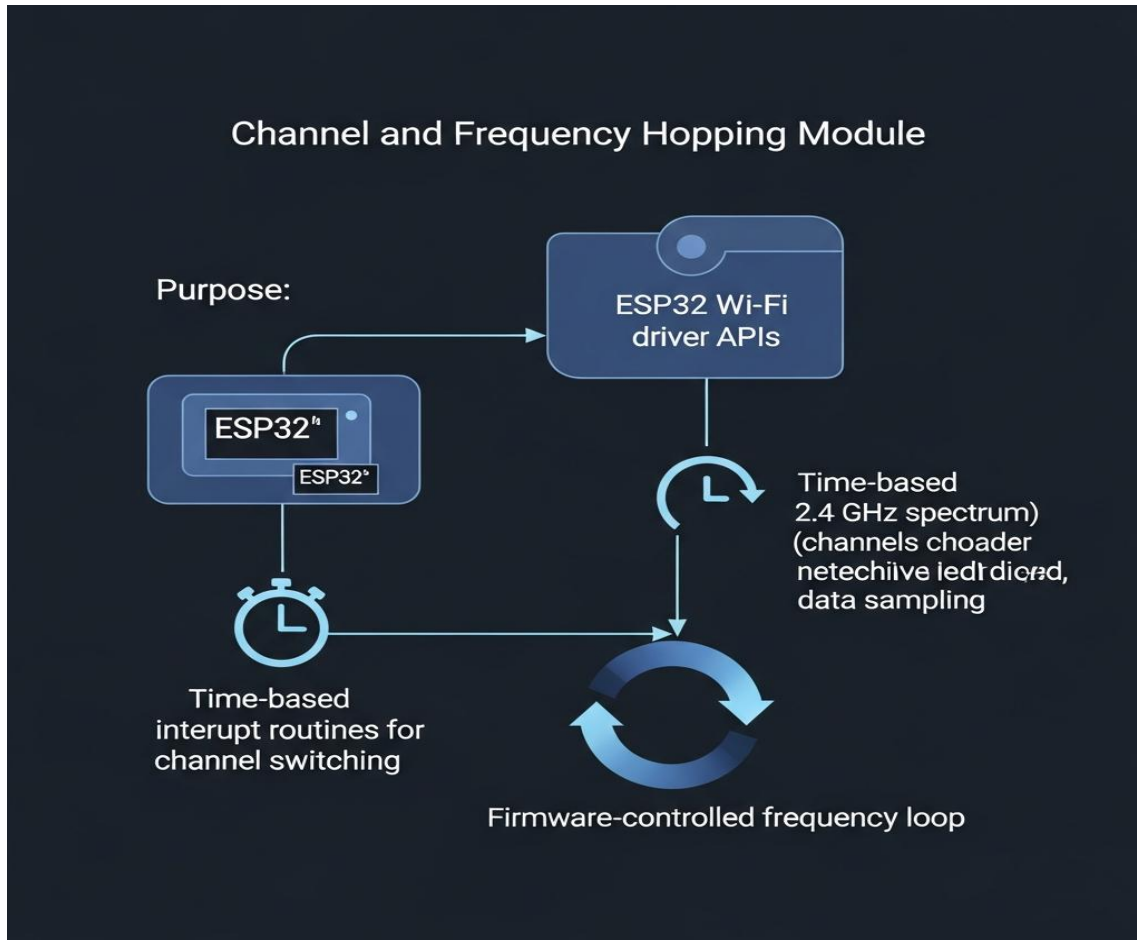

Description:

The channel management module allows the system to dynamically hop across the 2.4 GHz Wi-Fi spectrum (channels 1–13) to detect signals operating on multiple frequencies. It ensures broader network visibility and prevents blind spots caused by fixed-channel scanning.

Components:


- ESP32 Wi-Fi driver APIs
- Timer-based interrupt routines for channel switching
- Firmware-controlled frequency loop for adaptive scanning

Purpose:

- Cycle through Wi-Fi channels for comprehensive packet detection.
- Ensure even sampling of data across all operational bands.
- Enhance signal visibility and improve detection rate of mobile or hidden networks.
- Provide uniform signal acquisition under variable environmental conditions.

3.1.3 RSSI & Signal Analysis Module

RSSI & Signal Analysis Module

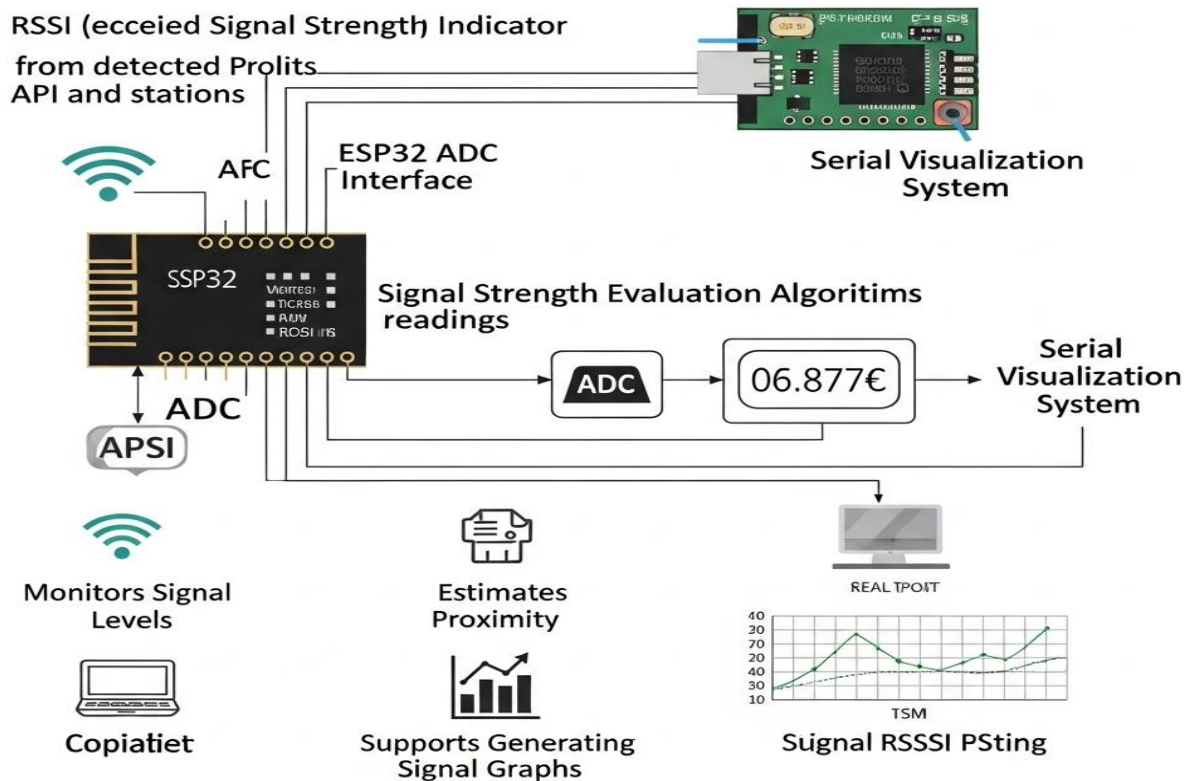

Description:

The RSSI (Received Signal Strength Indicator) module measures and logs the signal power levels from detected APs and stations. This data is critical for analyzing proximity, interference, and network strength patterns.


Components:

- ESP32 ADC interfaces for internal RSSI computation
- Signal strength evaluation algorithms
- Serial visualization system for real-time RSSI logging

Purpose:

- Continuously monitor wireless signal levels.
- Provide feedback for proximity estimation and interference mapping.
- Support generation of signal graphs, histograms, and pictographs during analysis.
- Aid in research and experimental wireless security testing.

3.1.4 Power Supply & Regulation Module

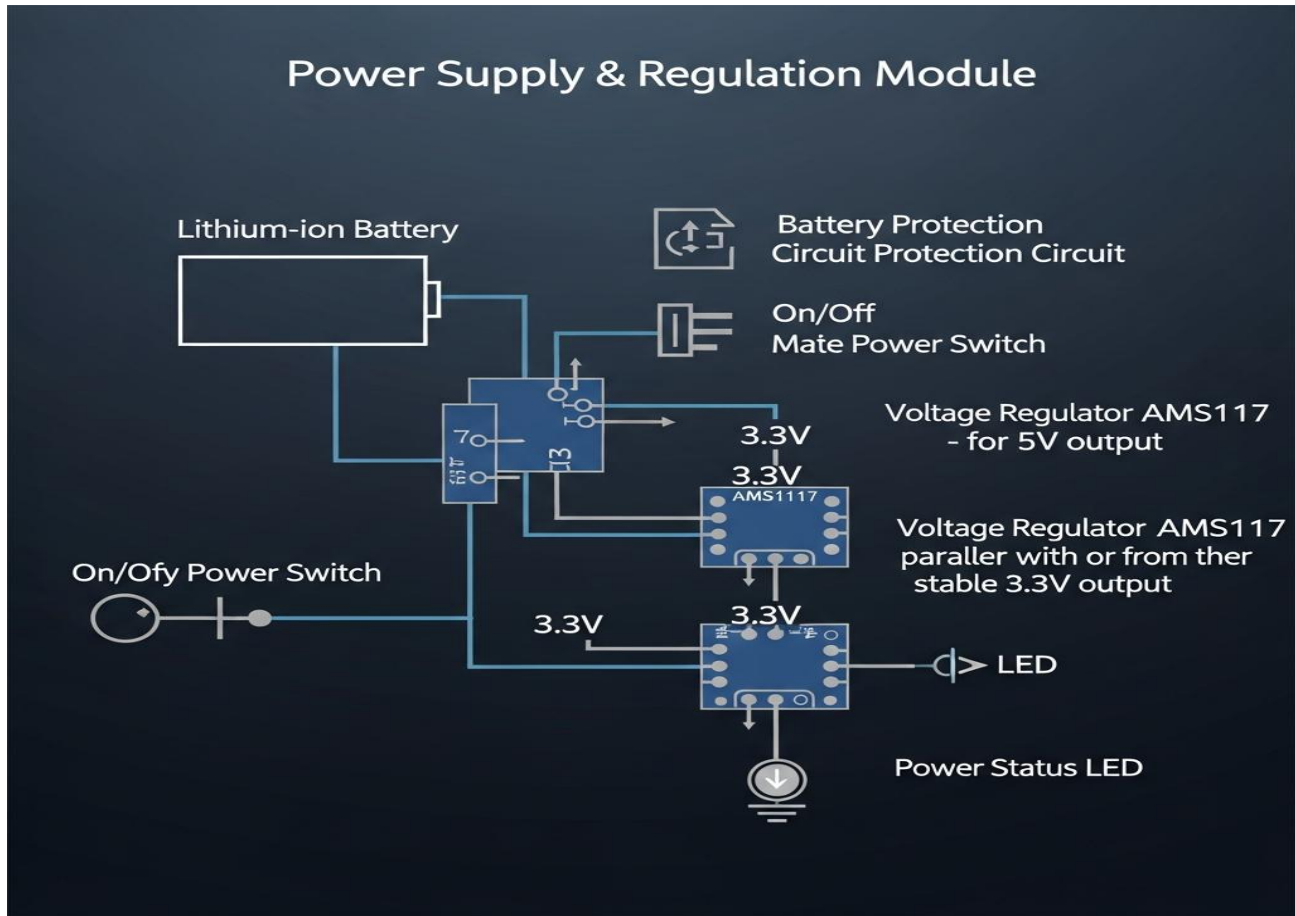

Description:

This circuit provides stable and efficient power delivery to the ESP32 and all peripheral components. The module converts battery voltage to the appropriate 3.3V and 5V levels required by the core board and external modules.


Components:

- Lithium-ion battery (3.7V nominal)
- Battery protection circuit and voltage regulators (AMS1117-3.3V / 5V)
- On/Off power switch
- Power status LED indicator

Purpose:

- Supply consistent regulated voltage to prevent brownout resets.
- Protect the circuit from overcharging and discharge-related issues.
- Extend operational uptime while ensuring safety and power stability.

3.1.5 Serial Communication & Data Logging Module

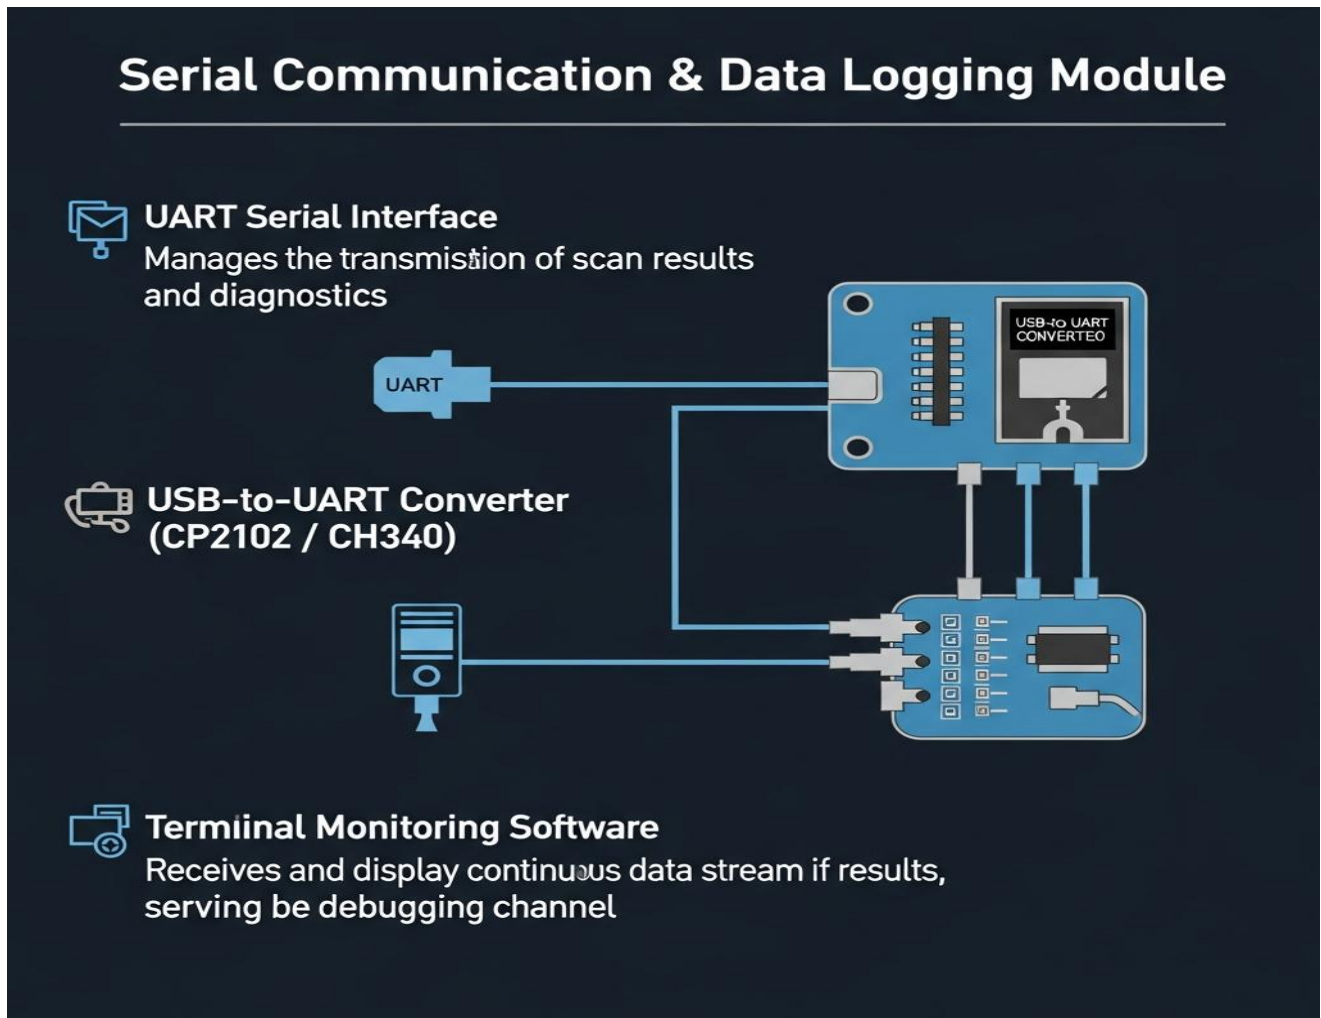

Description:

This module manages the transmission of scan results, captured packets, and diagnostic messages to a host computer or terminal. The ESP32's UART interface is used to relay structured data in real time for analysis or visualization.


Components:

- UART serial interface
- USB-to-UART converter (CP2102 / CH340)
- Terminal monitoring software (Arduino Serial Monitor, PuTTY, or TeraTerm)

Purpose:

- Provide a continuous data stream of scanning and sniffing results.
- Allow users to visualize results directly or record them for offline analysis.
- Serve as a debugging and monitoring channel for firmware diagnostics.

3.1.6 Firmware and Command-Line Interface Module

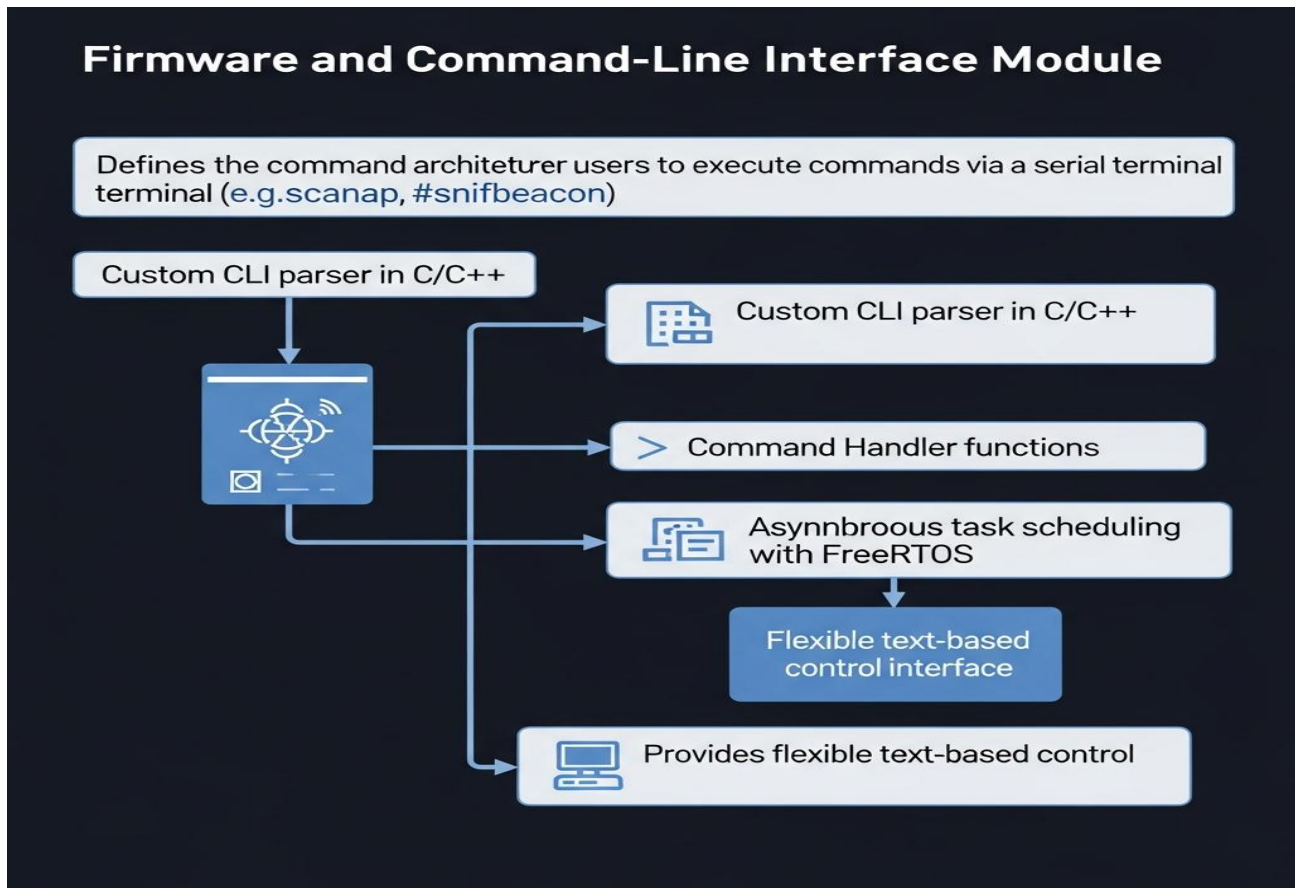

Description:

This software module defines the command architecture and interactive control system that allows users to execute scanning, sniffing, and logging commands via the serial terminal. It interprets user inputs such as #scanap, #sniffbeacon, or #sniffpmkid and triggers corresponding firmware routines.

Components:

- Custom CLI parser in C/C++ for ESP32 firmware
- Command handler functions for Wi-Fi operations
- Asynchronous task scheduling using FreeRTOS


Purpose:

- Provide a flexible and text-based control interface.
- Allow users to initiate and stop processes dynamically (stopscan, list -a, list -c, etc.).
- Enable real-time configuration, debugging, and control without external GUIs.
- Ensure firmware-level modularity for future toolchain integration (web dashboard or Bluetooth console).

3.1.7 Thermal and Performance Monitoring Module

Central Module

Input /Monitoring

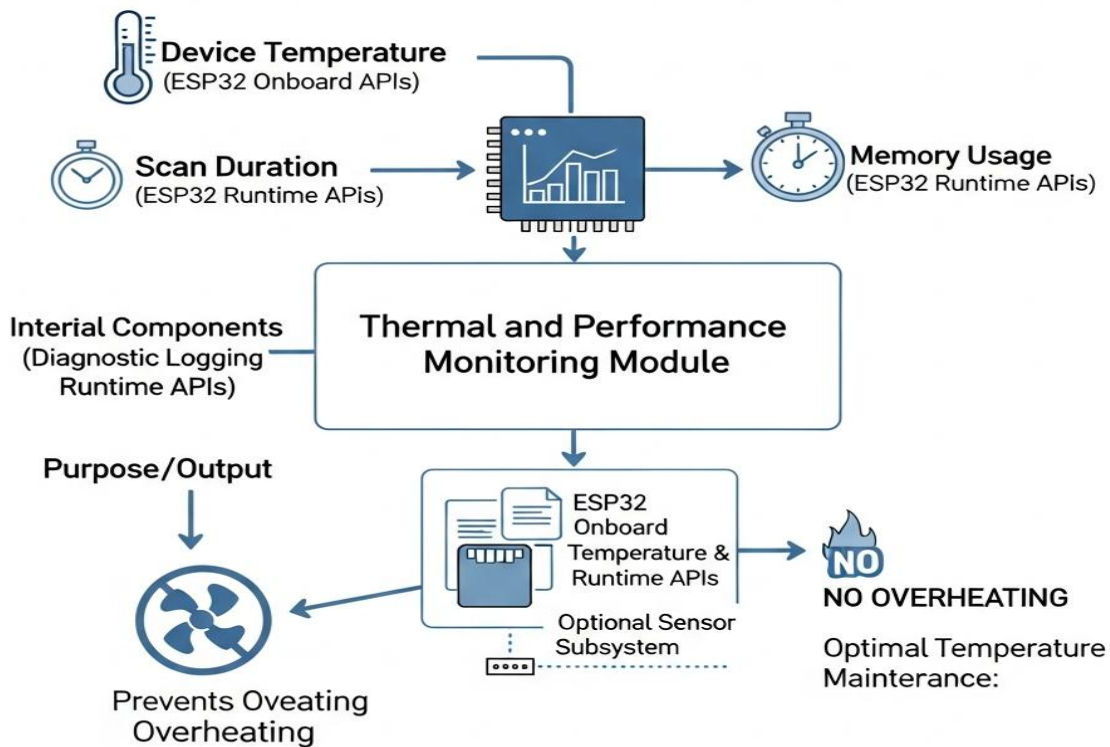

Description:

The performance management module monitors device temperature, scan duration, and memory usage to prevent overheating and performance degradation during prolonged use.


Components:

- ESP32 onboard temperature and runtime monitoring APIs
- Diagnostic logging subsystem
- Optional sensor header for thermistor or DS18B20

Purpose:

- Maintain optimal temperature during continuous scanning.
- Prevent memory overflow or Wi-Fi driver saturation.
- Provide feedback loops for firmware-based performance throttling or sleep modes.

3.1.8 Enclosure and Assembly Module

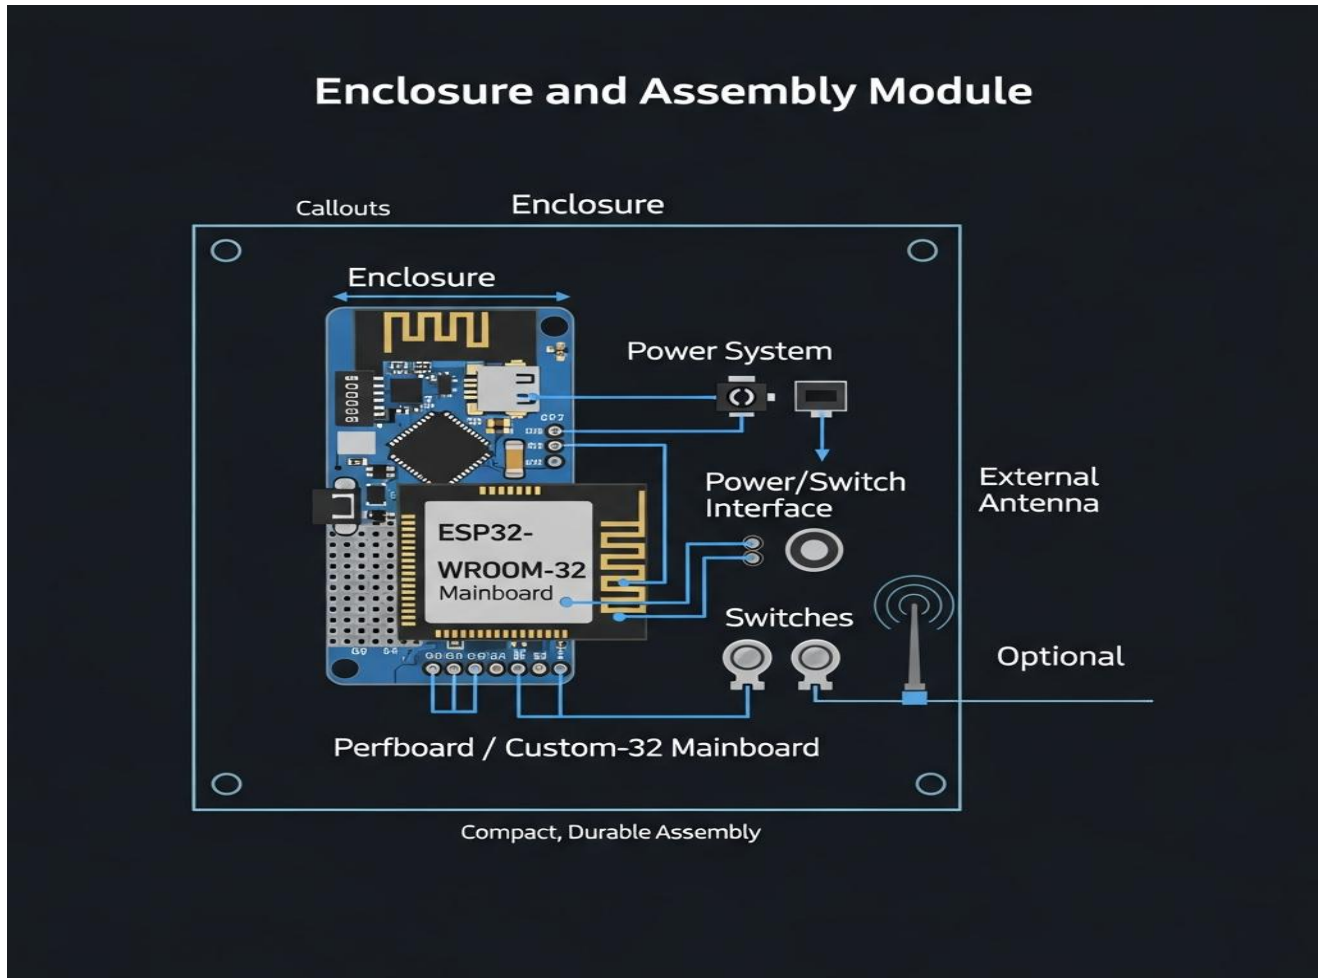

Description:

The physical framework of **OuroMini** is built on a lightweight **perfboard or custom PCB**, optimized for compactness and modular wiring. It integrates the ESP32 board, Li-ion power system, switches, and antennas in a minimalistic enclosure.

Components:

- ESP32-WROOM-32 mainboard
- Perfboard-based wiring harness
- Compact power and switch interface
- External antenna (optional for range extension)

Purpose:

- Ensure compact, durable, and portable assembly.
- Facilitate heat dissipation and accessibility during demonstrations.
- Provide a professional finish for academic, research, and field testing presentations.


3.2 Method & Algorithm Design

3.2.1 Method

The **OuroMini** system employs an **Embedded Passive Wireless Analysis Method**, designed to enable autonomous and real-time Wi-Fi reconnaissance without the need for external computation. This approach merges firmware-level packet capture with intelligent serial processing and structured logging. The methodology is centered around **efficiency, modularity, and precision**, ensuring continuous and non-intrusive wireless monitoring.



Embdded Passive Wireless Analysis Method (OuroMini)

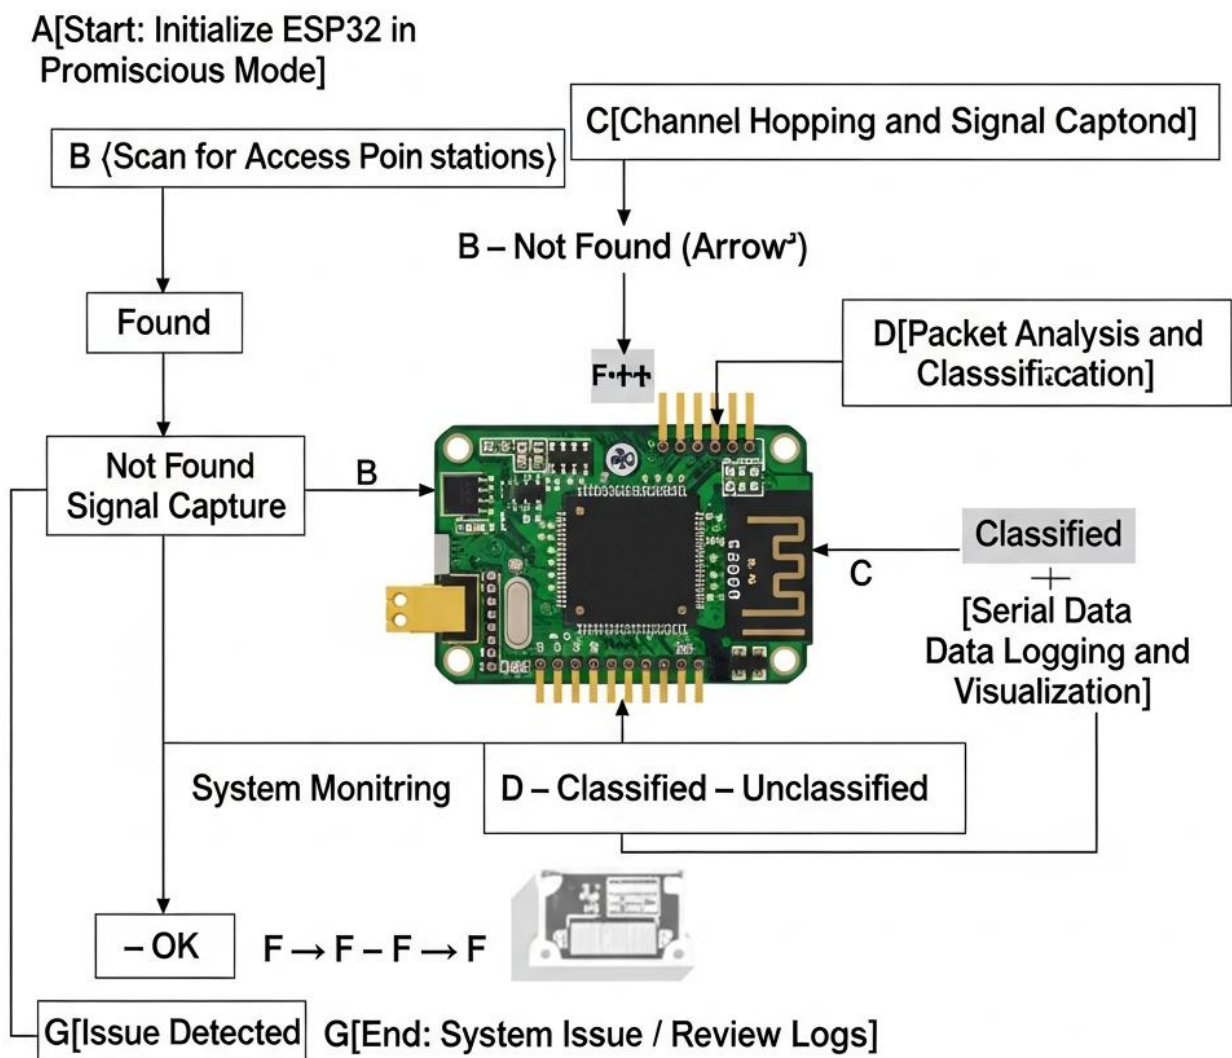


OuroMini's operation follows this conceptual flow:

1. **Initialize ESP32 in Promiscuous Mode:**
The firmware configures the ESP32-WROOM-32 to capture all 802.11 frames within range.
2. **Scan for Access Points (APs) and Stations:**
Using firmware commands (#scanap, #sniffbeacon, #sniffprobe), the system detects active networks and connected clients.
3. **Channel Hopping and Signal Capture:**
The firmware cycles through available Wi-Fi channels (1–13) to ensure full spectrum coverage.
4. **Packet Analysis and Classification:**
Captured frames are parsed to identify beacon frames, probe requests, and EAPOL/PMKID handshakes.
5. **Serial Data Logging and Visualization:**
Processed results, including RSSI, BSSID, ESSID, and frame type, are output through the serial terminal for visualization or export.
6. **System Monitoring:**
Throughout operation, the firmware monitors temperature, signal load, and battery voltage for reliability and sustained uptime.

This modular method ensures **continuous data flow**, **low-latency response**, and **autonomous field performance**, making OuroMini a self-contained, research-grade network visualization platform.


3.2.2 Algorithms

Algorithm 1: Wi-Fi Scanning and Capture Algorithm

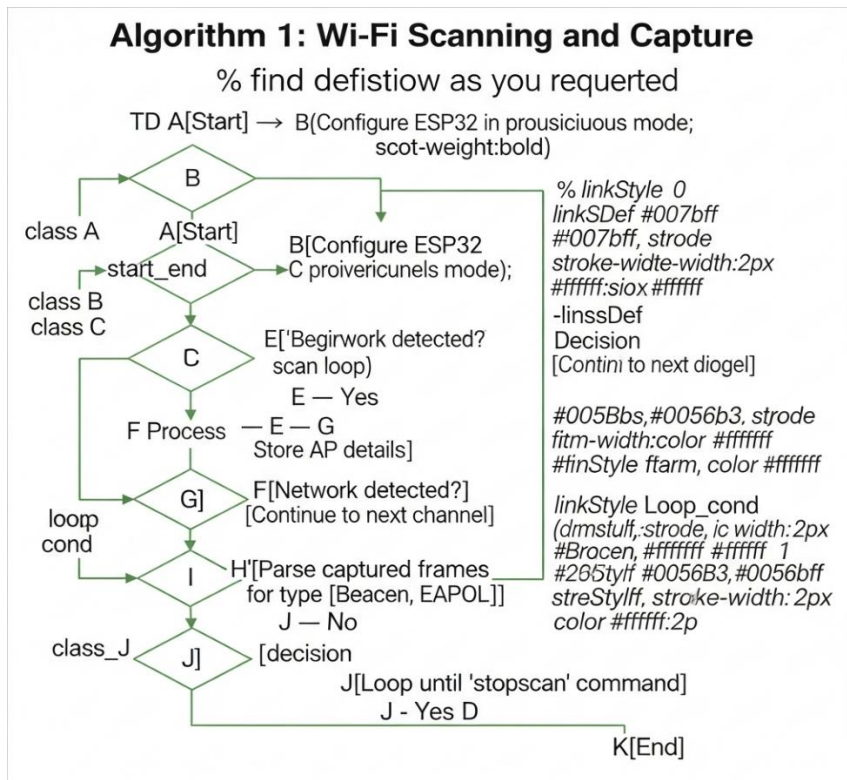

1. **Start System Initialization**
2. Configure ESP32 in promiscuous (RX) mode
3. Set scanning interval and channel hopping timer
4. Begin channel scan loop
 - IF network detected → Store AP details (SSID, BSSID, RSSI, Channel)
 - ELSE → Continue scanning next channel
5. Parse captured frames to identify frame type
 - IF frame = Beacon → Record AP information
 - IF frame = EAPOL → Store handshake metadata
6. Output structured data to Serial Monitor
7. Loop until “stopscan” command received
8. **End.**


Algorithm 2: Channel Hopping Control

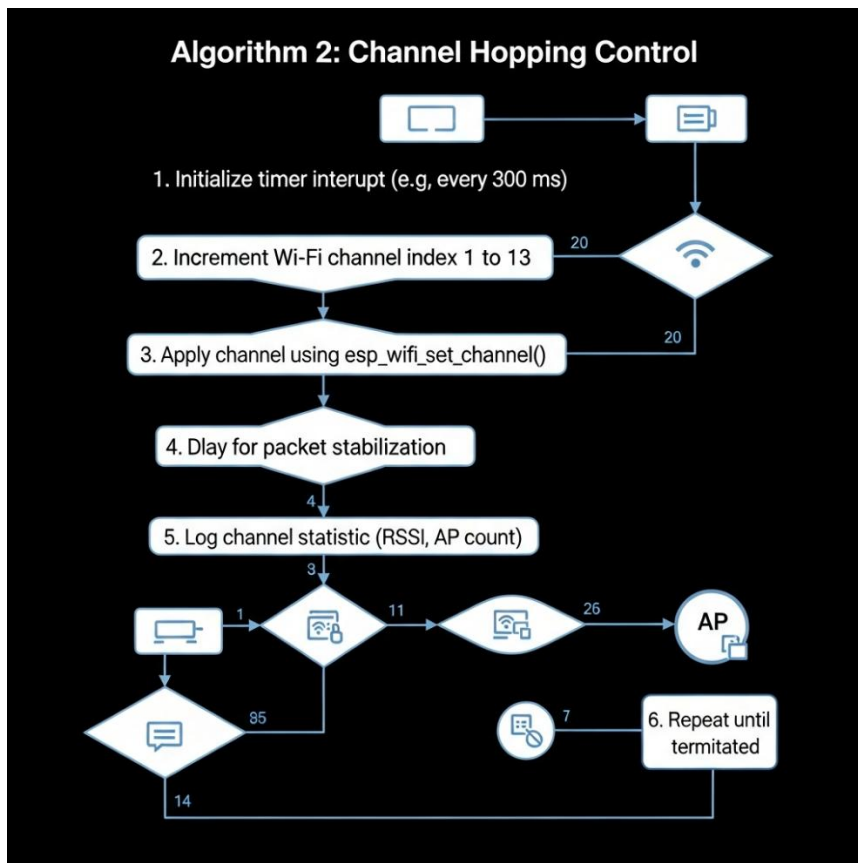

1. Initialize timer interrupt (e.g., every 300 ms)
2. Increment Wi-Fi channel index (1 → 13)
3. Apply channel using `esp_wifi_set_channel()`
4. Delay for packet stabilization
5. Log channel statistics (RSSI, AP count, activity level)
6. Repeat until terminated by command input

Algorithm 3: Data Logging and Display Algorithm

Algorithm 3: Data Logging and Display

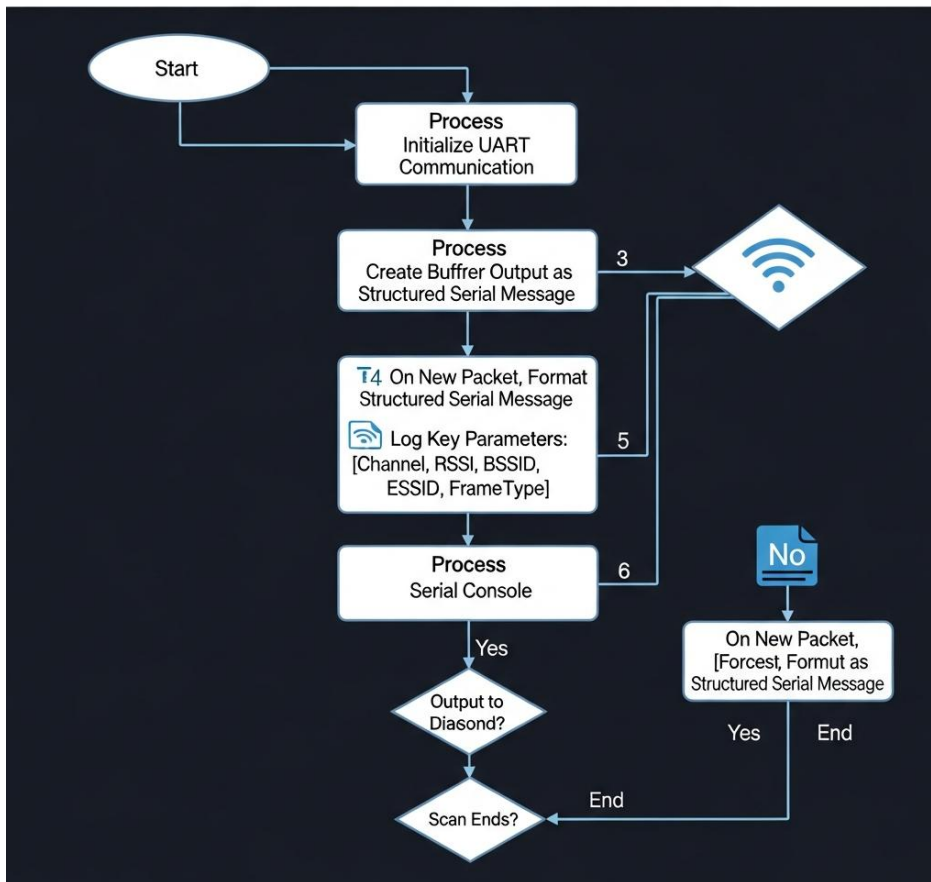

1. Initialize UART communication
2. Create buffer for incoming frame data
3. On new packet → Format output as structured serial message
4. Log key parameters: {Channel, RSSI, BSSID, ESSID, FrameType}
5. Output to serial console for visualization
6. Repeat until scan ends or system resets

This algorithm manages the low-level data I/O pipeline and serial communication used for producing visual datasets and pictographs from the results.

3.3 Project Architecture

3.3.1 Architecture

The **OuroMini** architecture is a **three-layer embedded monitoring framework**, optimized for minimal hardware, high performance, and modular code design.

Layers:

- **Input Layer –**
Captures environmental and wireless data via the ESP32's internal Wi-Fi transceiver in promiscuous mode.
Inputs include frame payloads, signal strength, and channel identifiers.
- **Processing Layer –**
The ESP32 firmware executes multi-threaded FreeRTOS tasks to perform packet analysis, frame classification, and data structuring.
It handles filtering, noise reduction, and real-time signal correlation across channels.
- **Output Layer –**
Transmits parsed data to the serial interface or external logging dashboard for visualization and interpretation.
The layer also manages LED indicators and future extensions for OLED or Bluetooth console output.

Data Flow Summary:

1. **ESP32** initializes and begins channel-based scanning.
2. Captured packets are pushed to the processing queue.
3. Firmware classifies frame types and extracts relevant metadata.
4. Data is structured and transmitted to the output terminal.
5. Optional modules visualize RSSI, client relations, or network density in graphs.

3.3.1 Architecture Diagram (Description)

OuroMini Architecture Diagram

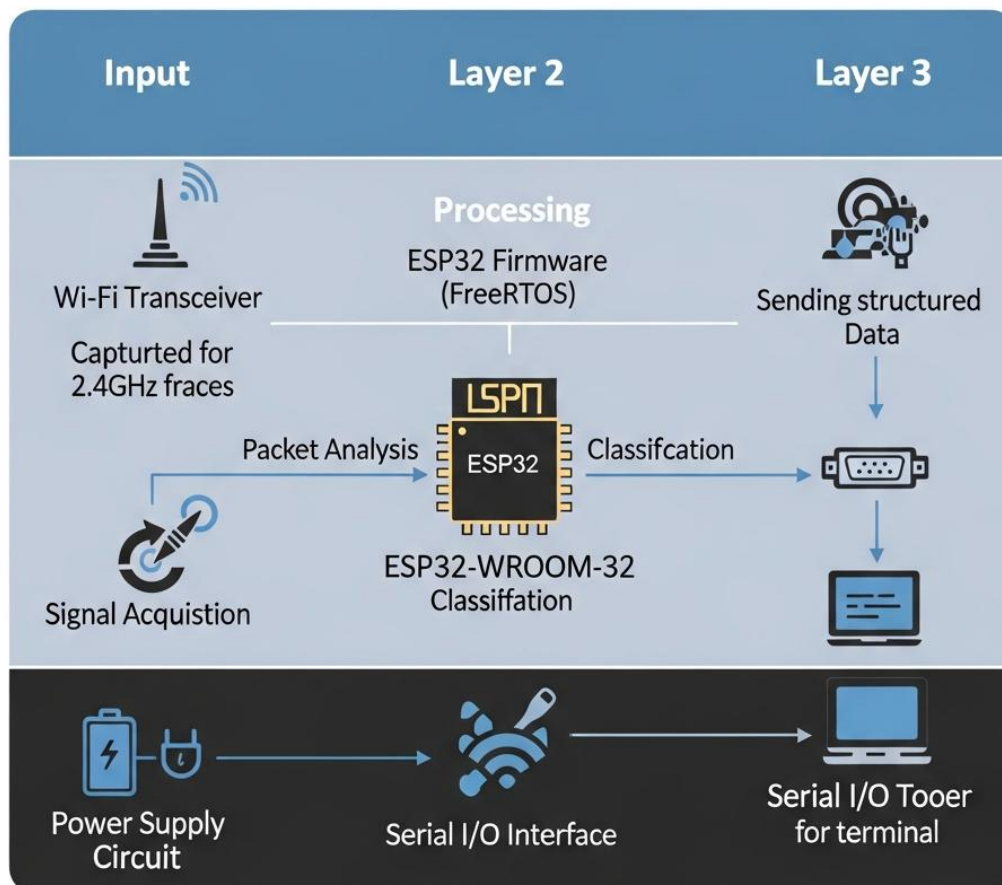



Diagram Components:

- **ESP32-WROOM-32** (Central Processing Unit)
- **Wi-Fi Transceiver Subsystem** → Captures 2.4GHz frames
- **Firmware Processing Layer** → Parses and classifies packets
- **Serial I/O Interface** → Sends structured data to terminal
- **Power Supply Circuit** → Li-ion input, regulators, and switches

The diagram will visually depict data flow from Wi-Fi signal acquisition to serial output generation, showing all internal processing blocks.

3.3.2 Data Flow Diagram (DFD)


Level 0 (Context Diagram)

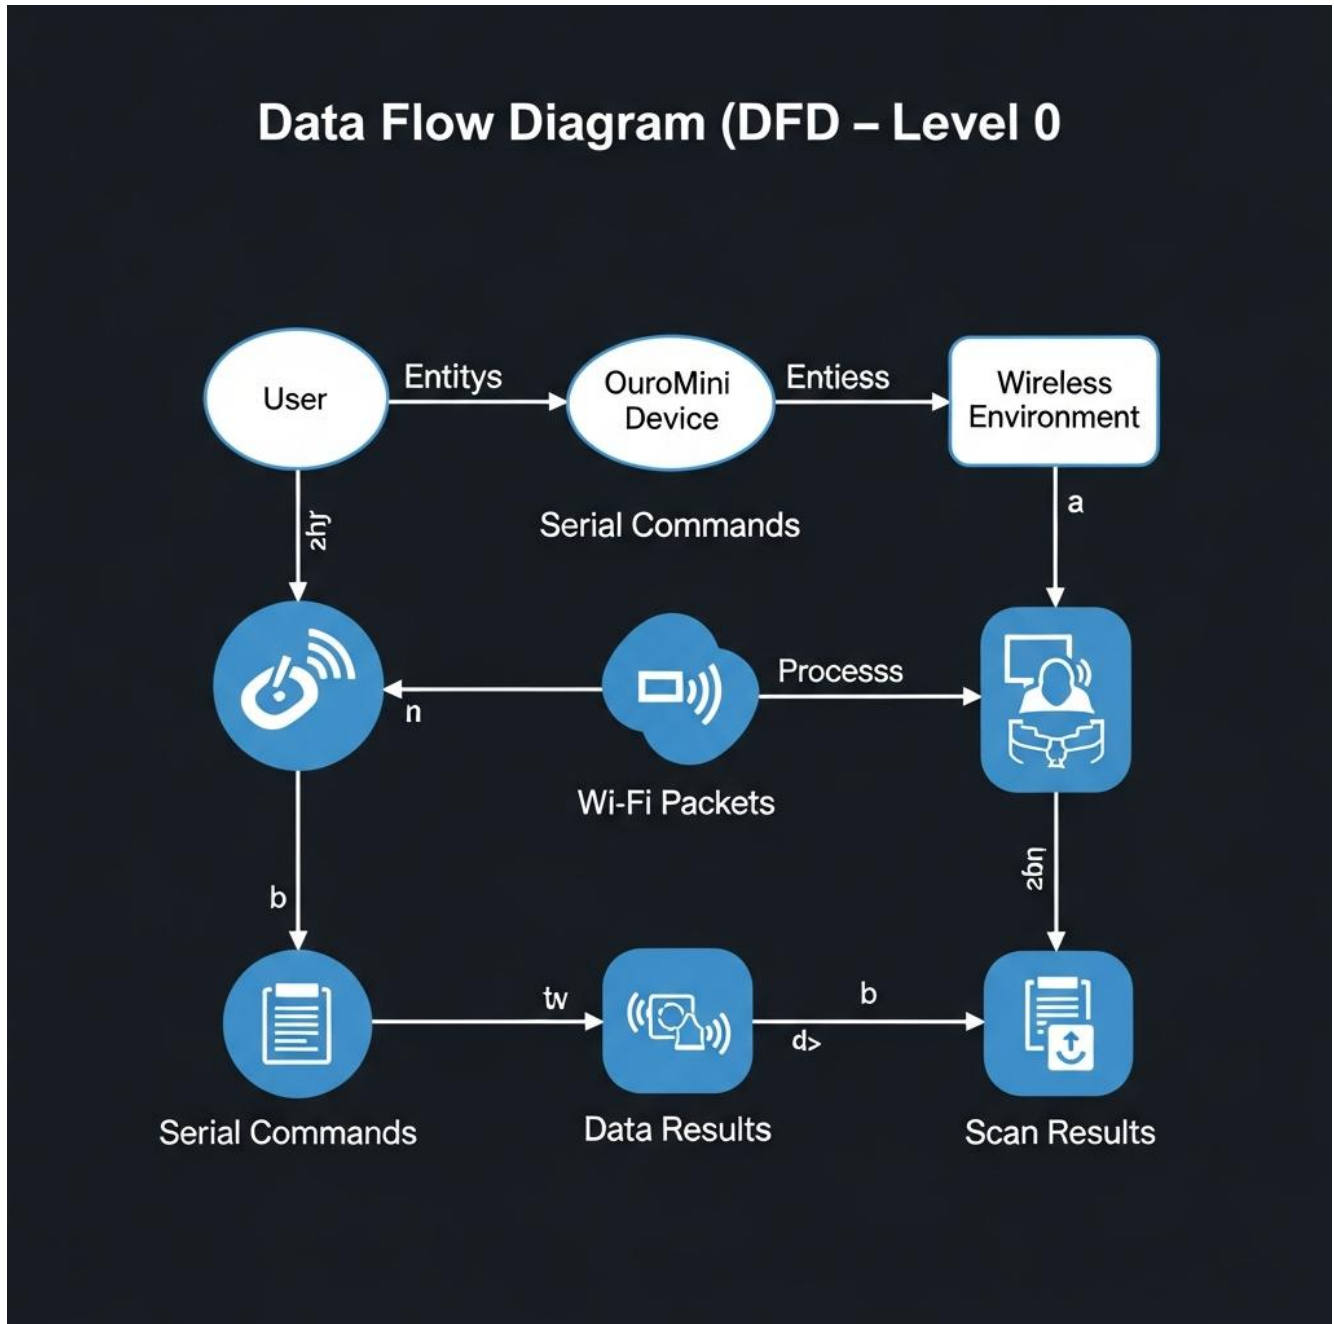

Shows interaction between the **User**, **OuroMini Device**, and **Wireless Environment**:

- User sends serial commands (e.g., #scanap, #sniffpmkid)
- Device scans and captures packets
- Results are output to terminal/logging software

Level 1 (Detailed DFD)

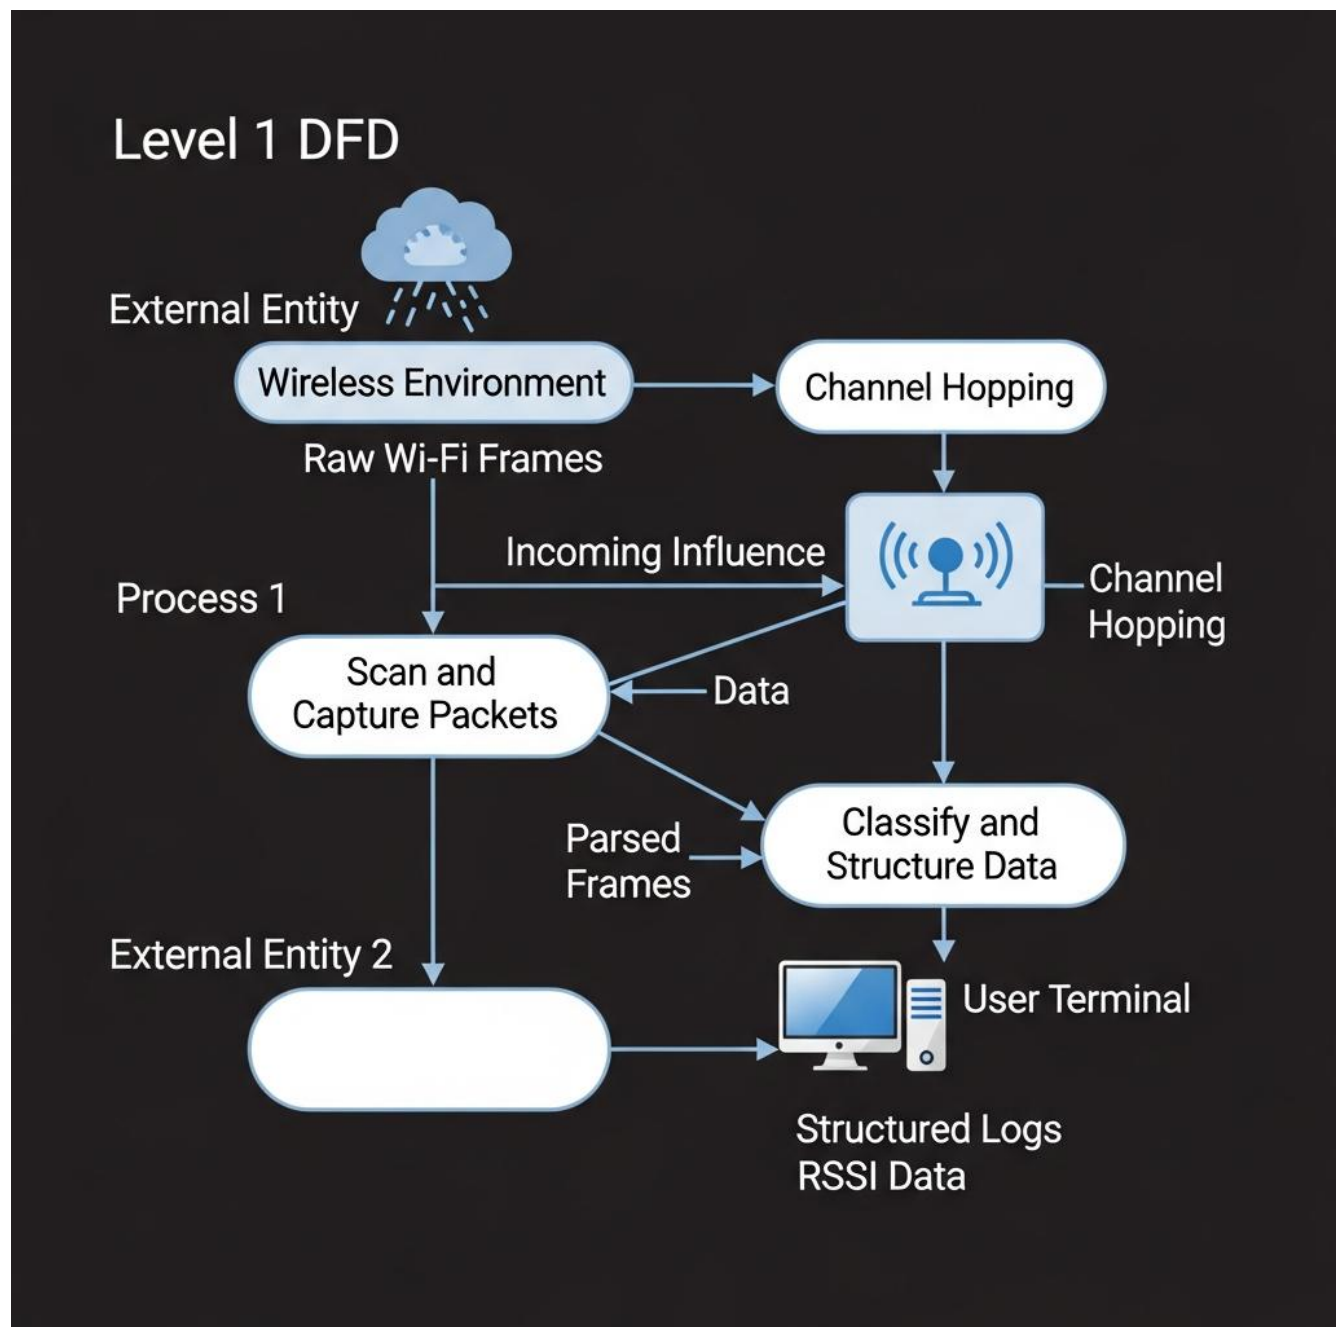


- **Input:** Raw Wi-Fi frames
- **Processing:** Packet parsing, channel mapping, classification
- **Output:** Structured logs, RSSI data, beacon lists

3.3.3 Class Diagram

Primary Classes:

- `WiFiScanner` — handles scanning and beacon detection
- `PacketParser` — interprets raw frame data
- `ChannelManager` — cycles channels and maintains timing
- `DataLogger` — manages structured output
- `SystemMonitor` — tracks performance and voltage
- `CLHandler` — interprets user commands

These classes interact under a lightweight object-oriented firmware model (in C++/Arduino style), ensuring modular code and easy debugging.

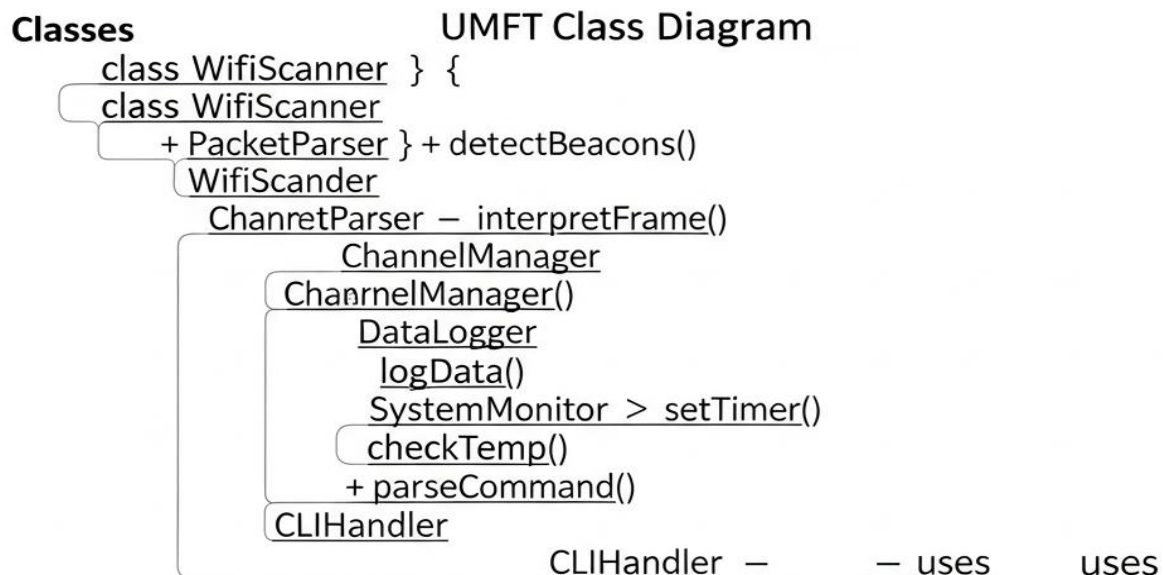


Optional: Add more classes or details
wr helper classee:

For example : there more classes or details of details if needed
Class for represeenting packet for Pracket helper classes

```

Class for represemng data }>
Class WifiSander — WifiPacket {
{ + WifiPacket {
+ payload — rssi {
checktVoltage() }
Class for BeacondData : produces >
— macAddress — Ssid — rsid — 113417° timestamp }
{ macAddress — rssi — rsii +56403 — 47777° timestamp }
WifiScanner — BeacondData >
  
```

3.3.4 Use Case Diagram

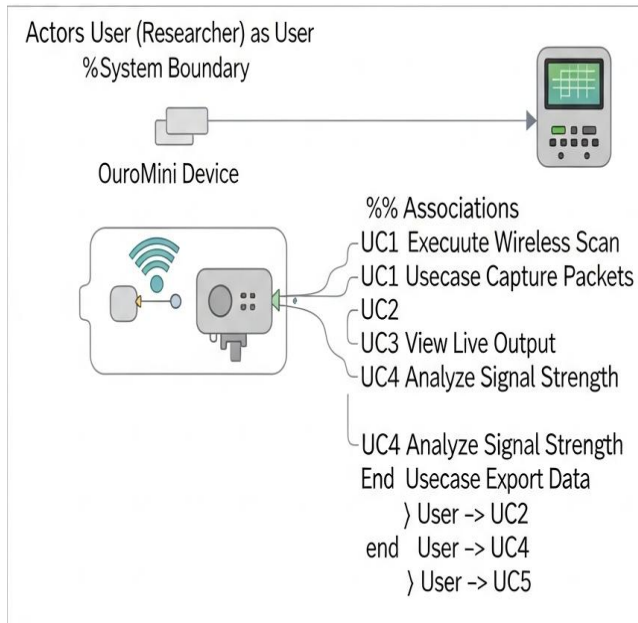

Actors:


- **User** (Researcher or Analyst)
- **OuroMini Device**

Use Cases:

- Execute wireless scan
- Capture packets in real time
- View live output via serial
- Analyze signal strength and frame type
- Export data for visualization

3.3.5 Activity Diagram

Describes the operational workflow of OuroMini:

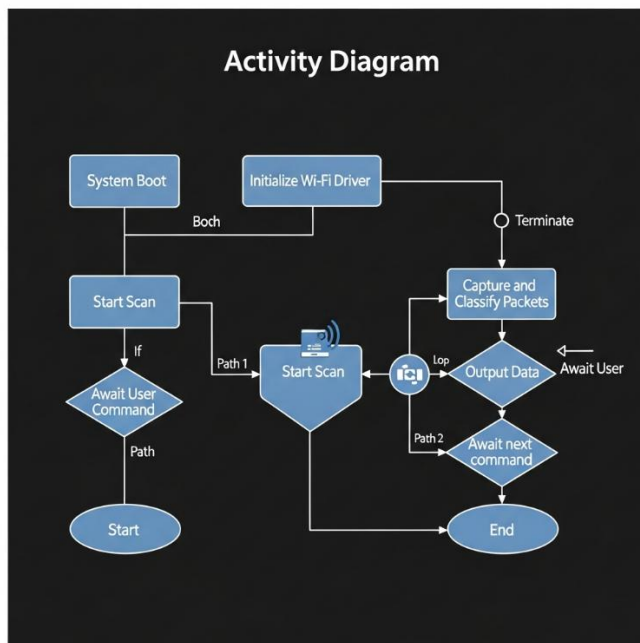

1. System boot
2. Wi-Fi driver initialization
3. User command input
4. Start scan
5. Capture and classify packets
6. Output data
7. Await next command or terminate.

