


BMI088 Rev1.9 p52/53: accel SDO1=3V3 (0x19), gyro SDO2=GND (0x68), PS=3V3 selects I2C, CSB2 pin5 is DNC in I2C mode, CSB1 pin14=3V3. Pin 2 is GND despite its NC name. C319/C320 are the local 100nF for VDD/VDDIO.



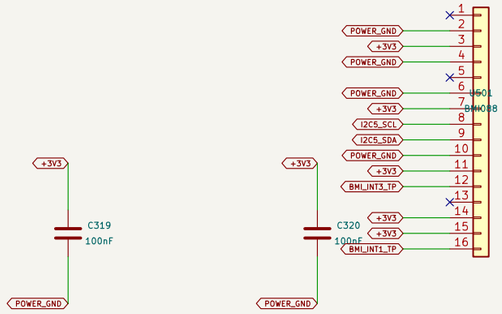





INT3/INT1 are testpoint/candidate GPIO nets; exact host GPIO assignment remains pending.

R501/R502: 4.7k to 3V3. Start at 100kHz; total bus C <= 240pF. External parallel pull-ups require recalculation.

Rev A.1 J502: pin1=GND, pin2=3V3, pin3=SDA, pin4=SCL (Qwiic/STEMMA QT order). Earlier Rev A differs.

duck-robot

Sheet: /
File: imu_tof.kicad_sch

Title: BMI088 + ToF on shared I2C5

Size: A3	Date: 2026-10-28	**Rev: A.1 design under review**
KiCad E.D.A. 10.0.7		Id: 1/1