
3.3V GPIO only. Pin 8/10 UART2 also used by boot console: disable console before servo bus operation.

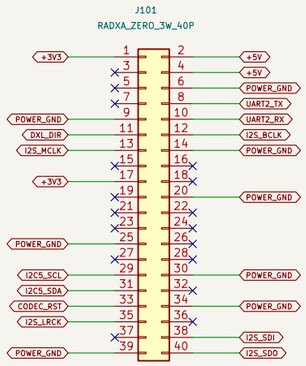

I2C5: pins 29/31. I2S3: 12/13/35/38/40. SPI3: 19/21/23/24. No EEPROM.

Pin33 GPIO3_C3 -> CODEC_RST. Assert low after supplies stabilize; release high before codec initialization.

duck-robot

Sheet: /
File: radxa_40p.kicad_sch

Title: Radxa ZERO 3W – 40-pin interface / 3.3V logic

Size: A3	Date: 2026-10-28	**Rev: A schematic draft**
KiCad E.D.A. 10.0.7		Id: 1/1