
Chip Multilayer Ceramic Capacitor

Electrical Characteristics Data

Murata Global Part No.	Chip Size Code (mm/inch)	Temp. Chara.	Cap.Value	Cap.Tol	Rated Volt.	Durability (%Rated Volt.)
GRM32ER71E226KE15	3225M/1210	X7R	22μF	±10%	25Vdc	150%

1. Dimension

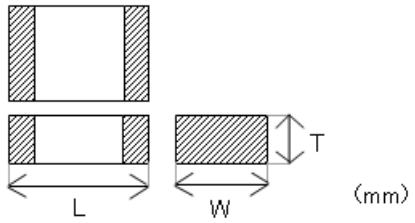


L	W	T
3.2±0.3	2.5±0.2	2.5±0.2

2. Capacitance, D.F. and I.R.

	Specifications	Measuring condition
Capacitance	19.8μF to 24.2μF	120Hz / 0.5Vrms
D.F.	0.1(max.)	120Hz / 0.5Vrms
I.R.	2.27 Mohm(min.)	25.0V, 60s


3. Impedance/ESR-Frequency

Equipment:Impedance/Network Analyzer

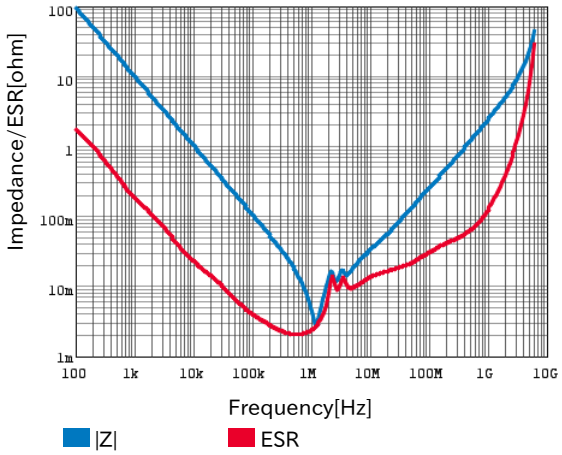


4. Capacitance-DC Bias Characteristics

120Hz / 0.5Vrms Equipment:LCR Meter

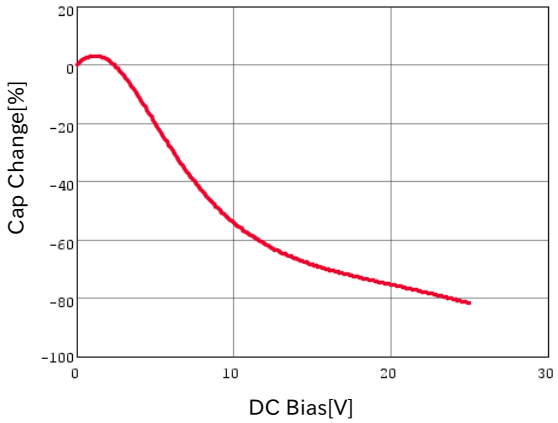


5. Capacitance-AC Voltage Characteristics

120Hz Equipment:LCR Meter

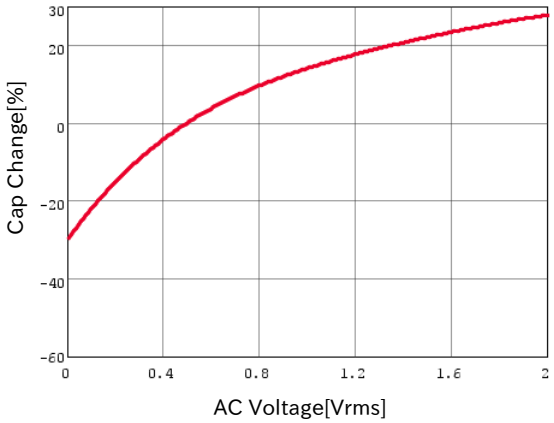


6. Capacitance-Temp. Characteristics

120Hz / 0.5Vrms Equipment:LCR Meter

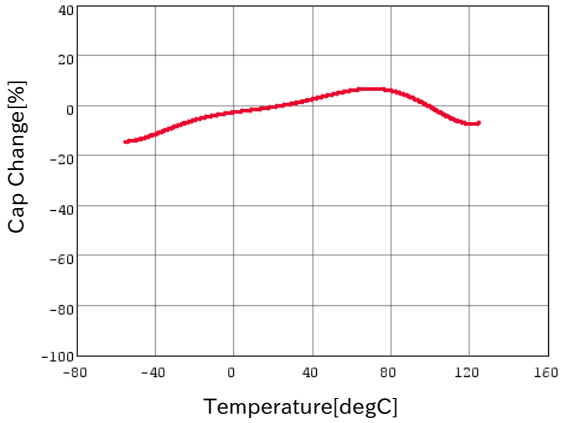

7. Temperature Rise-Ripple Current

Equipment:Temperature Rise - Ripple Current Measurement system

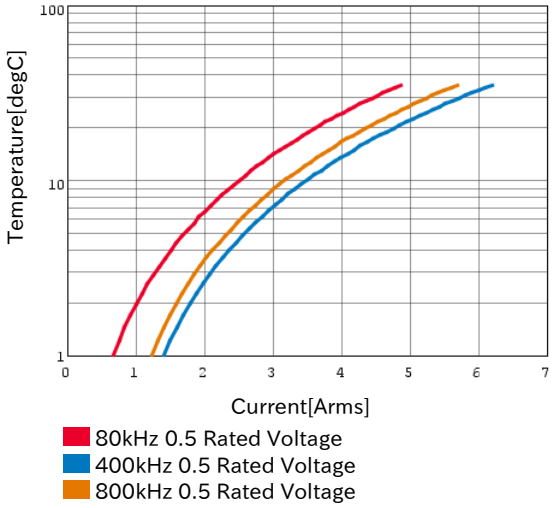

This PDF has only typical specifications.
Therefore, please approve our product specification
before ordering. Product specifications in this PDF are as of Nov. 2026.
They are subject to change or our products in it may be discontinued without advance notice.

Click here to visit Murata WEB site.