

Department of Electrical and Computer Engineering

University of Colorado at Boulder

ECEN5833 - Low Power Embedded Design Techniques



# Fall 2024, ECEN 5833

## Course Project Report

[GITHUB Project](#)  
[GITHUB Code link](#)

Submitted by  
Parth Thakkar  
Anagha Aditya  
Akash Karoshi

Submitted on  
September 24, 2024

# Contents

<b>List of Figures</b>	<b>2</b>
<b>List of Tables</b>	<b>2</b>
<b>1 Project Proposal</b>	<b>3</b>
1.1 Project Rationale and Goals . . . . .	3
1.1.1 Project Rationale . . . . .	3
1.1.2 Project Goals . . . . .	3
1.1.3 Unique Features . . . . .	4
1.1.4 Expected Outcomes . . . . .	4
1.2 Existing Products and Ideas from products . . . . .	4
1.3 High Level Requirements . . . . .	5
1.3.1 General Requirements . . . . .	5
1.4 Keyboard Layout and Design . . . . .	6
1.4.1 Main Board Key Layout . . . . .	6
1.5 Secondary Module Key Layout . . . . .	7
1.6 Challenges and Considerations . . . . .	7
<b>2 Project Update: Week 1</b>	<b>8</b>
2.1 Technical Considerations . . . . .	8
2.1.1 Functional hardware block diagram . . . . .	8
2.2 Wireless Communication and Software Architecture . . . . .	14
2.2.1 HID Profile Characteristics . . . . .	14
2.2.2 Software Architecture . . . . .	14
2.3 Project Management . . . . .	15
2.4 Energy Analysis and Power Management . . . . .	15
<b>3 Project Update: Week 2</b>	<b>17</b>
3.1 Selection Criteria . . . . .	17
3.1.1 Chosen Components . . . . .	17
3.2 Justification for Each Component . . . . .	18
3.2.1 EFR32BG13 Microcontroller . . . . .	18
3.2.2 TCA6408A I/O Expander . . . . .	18
3.2.3 Waveshare E-ink Display . . . . .	18
3.2.4 TPS22919 Load Switch . . . . .	18
3.2.5 BQ25570 Power Management IC . . . . .	18
3.2.6 SI7021 Temperature and Humidity Sensor . . . . .	19
3.2.7 Solar Panel (SM141K06L) . . . . .	19
3.2.8 Battery (1000mAh) . . . . .	19
<b>4 Energy Analysis</b>	<b>19</b>
4.1 Overall Energy Efficiency . . . . .	19
4.2 Battery and Power Management . . . . .	20
4.2.1 Power Management IC (PMIC) Selection . . . . .	20
4.2.2 Energy Storage Element Selection . . . . .	21
4.3 Energy Requirements Analysis . . . . .	21
4.3.1 Unregulated Supply Performance . . . . .	21
4.3.2 Peak and Average Current Use Cases . . . . .	21
4.3.3 Total Energy Required Between Charging . . . . .	22
4.3.4 Recharge Time Calculation . . . . .	22
4.4 Supercapacitor vs Battery Comparison: Mathematical Analysis . . . . .	22
4.4.1 Energy Storage . . . . .	22
4.4.2 Power Density . . . . .	22

4.4.3	Current Handling . . . . .	23
4.4.4	Self-Discharge . . . . .	23
4.4.5	Charging Time . . . . .	23
4.4.6	Conclusion . . . . .	23
4.5	PCB Design Progress . . . . .	24
4.5.1	Footprint Generation . . . . .	24
4.5.2	Power Supply Considerations . . . . .	24
4.6	Mechanical Design . . . . .	25
4.6.1	Dimensions . . . . .	25
4.6.2	Material . . . . .	25
4.6.3	Operating Conditions . . . . .	25
4.7	Project Progress and Future Plans . . . . .	25
4.7.1	Recent Updates . . . . .	25
4.7.2	Upcoming Tasks . . . . .	26

## List of Figures

1	Split Keyboard without display(Wired) . . . . .	4
2	Keyboard which is expensive and have a Display . . . . .	5
3	Conceptual Design of The Insane Keyboard . . . . .	5
4	Hardware block diagram . . . . .	8
5	Normal Matrix for no key roll over . . . . .	9
6	Decoding wrong button press . . . . .	10
7	N-Key Rollover . . . . .	11
8	Multiple keys pressed . . . . .	12
9	Software Block Diagram . . . . .	14
10	Project Timeline . . . . .	15
11	Kanban Board for Task Management . . . . .	15
12	Energy Calculations . . . . .	16
13	Component Footprints . . . . .	24
14	Voltage Range . . . . .	25
15	Kanban for update 2 . . . . .	25
16	Design a Case and PCB . . . . .	26

## List of Tables

1	Component List for The Insane Keyboard with DigiKey Part Numbers . . . . .	17
2	Component Current Requirements . . . . .	21

*\*PDF is clickable*

# 1 Project Proposal

## Team name:

Low Self Esteem Team

## Student Name:

Parth Rajeshkumar Thakkar

ParthRajeshkumar.Thakkar@colorado.edu

Anagha Aditya

Anagha.Aditya@colorado.edu

Akash Karoshi

Akash.Karoshi@colorado.edu

## 1.1 Project Rationale and Goals

For the ECEN 5833 Low Power Embedded System Design course, our team is developing an advanced mechanical keyboard called "The Insane Keyboard". This project aims to create a high-performance input device that combines ergonomic design, customization options, and some cool features.

### 1.1.1 Project Rationale

Our analysis of the mechanical keyboard market revealed several issues:

- Ergonomic keyboards often lack additional features or are expensive
- Many feature-rich keyboards are wired, limiting mobility
- Affordable keyboards offer limited customization
- Few keyboards combine ergonomic design, wireless capability, programmable lighting, and smart functions
- Keyboards with displays or extra features often have poor power efficiency

### 1.1.2 Project Goals

We aim to create a mechanical keyboard with the following features:

- Split ergonomic design to reduce physical strain
- Wireless connectivity using Bluetooth Low Energy.
- Programmable RGB lighting with addressable LEDs
- Hot-swappable key switches for easy customization
- Low-power E-ink display for additional information
- Multi-device compatibility
- Advanced power management techniques
- Environment temperature and pressure sensing.
- Real Time clock module for timer, stopwatch and time features.
- Potential energy harvesting from typing (Yet to be seen)
- Open-source firmware for extensive customization
- Cost-effective design for market accessibility

### 1.1.3 Unique Features

“The Insane Keyboard” has unique features like:

- Integration of multiple desirable features in one device
- Optimized power management for extended use
- Potential energy harvesting from typing motions
- Open-source firmware for community-driven development
- Adaptable design for future upgrades

### 1.1.4 Expected Outcomes

Upon completion, this project could:

- Improve ergonomics in daily computer use
- Advance keyboard power management and energy harvesting
- Foster a community of keyboard enthusiasts and developers
- Demonstrate practical applications of low-power embedded design

## 1.2 Existing Products and Ideas from products



Figure 1: Split Keyboard without display(Wired)



Figure 2: Keyboard which is expensive and have a Display

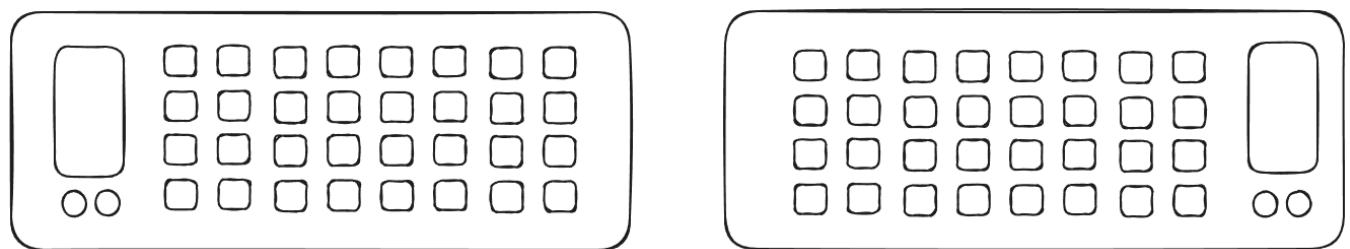


Figure 3: Conceptual Design of The Insane Keyboard

### 1.3 High Level Requirements

#### 1.3.1 General Requirements

- Two EFR32BG13 boards (one per module)
- Should be Ergonomic
- 75% keyboard layout (TKL layout)
- IO expander for each MCU
- Temperature sensor
- Pressure sensor

- Real-Time Clock (RTC)
- Connectivity to three host devices
- Computer software for LED customization
- Individually customizable LEDs
- E-ink display on each module
- Energy harvesting on each module
- Charging circuit with Type-C connector
- Charging indicator
- Battery indicator
- Minimum 6-key rollover
- HID protocol communication between modules
- Smart power states (active, idle, deep sleep)
- RTOS: FreeRTOS (Yet to be decide)
- PWM-based RGB LED control
- Hot-swappable key switches
- Time, date, battery status, current profile, custom graphics
- Spotify integration for music control and now-playing information(yet to be seen)

## 1.4 Keyboard Layout and Design

### 1.4.1 Main Board Key Layout

Function Row						
ESC ~ `	F1 1 !	F2 2 @	F3 3 #	F4 4 \$	F5 5 %	F6 6 ^
QWERTY Row						
TAB	Q	W	E	R	T	
Home Row						
CAPS	A	S	D	F	G	
Bottom Row						
SHIFT	Z	X	C	V	B	
Modifier Row						
CTRL	OPT	WIN/MAC	ALT			SPACE

### Additional Inputs:

- 2 × Rotary Encoders (Knobs)
- 3 × Extra Buttons

### Additional Components

- E-Ink display
- Battery
- Battery Charging and Power Management Unit (Not in Secondary module)
- Temperature Sensor (Not in Secondary module)
- Real time Clock (Not in Secondary module)

## 1.5 Secondary Module Key Layout

Function Row								
F7	F8	F9	F10	F11	F12	BKSP	HOME	
QWERTY Row								
Y	U	I	P	{[	}]	—\	DEL	
Home Row								
H	J	K	L	; :	” ’	ENTER	PGUP	
Bottom Row								
N	M	, i	. i	/ ?	SHIFT	↑	PGDN	
Modifier Row								
	SPACE	ALT/MAC	FN	CTRL	←	↓	→	

### Additional Inputs:

- 2 × Rotary Encoders (Knobs)
- 3 × Extra Buttons

### Additional Components:

- E-Ink display
- Battery
- Power Management Unit

## 1.6 Challenges and Considerations

- Managing state machines with complex software like e-ink display drivers
- Integrating drivers with BLE firmware
- Implementing RTC driver and temperature control driver
- Ensuring reliable wireless connectivity
- Implementing multi-host communication and switching
- Developing HID profile in BLE stack
- Implementing anti-ghosting techniques
- Optimizing keyboard scan rate for low latency
- Achieving N-key rollover or 6-key rollover

## 2 Project Update: Week 1

### 2.1 Technical Considerations

#### 2.1.1 Functional hardware block diagram

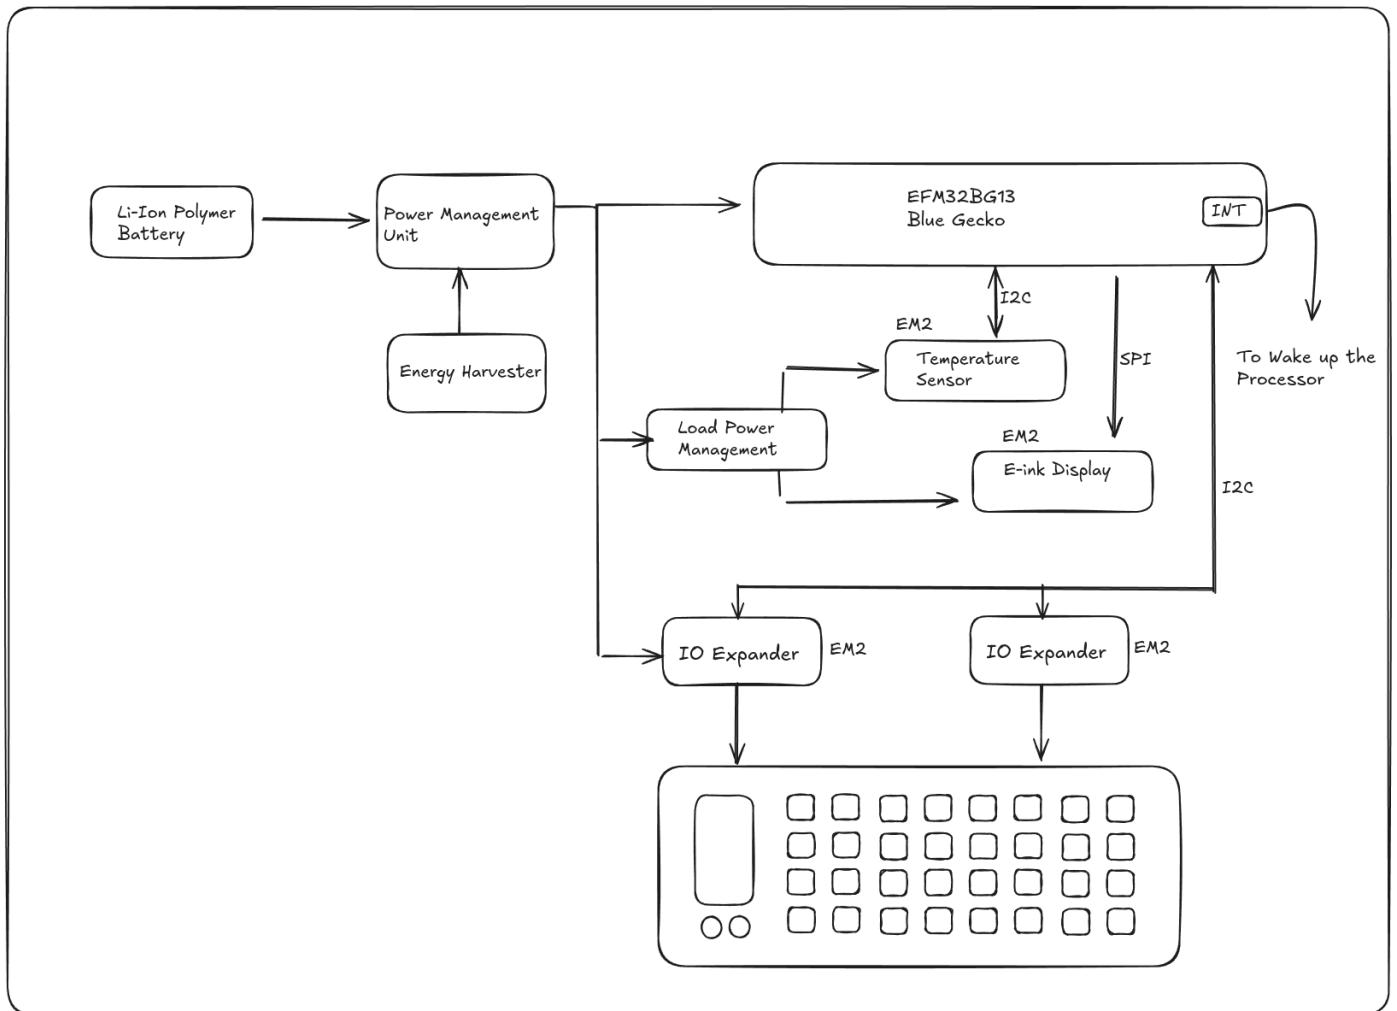


Figure 4: Hardware block diagram

0-Key Rollover (Normal Matrix)


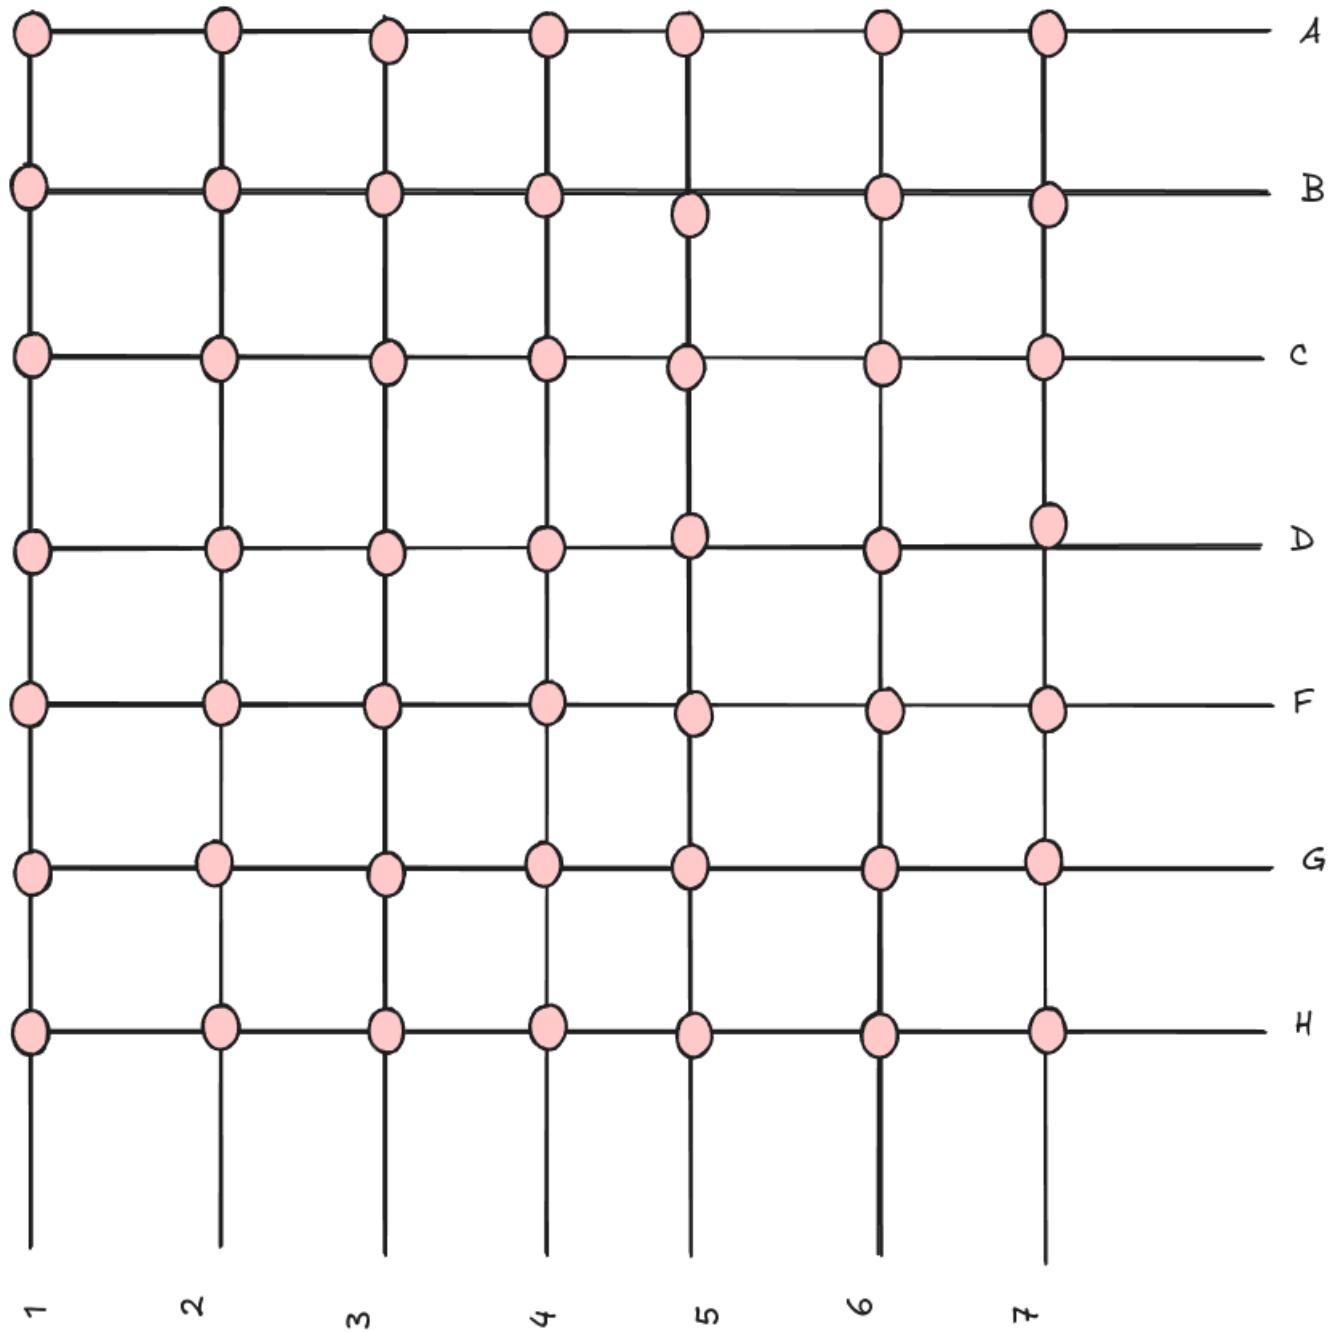


Figure 5: Normal Matrix for no key roll over

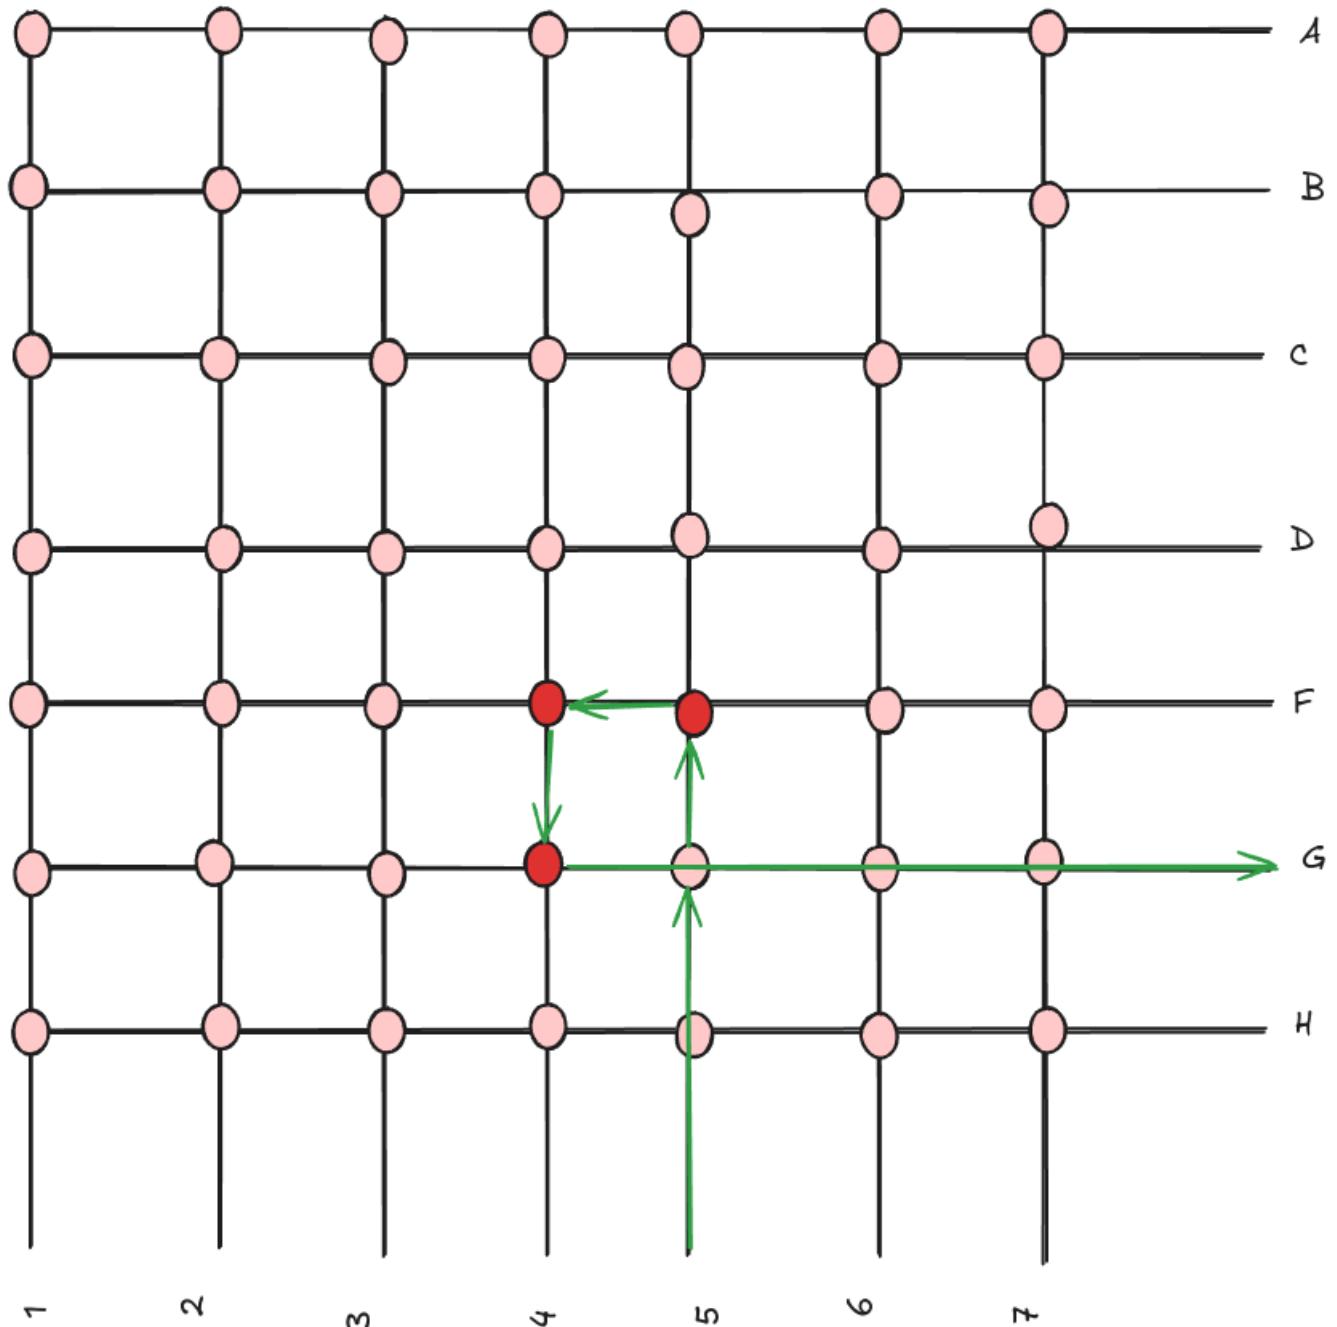

**4F, 4G, 5G 5F**

Figure 6: Decoding wrong button press

N-Key Rollover feature with Diodes


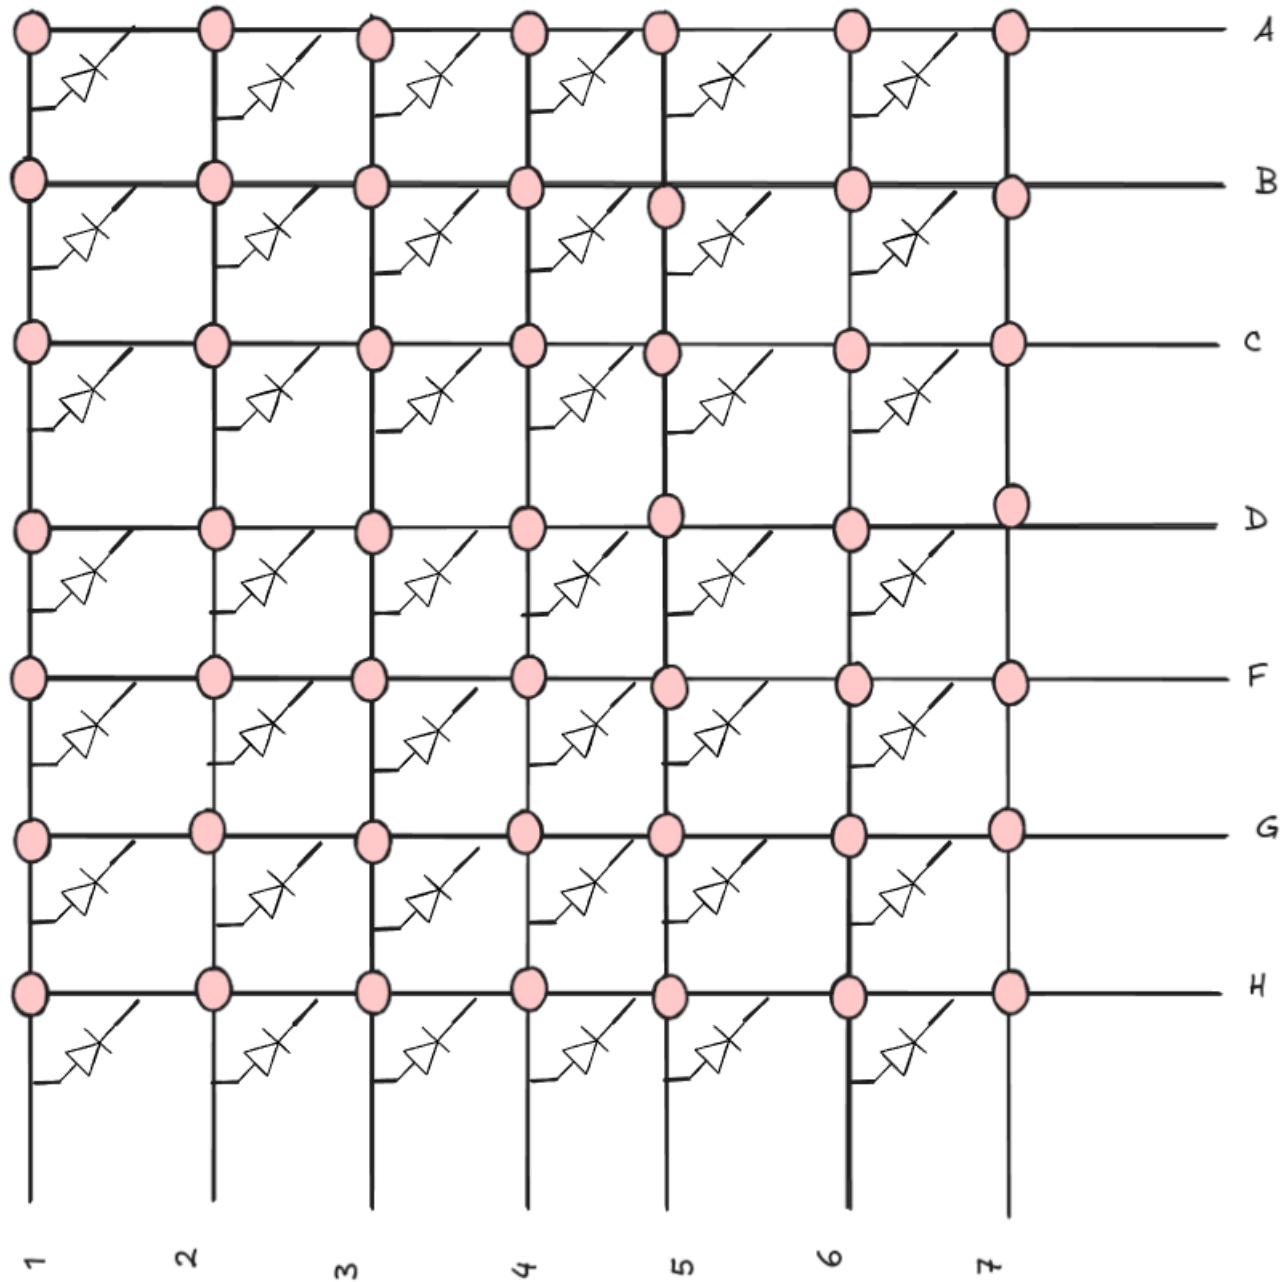


Figure 7: N-Key Rollover

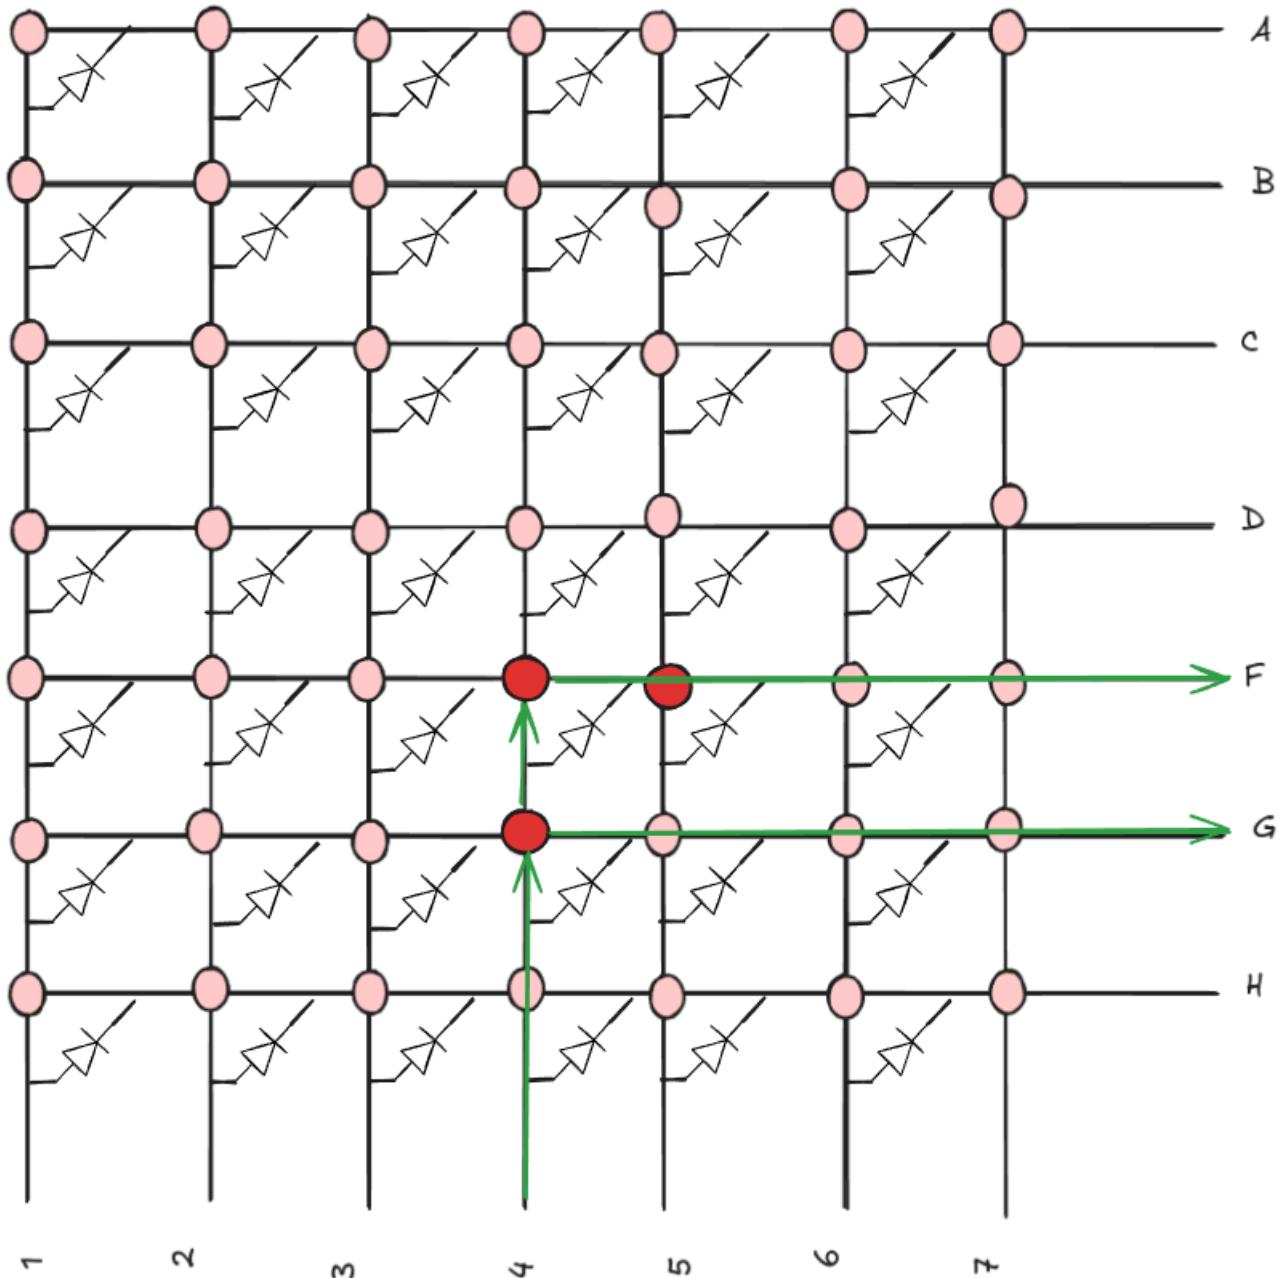

**4F, 4G, 5F**

Figure 8: Multiple keys pressed

The keyboard uses a matrix layout, which is an efficient way to manage multiple key inputs with fewer microcontroller pins. In the images, we see an 8x7 matrix (rows A-H, columns 1-7).

Scanning Process:

The microcontroller scans this matrix by activating one column at a time and reading the state of all rows. When a key is pressed, it connects a row and column, which the microcontroller detects.

#### **Ghosting and Its Prevention:**

Ghosting is a problem in simple matrix designs where pressing multiple keys can lead to false key registrations. Example (Image 1):

If keys at 4F, 4G, and 5F are pressed simultaneously, the matrix might also falsely register 5G.

### **Solution (Images 2 and 3):**

Diodes are added to each key switch. These diodes allow current to flow in only one direction, preventing the "phantom" current paths that cause ghosting. With diodes, when 4F, 4G, and 5F are pressed, 5G is not falsely registered.

### **N-Key Rollover (NKRO):**

NKRO allows the keyboard to correctly register any number of simultaneous key presses.

Implementation:

Each key gets its own diode, ensuring independent registration. The microcontroller scans the entire matrix rapidly, detecting all pressed keys without conflicts.

### **Hardware Components:**

#### **Central Microcontroller:**

EFM32BG13 Blue Gecko: This MCU manages all keyboard functions and interfaces with other components.

#### **Sensors:**

TMP117: Measures temperature, humidity, and pressure, potentially for environmental adaptation or user information.

DS3231 RTC Module: Provides accurate timekeeping, useful for time-based functions or logging.

#### **Display:**

E-Ink Display (800x600, 4.3inch): Offers a low-power way to show keyboard status, settings, or other information.

#### **Expansion:**

MCP23017 IO Expander: Increases the number of available pins for the key matrix, allowing for more keys or other inputs.

#### **Power Management:**

Power Management Unit: Manages power distribution and consumption.

Li-Ion Polymer Battery: Provides portable power.

Energy Harvester: Potentially extends battery life by capturing ambient energy.

#### **Key Switches and Caps:**

Gateron G Black Pro 2.0 switches: Known for smooth linear action. Cherry MX key caps: Industry-standard keycaps for customization.

#### **Additional Inputs:**

Rotary encoders: Provide alternative input methods, possibly for volume control or menu navigation.

#### **PCB Design:**

4-layer PCB: Allows for more complex routing and better signal integrity.

Two versions:

Main Module with all sensors and charging capabilities.

Simplified Secondary Module without temperature, humidity, RTC, and LiPo charger.

## 2.2 Wireless Communication and Software Architecture

We have made significant progress in defining our wireless communication protocol and software architecture:

### 2.2.1 HID Profile Characteristics

We've detailed the HID (Human Interface Device) profile for our keyboard, including:

- Keyboard Input Report: 8-byte structure for key presses
- Keyboard Output Report: 1-byte for LED status
- Protocol Mode: Supports both Boot and Report protocols
- HID Information and Control Point: For device management
- Report Map: Defines input/output report formats

### 2.2.2 Software Architecture

We've developed a functional software block diagram (Figure 9) that outlines the interaction between various software components, including the BLE stack, keyboard matrix scanning, and power management modules.

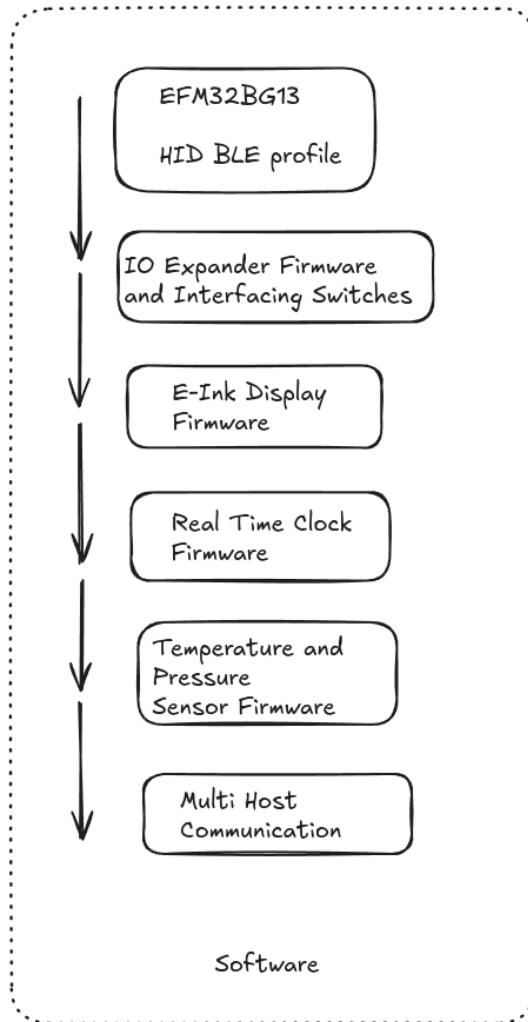


Figure 9: Software Block Diagram

## 2.3 Project Management

We've set up a robust project management system:

1. Timeline: We've created a detailed project timeline (Figure 10) to track our progress and milestones.
2. Version Control: Our project is now on GitHub, allowing for better collaboration and code management.
  - Project Board: [GitHub Project](#)
  - Code Repository: [GitHub Code Repository](#)
3. Task Tracking: We're using a Kanban board (Figure 11) to manage our tasks and workflow efficiently.

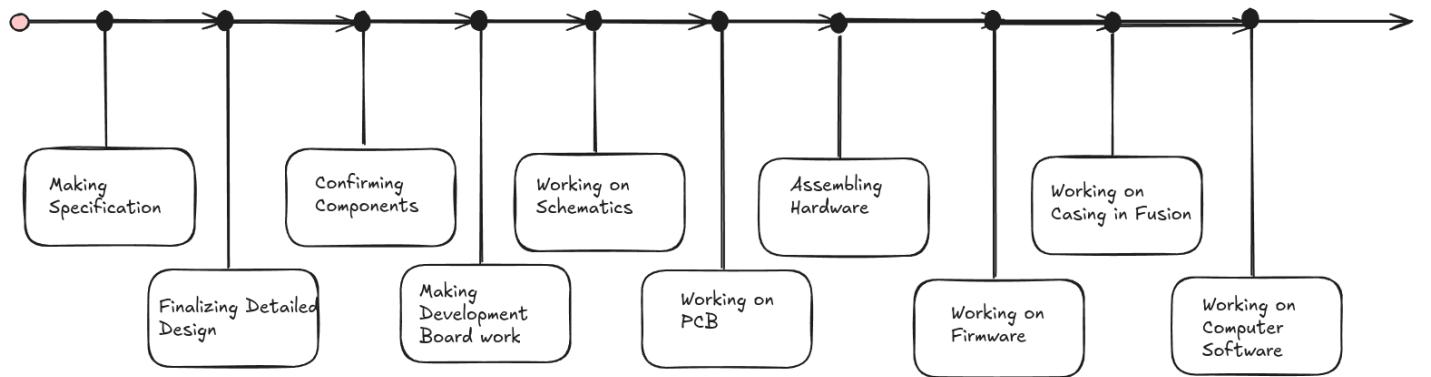


Figure 10: Project Timeline

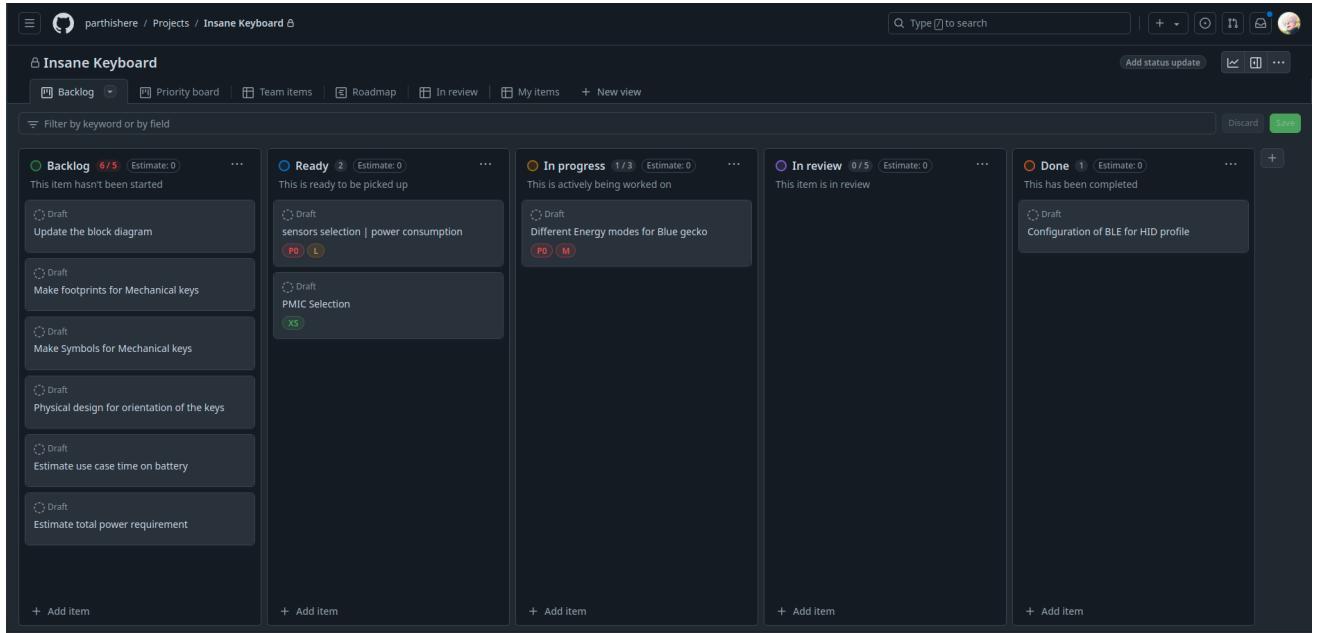


Figure 11: Kanban Board for Task Management

## 2.4 Energy Analysis and Power Management

We've conducted initial energy mode analysis and made decisions on power management:

1. Energy Calculations: We've performed preliminary calculations (Figure 12) to estimate power consumption in various modes.

2. Energy Harvesting: We've chosen to incorporate a solar panel for energy harvesting, enhancing the keyboard's power autonomy.
3. Interface Selections:
  - Display: SPI interface chosen for faster data transfer
  - Temperature Sensor and IO Expander: I2C interface for power efficiency
4. Load Power Management: Implemented a load switch to disable the temperature sensor and display when not in use, reducing standby power consumption.
5. Multiple Energy Modes: Our design now supports various energy modes to optimize power usage based on the keyboard's current state.

Component	Description			Current	Start up	Active	Sleep	Deep Sleep
<b>BlueGecko</b>	EM3	RTCC	Using ULFRCO	0.000003		1	1	1
	EM2		Using PLFRCO	0.0000033		0	1	
	EM0		38.4MHz clock	0.0049152		1		
<b>Power Supply</b>				0.0000007	1	1	1	1
<b>Eink display</b>				0.03		1	1	
RefreshPower				0.000017		1	1	
Standby								
Quiesent Current								
<b>Load Switch x2</b>				0.00003	1	1	1	1
Quiescent				0.2 OHMS				
<b>Si7021</b>								
Standby				0.00000006	1	1	1	1
Startup				0.004	1			
I2C transaction				0.004				
Humidity and temp reading				0.00018				
Average Current during reading				0.0008		1	1	
<b>IO expander</b>								
<b>TCA6408A</b>				0.0000015	1	1	1	1
				Current(A)	0.00403226	0.0308493	0.030849	3.23E-05
				Power(W)	0.01330646	0.1018026	0.101803	0.000106
				Time (s)	105	86400	86400	403200
				%Time	0.00018226	0.1499727	0.149973	0.699872
				Energy(J) = Power x %Time	2.4252E-06	0.0152676	0.015268	7.45E-05
				Average power(W)	0.03061213			
				Energy required for 24 hour(J)	2644.88832			
				Min capacitance (F)	0.38265167			
				Energy needs of the device and application (mins)	1.9047619			

Figure 12: Energy Calculations

### 3 Project Update: Week 2

#### 3.1 Selection Criteria

We chose components based on:

1. Availability: Multiple suppliers to ensure steady supply.
2. Power efficiency: Low standby and active currents, multiple power-saving modes.
3. Documentation: Comprehensive datasheets, application notes, and support.
4. Sleep modes: Various low-power states with quick wake-up capabilities.
5. Temperature range: Suitable for varied environments.
6. EMC/EMI: Built-in interference mitigation.
7. Ongevity: Components not near end-of-life.
8. Cost: Balanced features and performance with price.

##### 3.1.1 Chosen Components

Component	Quantity	Function	Interface	DigiKey Part Number
EFR32BG13	2	Microcontroller	-	<a href="#">EFR32BG13P632F512GM32-D-ND</a>
TCA6408A	2	IO Expander	I2C	<a href="#">296-24328-1-ND</a>
Waveshare E-ink Display	1	Display	SPI	<a href="#">External Link</a>
TPS22919	1	Load Switch	-	<a href="#">296-53421-1-ND</a>
BQ25570	2	PMIC	-	<a href="#">296-37014-1-ND</a>
Battery 1000mAh	2	Energy Storage	-	<a href="#">1939-BL1200P4054481S1PCAC-ND</a>
SI7021	1	Temperature and Humidity Sensor	I2C	<a href="#">336-4379-1-ND</a>
Schottky Diodes	1	Power Management	-	Have not decided yet
Gateron G Black Pro 2.0	68	Key Switches	-	<a href="#">External link</a>
Mechanical Key Hotswap	68	Hotswap Sockets	-	<a href="#">External Link</a>
Cherry MX Key Caps	68	Key Caps	-	<a href="#">External link</a>
Rotary Encoders	2	Input Device	-	<a href="#">PEC12R-4222F-S0024-ND</a>
Solar Panel SM141K06L	1	Energy Harvesting	-	<a href="#">SM141K06L-ND</a>

Table 1: Component List for The Insane Keyboard with DigiKey Part Numbers

### 3.2 Justification for Each Component

#### 3.2.1 EFR32BG13 Microcontroller

- Bluetooth 5.0 capable
- Energy-efficient: 60  $\mu$ A/MHz at 40 MHz
- Five power modes: 1.4  $\mu$ A in deep sleep, 20 nA in shutoff
- Low-energy peripherals for efficient keyboard scanning
- Comprehensive development tools

#### 3.2.2 TCA6408A I/O Expander

- 0.1  $\mu$ A standby current
- 400 kHz I<sub>2</sub>C interface for quick I/O updates
- 8 programmable I/O pins, each sinking 25 mA
- Interrupt output for event-driven operation
- Chosen over PCA9538 and SX1509 for lower power and simpler programming

#### 3.2.3 Waveshare E-ink Display

- Power used only during updates
- Enables dynamic key labeling
- SPI interface for fast updates
- 200x200 pixel resolution
- Preferred over OLED for lower power consumption

#### 3.2.4 TPS22919 Load Switch

- 12 nA quiescent current
- 15  $\mu$ s response time
- 2A current capacity
- 1.5V to 5.5V input range
- Built-in protection features
- Chosen over TPS22860 and SiP32431 for balanced performance

#### 3.2.5 BQ25570 Power Management IC

- 100 mV to 5.1 V input range
- Integrated Maximum Power Point Tracking
- 488 nA quiescent current
- Built-in boost charger and buck converter
- Programmable voltage thresholds
- Selected over SPV1050 and ADP5090 for solar power optimization

### 3.2.6 SI7021 Temperature and Humidity Sensor

- $\pm 0.4^\circ\text{C}$  and  $\pm 3\%$ RH accuracy
- 150 nA standby current
- I<sub>C</sub> interface
- 3x3 mm package
- 1.9V to 3.6V supply range
- Chosen over HDC1080 and BME280 for accuracy and power efficiency

### 3.2.7 Solar Panel (SM141K06L)

- 42mm x 23mm size
- 184 mW maximum output
- 3.35V at maximum power point

### 3.2.8 Battery (1000mAh)

- Size: 2.09" x 1.89" x 0.16"
- 525mA charge current, 1.05A discharge current
- 3.7V nominal voltage

## 4 Energy Analysis

### 4.1 Overall Energy Efficiency

We have made the following assumption for our energy calculations: The keyboard will be operational 24/7, with the following daily usage pattern: 8 hours of active use per day

- 4 hours in active mode
- 4 hours in sleep mode

16 hours in deep sleep mode

**Energy Consumption Breakdown** Based on our calculations, the energy consumption for different operational states is as follows:

- Start-up: 0.000101970 W
- Active: 0.0166035556 W
- Transmit: 0.129140610 W
- Sleep: 0.000122760 W
- Deep Sleep: 0.00011187 W

**Average Power Consumption** The weighted average power consumption, considering the time spent in each mode, is calculated to be:

$$P_{avg} = 0.003976168 \text{ W} \quad (1)$$

This remarkably low average power consumption is achieved through intelligent power management and efficient component selection.

**Daily Energy Requirement** Based on our average power consumption, the total energy required for 24 hours of operation is:

$$E_{daily} = 343.5409345 \text{ J} = 0.095428 \text{ Wh} \quad (2)$$

**Battery Capacity Calculation** For sustained operation over a week, we calculated the required battery capacity:

$$E_{weekly} = 2404.786542 \text{ J} = 0.667996262 \text{ Wh} \text{ Adjusted Energy} = \frac{0.667996262}{0.85 \times 0.8} = 0.982347443 \text{ Wh} \text{ Battery Capacity}$$

This calculation takes into account a battery efficiency of 85% and a maximum depth of discharge of 80% to ensure long-term battery health.

**Energy Harvesting Efficiency** Our solar panel and power management system are designed to harvest energy efficiently even in low-light indoor conditions. The BQ25570 PMIC, with its Maximum Power Point Tracking (MPPT) capability, ensures optimal energy extraction from the solar panel.

### Power Budget Analysis

- Average current draw: 1.07464 mA
- Peak current (during transmission): 39.0296560 mA
- Quiescent current (deep sleep): 33.9 uA

The significant difference between peak and quiescent current underscores the effectiveness of our power-saving modes.

**Capacitor Sizing** To support peak current demands, we calculated a minimum capacitance of:

$$C_{min} = 0.049702103 \text{ F} \quad (3)$$

This capacitance ensures stable operation during high-current events while allowing the solar harvesting system to replenish energy during low-power periods. With an average power consumption of just 3.976 mW and a weekly energy requirement of less than 1 Wh, our keyboard is well-positioned for long-term, self-sustained operation using solar energy harvesting, even in typical indoor environments.

## 4.2 Battery and Power Management

### 4.2.1 Power Management IC (PMIC) Selection

We have selected the BQ25570 PMIC as it provides the necessary features for efficient solar harvesting and battery management. Key features include:

- Wide input range: 100 mV to 5.1 V, ideal for solar harvesting
- Integrated Maximum Power Point Tracking (MPPT)
- Ultra-low quiescent current: 488 nA typical
- Integrated boost charger and buck converter
- Programmable voltage thresholds for optimal battery management

#### 4.2.2 Energy Storage Element Selection

Choice: SM141K06L Solar panel

- Power Output: 184 mW
- Voltage at Maximum Power Point (Vmpp): 3.35 V
- Current at Maximum Power Point (Impp): 55.1 mA
- Open Circuit Voltage (Voc): 4.15 V
- Short Circuit Current (Isc): 58.6 mA
- Size: 42.00mm x 23.00mm x 2.10mm (1.654" x 0.906" x 0.083")

Reasons for selection:

- Significantly higher power output compared to previous options
- Larger but still manageable size for a keyboard design
- Higher voltage output, beneficial for power management
- Good power-to-size ratio

Energy Calculations (assuming 8 hours of typical indoor lighting per day):

$$\text{Energy per day} = \text{Power} * \text{Time} \quad \text{Energy per day} = 184\text{mW} * 8\text{hours} \quad \boxed{\text{Energy per day} = 1,472\text{mWh}}$$

Power Density:

$$\text{Power Density} = \frac{\text{Power Output}}{\text{Area}} = \frac{184 \text{ mW}}{42 \text{ mm} \times 23 \text{ mm}} = \boxed{0.191 \text{ mW/mm}^2}$$

### 4.3 Energy Requirements Analysis

#### 4.3.1 Unregulated Supply Performance

Constant Power Case:

- Regulated power supply providing power for microcontroller and sensors which require input voltage kept in limited range.
- As voltage out of energy source drops from Vworking to Vmin, current increases to keep power through supply constant.

#### 4.3.2 Peak and Average Current Use Cases

We have analyzed the current requirements for each component in our system under both peak and average use conditions. Table 2 summarizes these findings:

Component	Peak Current (A)	Average Current (A)
Temperature Sensor	0.004	0.00071424
E-ink Display	0.008	8.05558E-05
MCU	0.0393152	0.000115536
PMIC	0.0000009	0.0000009
Load Switch	0.0000201	0.0000201
IO Expander	0.0000015	0.0000015
<b>Total</b>	<b>0.0513377</b>	<b>0.000932832</b>

Table 2: Component Current Requirements

### 4.3.3 Total Energy Required Between Charging

Given:

- Battery Capacity: 1000 mAh
- Assumed Battery Voltage: 3.7 V (typical for Li-ion)
- Daily Energy Consumption: 343.5409345 J

Calculations:

#### 1. Convert Battery Capacity to Joules:

$$\text{Energy (J)} = \text{Capacity (mAh)} \times \text{Voltage (V)} \times 3.6 = 1000 \times 3.7 \times 3.6 = 13,320 \text{ J} \quad (4)$$

#### 2. Calculate Number of Days:

$$\text{Days} = \frac{\text{Total battery energy}}{\text{Daily energy consumption}} = \frac{13,320 \text{ J}}{343 \text{ J/day}} \approx 38.83 \text{ days} \quad (5)$$

#### 3. Convert to Weeks:

$$38.83 \text{ days} \approx 5.55 \text{ weeks} \quad (6)$$

### 4.3.4 Recharge Time Calculation

We are using a 1000mAh battery with a 0.5C charging rate:

- Theoretical charging current: 0.5C = 500mA
- BQ25570 PMIC maximum charging current: 230mA (typical)

Since the PMIC can't provide 500mA, it will charge at its maximum rate of 230mA.

$$\text{Estimated charging time} = \frac{\text{Battery Capacity}}{\text{Charging Current}} = \frac{1000\text{mAh}}{230\text{mA}} \approx 4.35 \text{ hours} \quad (7)$$

## 4.4 Supercapacitor vs Battery Comparison: Mathematical Analysis

We'll compare a 4F Vishay supercapacitor with our 1000mAh Li-ion battery, focusing on quantitative aspects.

### 4.4.1 Energy Storage

**Battery:** Energy stored in the battery:

$$E_{\text{battery}} = \text{Capacity} \times \text{Voltage} = 1000 \text{ mAh} \times 3.7 \text{ V} = 3700 \text{ mWh} = 13320 \text{ J} \quad (8)$$

**Supercapacitor:** Energy stored in the supercapacitor (assuming 2.7V max voltage):

$$E_{\text{supercap}} = \frac{1}{2} CV^2 = \frac{1}{2} \times 4 \text{ F} \times (2.7 \text{ V})^2 = 14.58 \text{ J} = 0.00405 \text{ Wh} \quad (9)$$

### 4.4.2 Power Density

**Battery:** Assuming a discharge time of 1 hour at maximum current (1.05A):

$$P_{\text{battery}} = 3.7 \text{ V} \times 1.05 \text{ A} = 3.885 \text{ W} \quad (10)$$

**Supercapacitor:** Assuming a discharge time of 1 second (typical for supercapacitors):

$$P_{\text{supercap}} = \frac{E_{\text{supercap}}}{\text{time}} = \frac{14.58 \text{ J}}{1 \text{ s}} = 14.58 \text{ W} \quad (11)$$

#### 4.4.3 Current Handling

**Battery:** Maximum discharge current: 1.05A

**Supercapacitor:** Maximum current can be calculated using the ESR (Equivalent Series Resistance). Assuming an ESR of 0.1 Ohm:

$$I_{\max, \text{supercap}} = \frac{V_{\max}}{ESR} = \frac{2.7 \text{ V}}{0.1 \Omega} = 27 \text{ A} \quad (12)$$

#### 4.4.4 Self-Discharge

**Battery:** Assuming 5% self-discharge per month:

$$E_{\text{loss,battery}} = 0.05 \times 3700 \text{ mWh} = 185 \text{ mWh/month} \quad (13)$$

**Supercapacitor:** Self-discharge in supercapacitors can be modeled as:

$$V(t) = V_0 e^{-t/\tau} \quad (14)$$

Where  $\tau = RC$ , R is the leakage resistance (assume 100 kOhm), and C is 4F:

$$\tau = 100 \text{ k}\Omega \times 4 \text{ F} = 400000 \text{ s} \approx 4.63 \text{ days} \quad (15)$$

After one month (2,592,000 seconds):

$$V(1 \text{ month}) = 2.7 \text{ V} \times e^{-2592000/400000} \approx 0.48 \text{ V} \quad (16)$$

Energy remaining:

$$E_{\text{remaining}} = \frac{1}{2} \times 4 \text{ F} \times (0.48 \text{ V})^2 = 0.4608 \text{ J} \quad (17)$$

Energy lost:

$$E_{\text{loss,supercap}} = 14.58 \text{ J} - 0.4608 \text{ J} = 14.1192 \text{ J} = 0.003922 \text{ Wh/month} \quad (18)$$

#### 4.4.5 Charging Time

**Battery:** With a charging current of 525mA:

$$t_{\text{charge,battery}} = \frac{1000 \text{ mAh}}{525 \text{ mA}} = 1.90 \text{ hours} \quad (19)$$

**Supercapacitor:** Assuming a charging current of 1A:

$$t_{\text{charge,supercap}} = \frac{C \times V}{I} = \frac{4 \text{ F} \times 2.7 \text{ V}}{1 \text{ A}} = 10.8 \text{ seconds} \quad (20)$$

#### 4.4.6 Conclusion

This mathematical analysis confirms our previous conclusions:

- The battery stores  $\frac{3700}{0.00405} \approx 914$  times more energy than the supercapacitor.
- The supercapacitor can deliver  $\frac{14.58}{3.885} \approx 3.75$  times more power in short bursts.
- The supercapacitor can handle much higher peak currents (27A vs 1.05A).
- The battery retains charge much better, losing only 5% per month compared to the supercapacitor's 96.8
- The supercapacitor charges  $\frac{1.90 \times 3600}{10.8} \approx 633$  times faster than the battery.

These calculations support using the battery as the main power source,


## 4.5 PCB Design Progress

We've completed footprint creation for most components, with the following exceptions:


Solar Panel: Recently added, footprint pending  
0603 components: Footprints for resistors and MLCC capacitors still needed

### 4.5.1 Footprint Generation


Footprints:

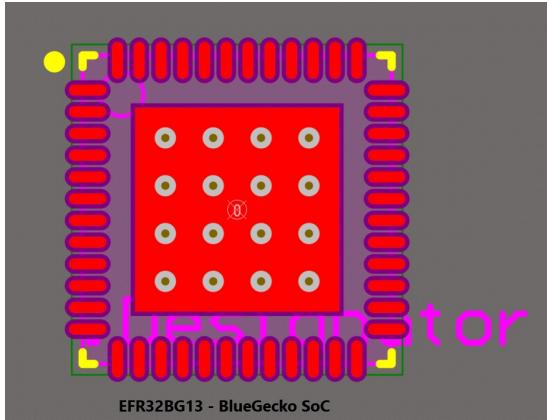


BlueGecko EFR32BG13 QFN48 package

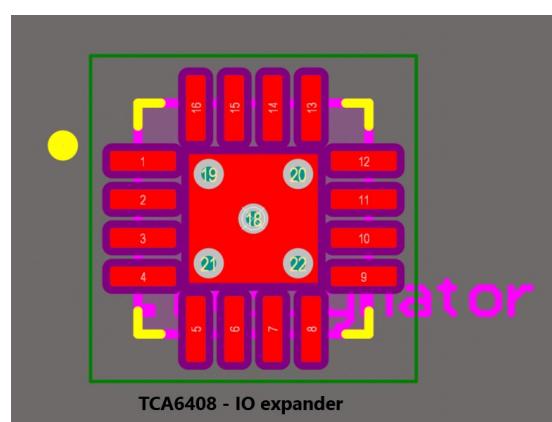


IO expander

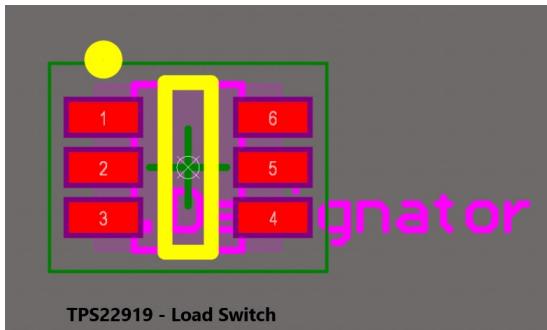


Loadswitch

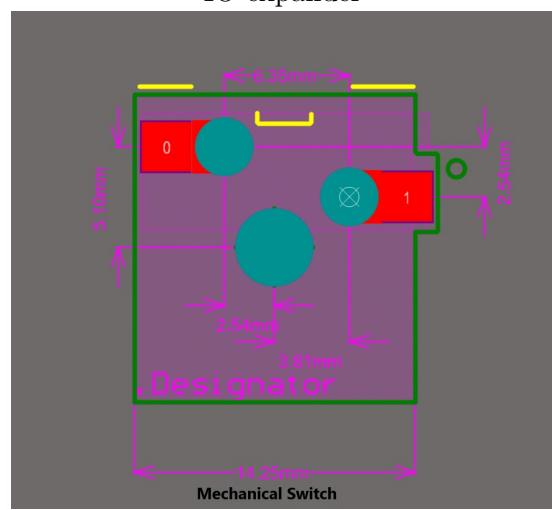

Mechanical switch

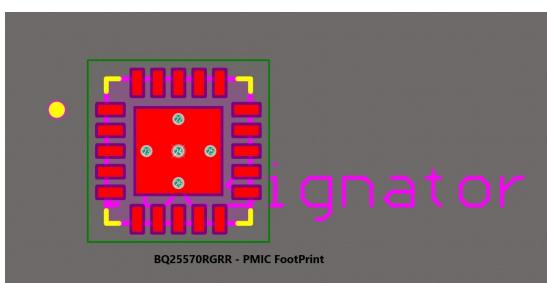

PMIC

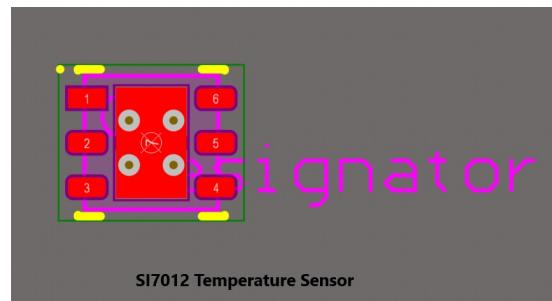

Temperature Sensor

Figure 13: Component Footprints

### 4.5.2 Power Supply Considerations

For components requiring a stable input voltage:

A regulated power supply will be used. As the energy source voltage decreases, current will increase to maintain constant power.

## 4.6 Mechanical Design

### 4.6.1 Dimensions

Left unit: 165mm x 120mm x 35mm

Right unit: 175mm x 120mm x 35mm

### 4.6.2 Material

Carbon fiber-filled Nylon selected for construction

### 4.6.3 Operating Conditions

Temperature range: 0°C to 50°C

Voltage range:

Voltage ranges				
	Min	Typ	Max	Units
BlueGecko	1.8		3.8	V
PMIC	0.1		5.1	V
eInk Display	2.2		3.7	V
Load Switch	1.6		5.5	V
Temperature sensor	1.9		3.6	V
IO Expander	1.65		5.5	V

Figure 14: Voltage Range

## 4.7 Project Progress and Future Plans

### 4.7.1 Recent Updates

- Added solar panel for energy harvesting
- removed Supercapacitor
- Added links to components
- created Libraries

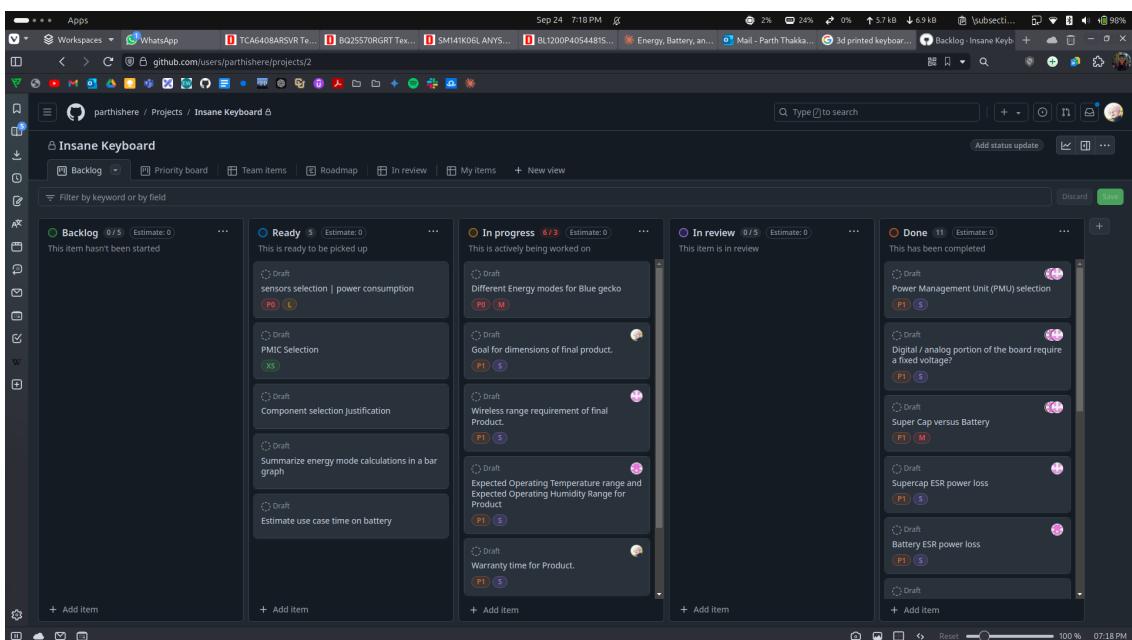


Figure 15: Kanban for update 2

#### 4.7.2 Upcoming Tasks

1. Component Selection:
  - Choose appropriate decoupling capacitors
2. Design Refinement:
  - Optimize key size and spacing for ergonomics
  - Finalize keyboard layout
3. Prototyping Preparation:
  - Design 3D case model using Fusion 360
  - 3D print prototype case



Figure 16: Design a Case and PCB

