

SUNYLON® Polyamide 6 Pellet



台灣化學纖維股份有限公司
FORMOSA CHEMICALS & FIBRE CORPORATION

Grade: **NP40MN** Color code:- (Nature)

Product Description

High Viscosity, Good Mechanical Properties, Oil Resistance, Impact Resistance.

Features

- Extrusion

Application

- CPA/IPA Film

Properties

Typical Property	Test Method	Test Condition	Unit	Value
Relative Viscosity	96% H ₂ SO ₄	25°C	-	4.0
Extractable	-	-	%	<0.6
Moisture content	Karl Fischer	-	ppm	<1000
Specific Gravity	-	23°C	-	1.12-1.14
Mechanical				
Tensile Strength	ASTM D-638	23 °C	kg/cm ²	710
Flexural Strength	ASTM D-790	23 °C	kg/cm ²	1020
Flexural Modulus	ASTM D-790	23 °C	kg/cm ²	24000
Rockwell Hardness	ASTM D-785	23 °C	R-Scale	117
Izod Impact Strength	ASTM D-256	Notched, 23 °C	Kg-cm/cm	6.0
Thermal				
Melting point	DSC	-	°C	220
Melt Flow Index	ASTM D-1238	235°C*5 kg	g/10min	8
Heat Deflection Temperature	ASTM D-648	1.80 Mpa	°C	62
Molding shrinkage	ASTM D-955	3.2mm	%	1.5-1.8

*All tests were run under laboratory conditions, ASTM, testing procedures.

*The data are intended as a general guide only.

* Absolutely dry conditions: Bake the material at 80 ~ 90 °C × 8hr or unpack it directly and inject it. After injection, the test piece is placed in a drying dish for 24 hours to test the physical properties.

Formosa Chemicals & Fibre Corp. Nylon Div.
TEL: +886-2-27122211 / FAX: +886-2-27131649 /
Address: 9th Floor, Building A2, No. 388, Sec. 6, Nanjing E. Rd.,
Neihu Dist., Taipei City, Taiwan
Website: <https://en.fcfc-plastics.com/>




SUNYLON® Polyamide 6 Pellet

Grade: **NP40MN**



台灣化學纖維股份有限公司
FORMOSA CHEMICALS & FIBRE CORPORATION

Processing Guide (Extrusion)

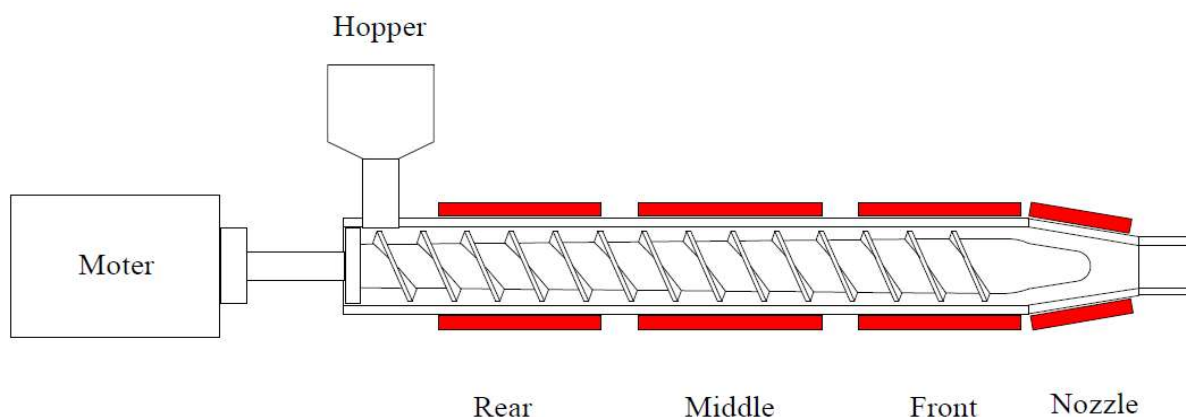

Processing Parameters	Typical Value	Unit
Rear - Zone Temperature	235-240	°C
Middle-Zone Temperature	240-250	°C
Front - Zone Temperature	250-260	°C
Nozzle Temperature	250-260	°C
Mold Temperature	-	°C
Drying Temperature	80-100	°C
Drying Time	4-5	Hr

Note

- © The above process parameters are only for injection/extrusion reference use, according to different equipment and/or product requirement, the above process should be adjusted appropriately.
- © Please note that the content of this data sheet may be altered from time to time according to improvement of the products without prior notice.

Formosa Chemicals & Fibre Corp. Nylon Div.
TEL: +886-2-27122211 / FAX: +886-2-27131649 /
Address: 9th Floor, Building A2, No. 388, Sec. 6, Nanjing E. Rd.,
Neihu Dist., Taipei City, Taiwan
Website: <https://en.fcfc-plastics.com/>



Last Updated: 24-JAN-2024