

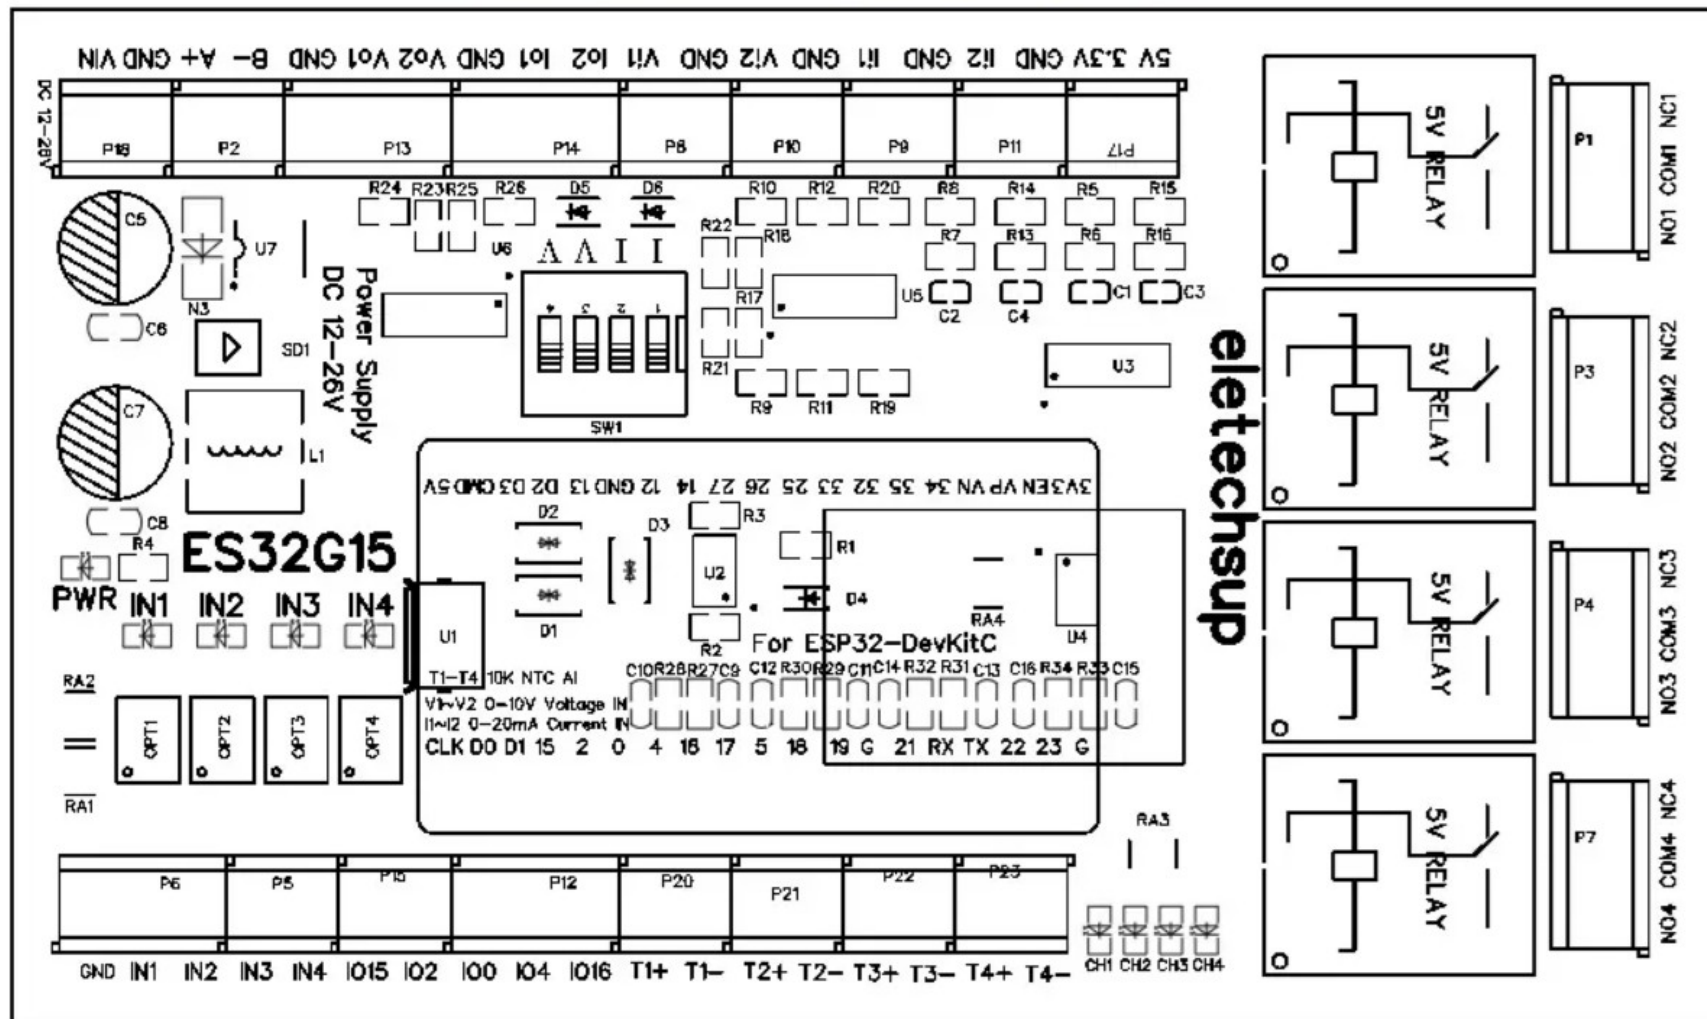


Onboard Resources

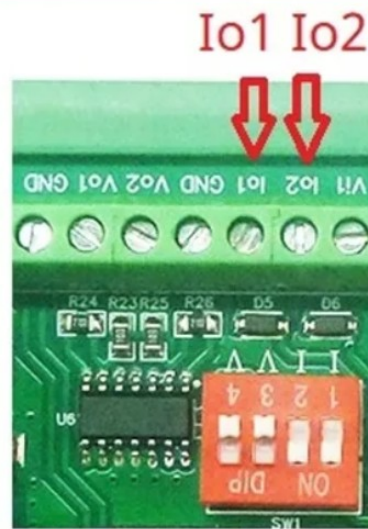


Pin Mapping

ES32G15 Expansion Board Ports	38PIN ESP32 PIN
Vo1-Vo2(0-10V AO)	IO25/IO26
Io1-Io2(0-20MA AO)	IO25/IO26
Vi1-Vi2(0-10V AI)	IO36/IO39
Ii1-Ii2(0-20MA AI)	IO34/IO35
T1-T4(10K NTC AI)	IO14/IO27/IO33/IO32
IN1-IN4(NPN DI)	IO19/IO18/IO5/IO17
CH1-CH4(Relay DO)	IO12/IO13/IO21/IO23
Free Port	IO15/IO2/IO0/IO4/IO16
RS485 Port	IO1/IO3/IO22

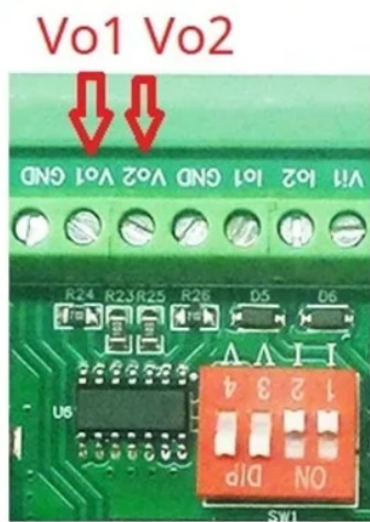

Vo1/Io1, Vo2/Io2 are multiplexed output ports,
only one of them can be enabled (selected by SW1 dip switch)

Wiring Diagram

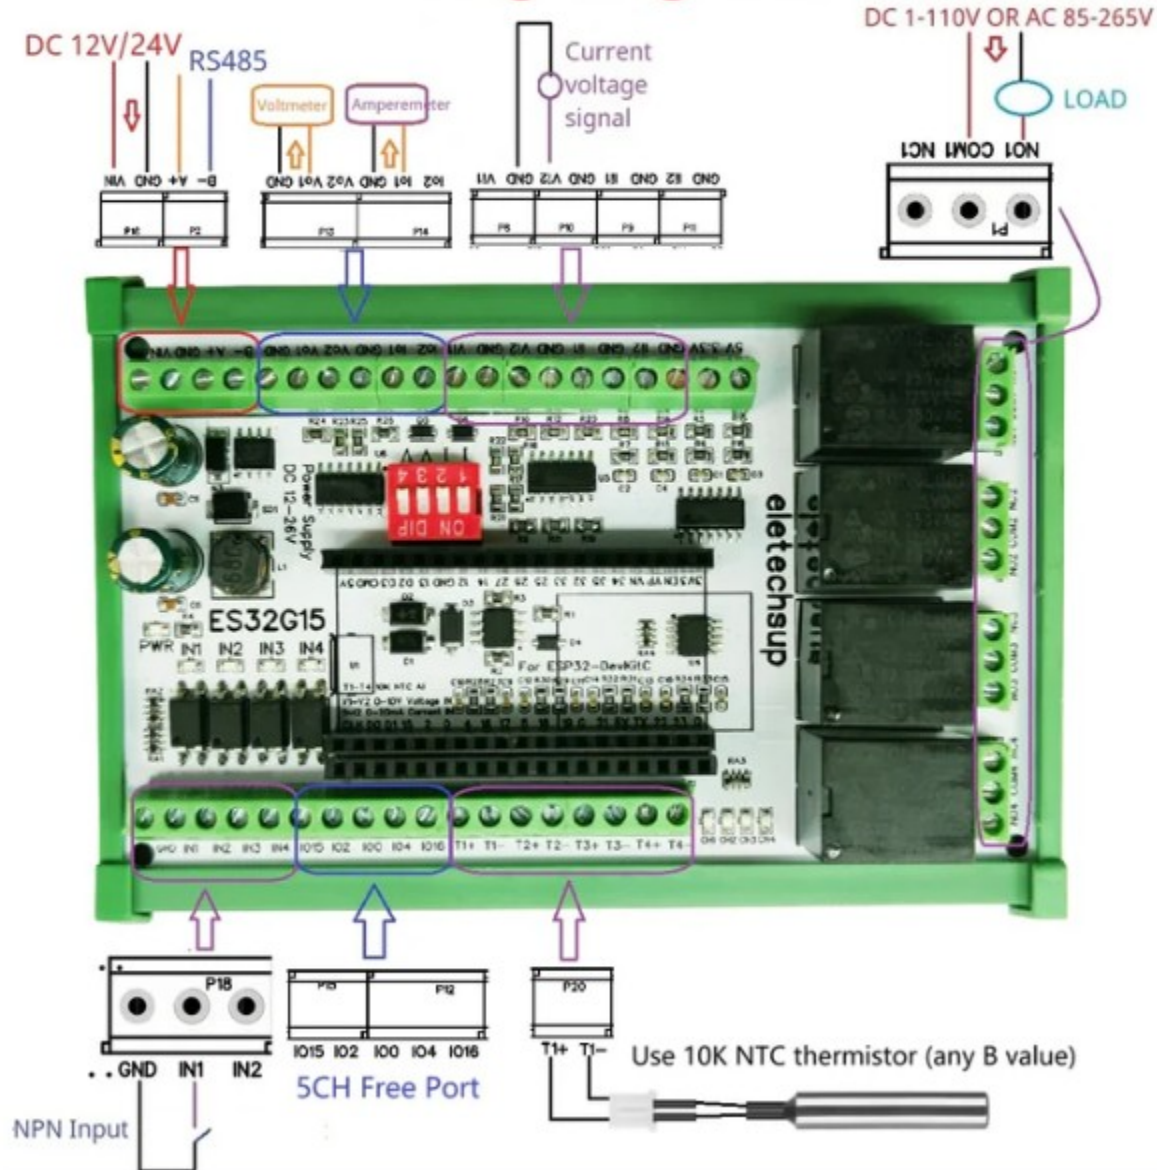

Effect of inserting ESP32 board

