



FLAT GAIN, HIGH IP3


Monolithic Amplifier

GVA-60+

50Ω 0.01 to 5 GHz

THE BIG DEAL

- Excellent Gain Flatness and Return Loss over 50 to 1000 MHz
- High IP3 vs. DC Power consumption
- Broadband High Dynamic Range without external Matching Components
- Gain, 20 dB typ. at 0.4 GHz
- Gain flatness: ± 0.3 dB over 50-1000 MHz
- Excellent Input Return Loss, up to 2 GHz, 17-24 dB
- High Pout, P1dB +20.0 dBm typ. at 0.4 GHz
- Excellent ESD protection, Class 1C for HBM
- No external matching components required



Generic photo used for illustration purposes only

CASE STYLE: DF782

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- Base station infrastructure
- Portable Wireless
- CATV & DBS
- MMDS & Wireless LAN
- LTE

PRODUCT OVERVIEW

GVA-60+ (RoHS compliant) is an wideband amplifier fabricated using HBT technology and offers ultra flat gain over a broad frequency range and with high IP3. In addition, the GVA-60+, has good input and output return loss over a broad frequency range without the need for external matching components and has demonstrated excellent reliability. It has repeatable performance from lot to lot and is enclosed in a SOT-89 package for very good thermal performance.

KEY FEATURES

Feature	Advantages
Broad Band: 0.01 to 5 GHz	Broadband covering a broad range of IF frequencies and the primary wireless communications bands: Cellular, PCS, LTE, WiMAX
High IP3 vs. DC power Consumption +40 dBm typical at 0.05 GHz +35 dBm typical at 0.85 GHz	The GVA-60+ matches industry leading IP3 performance relative to device size and power consumption. The combination of the design and HBT Structure provides enhanced linearity over a broad frequency range as evidence in the IP3 being typically 16 dB above the P 1dB point to 0.85 GHz. This feature makes this amplifier ideal for use in: • Driver amplifiers for complex waveform up converter paths • Drivers in linearized transmit systems
Outstanding Input Return Loss up to 1 GHz: better than 20 dB.	The GVA-60+ provides excellent input return loss: 20 dB up to 1 GHz and 16.8 dB up to 2 GHz making this amplifier an ideal IF gain block that can be embedded in RF chains that have highly reflective components, and still maintain good system performance
No External Matching Components Required 10-24 dB to 2 GHz	GVA-60+ provides good Input and Output Return Loss without the need for any external matching components





FLAT GAIN, HIGH IP3

Monolithic Amplifier

GVA-60+

50Ω 0.01 to 5 GHz

ELECTRICAL SPECIFICATIONS¹ AT +25°C AND VCC=+5V, UNLESS NOTED OTHERWISE

Parameter	Condition (GHz)	Min.	Typ.	Max.	Units
Frequency Range		0.01		5	GHz
Gain	0.05	18.3	20.3	22.4	dB
	0.4	—	20.1	—	
	0.85	—	19.8	—	
	2.0	16.6	18.4	20.3	
	3.0	—	17.0	—	
	4.0	—	15.4	—	
	5.0	—	14.2	—	
Input Return Loss	0.05	—	23.1	—	dB
	0.4	—	24.0	—	
	0.85	16.0	21.2	—	
	2.0	—	16.8	—	
	3.0	—	11.5	—	
	4.0	—	8.9	—	
	5.0	—	8.1	—	
Output Return Loss	0.05	—	11.2	—	dB
	0.4	—	11.8	—	
	0.85	10.0	12.0	—	
	2.0	—	9.6	—	
	3.0	—	8.0	—	
	4.0	—	7.5	—	
	5.0	—	7.8	—	
Reverse Isolation	2.0		25.2		dB
Output Power at 1dB Compression	0.05	+18.2	+20.1	—	dBm
	0.4	+18.3	+19.9	—	
	0.85	+18.1	+19.5	—	
	2.0	—	+17.9	—	
	3.0	—	+14.6	—	
	4.0	—	+12.1	—	
	5.0	—	+10.0	—	
Output IP3	0.05		+40.5		dBm
	0.4		+39.3		
	0.85		+35.6		
	2.0		+28.9		
	3.0		+24.5		
	4.0		+21.5		
	5.0		+19.3		
Noise Figure	0.05	—	3.9	5.9	dB
	0.4	—	4.0	6.0	
	0.85	—	4.0	—	
	2.0	—	4.1	—	
	3.0	—	4.1	—	
	4.0	—	4.3	—	
	5.0	—	4.5	—	
Device Operating Voltage		+4.8	+5.0	+5.2	V
Device Operating Current			92.0	99.0	mA
Device Current Variation vs. Temperature ³			172		μA/°C
Device Current Variation vs. Voltage			0.041		mA/mW
Thermal Resistance, junction-to-ground lead			37		°C/W

(1) Measured on Mini-Circuits Characterization test board TB-313. See Characterization Test Circuit (Fig. 1)

(2) Low Frequency cut-off determined by external coupling capacitors and external bias choke.

(3) Current at 85°C – Current at -45°C/130





Monolithic Amplifier

GVA-60+


50Ω 0.01 to 5 GHz

ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature (ground lead)	-40°C to +85°C
Storage Temperature	-65°C to +150°C
Operating Current at 5V	140 mA
Power Dissipation	0.7 W
Input Power (CW)	+28 dBm (10-1000 MHz, +5 minutes) +13 dBm (1000-5000 MHz, +5 minutes) +8 dBm (continuous) 28 dBm (10-1000 MHz, +5 minutes)
DC Voltage on Pin 3	+6 V

Permanent damage may occur if any of these limits are exceeded.
Electrical maximum ratings are not intended for continuous normal operation.
For continuous operation, do not exceed 5.2V device voltage.

SIMPLIFIED SCHEMATIC AND PIN DESCRIPTION

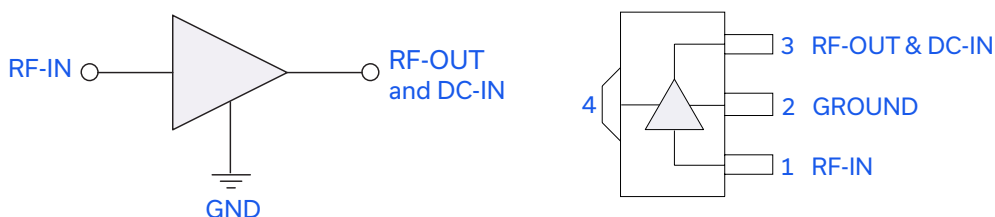

Function	Pin Number	Description
RF IN	1	RF input pin. This pin requires the use of an external DC blocking capacitor chosen for the frequency of operation.
RF-OUT and DC-IN	3	RF output and bias pin. DC voltage is present on this pin; therefore a DC blocking capacitor is necessary for proper operation. An RF choke is needed to feed DC bias without loss of RF signal due to the bias connection, as shown in "Recommended Application Circuit", Fig. 2
GND	2,4	Connections to ground. Use via holes as shown in "Suggested Layout for PCB Design" to reduce ground path inductance for best performance.



FLAT GAIN, HIGH IP3

Monolithic Amplifier

GVA-60+

Mini-Circuits

50Ω 0.01 to 5 GHz

CHARACTERIZATION TEST CIRCUIT

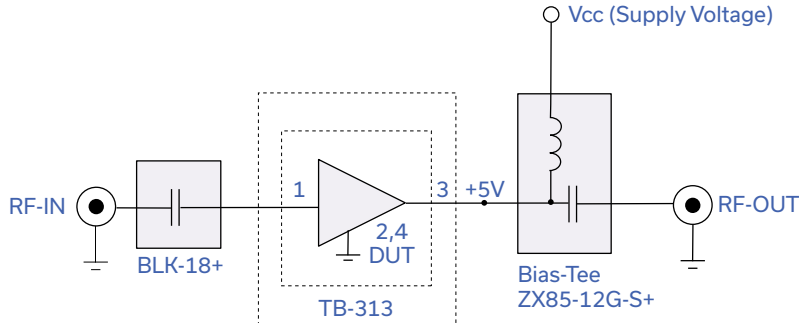


Fig 1. Block Diagram of Test Circuit used for characterization. (DUT soldered on Mini-Circuits Characterization test board TB-313) Gain, Return loss, Output power at 1dB compression (P1 dB), output IP3 (OIP3) and noise figure measured using Agilent's N5242A PNA-X microwave network analyzer.

Conditions:

1. Gain and Return loss: $P_{IN} = -25\text{dBm}$
2. Output IP3 (OIP3): Two tones, spaced 1 MHz apart, -18 dBm/ tone at input.

RECOMMENDED APPLICATION CIRCUIT


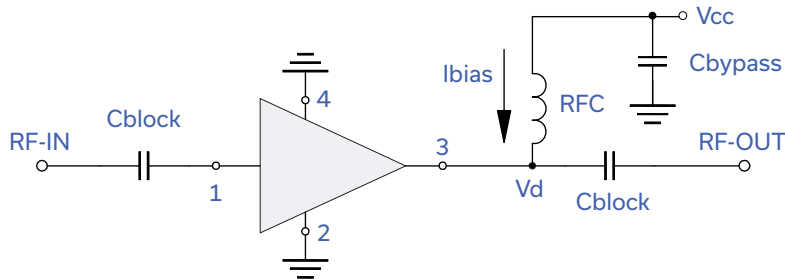


Fig 2. Test Board includes case, connectors, and components soldered to PCB.

PRODUCT MARKING



Marking may contain other features or characters for internal lot control

Mini-Circuits



Mini-Circuits

FLAT GAIN, HIGH IP3

Monolithic Amplifier

GVA-60+

50Ω 0.01 to 5 GHz

ADDITIONAL DETAILED TECHNICAL INFORMATION IS AVAILABLE ON OUR DASHBOARD. [CLICK HERE](#)

Performance Data	Data Table
	Swept Graphs
	S-Parameter (S2P Files) Data Set (.zip file)
Case Style	DF782 (SOT 89) Plastic package, exposed paddle lead finish: Matte-tin
Tape & Reel Standard quantities available on reel	F55 7" reels with 20, 50, 100, 200, 500 or 1K devices
Suggested Layout for PCB Design	PL-255
Evaluation Board	TB-596-60+
Environmental Ratings	ENV08T1

ESD RATING

Human Body Model (HBM): Class 1C (1000 to <2000V) in accordance with ANSI/ESD STM 5.1 - 2001

Machine Model (MM): Class M2 (100 to <200V) in accordance with ANSI/ESD STM5.2-1999

MSL RATING

Moisture Sensitivity: MSL1 in accordance with IPC/JEDEC J-STD-020D

NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



Typical Performance Data

NOTE: Use PDF Bookmarks to view DATA at required conditions

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5V, Id = 90.89 mA @ Temperature = +25degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
10.0	21.16	26.10	15.22	8.50	1.05	0.52	--	19.38	3.28
30.0	20.51	24.54	21.12	10.55	1.05	0.50	44.38	20.45	3.86
50.0	20.34	24.40	23.09	11.20	1.06	0.52	40.26	20.75	3.83
70.0	20.30	24.29	24.13	11.37	1.06	0.51	41.06	20.66	3.79
90.0	20.28	24.25	24.86	11.45	1.06	0.51	40.87	20.69	3.79
100.0	20.27	24.29	24.94	11.51	1.07	0.52	39.45	20.69	3.83
200.0	20.21	24.29	24.99	11.65	1.07	0.53	39.53	20.90	3.71
300.0	20.17	24.29	24.47	11.71	1.07	0.53	39.81	20.88	3.96
400.0	20.12	24.32	23.97	11.78	1.08	0.54	39.07	20.69	3.95
500.0	20.07	24.39	23.35	11.86	1.09	0.55	37.99	20.67	3.96
600.0	20.02	24.39	22.69	11.93	1.09	0.55	37.41	20.58	3.92
700.0	19.95	24.44	22.12	11.99	1.10	0.56	36.54	20.48	3.95
800.0	19.87	24.51	21.54	12.11	1.11	0.58	35.92	20.39	3.94
900.0	19.78	24.55	20.96	12.18	1.12	0.59	35.86	20.52	3.96
1000.0	19.69	24.61	20.50	12.25	1.13	0.60	35.04	20.40	4.00
1200.0	19.50	24.69	19.72	12.29	1.15	0.62	33.48	19.86	3.97
1400.0	19.27	24.83	19.16	12.27	1.17	0.65	32.83	19.57	3.98
1500.0	19.16	24.86	18.89	12.20	1.18	0.65	32.09	19.33	4.00
1600.0	19.01	24.99	18.46	12.17	1.20	0.67	31.74	18.84	4.02
1800.0	18.77	25.08	18.19	11.89	1.22	0.69	30.77	18.35	4.01
2000.0	18.49	25.19	17.70	11.62	1.25	0.71	30.02	17.94	4.02
2100.0	18.34	25.28	17.53	11.47	1.26	0.72	29.36	17.49	4.02
2200.0	18.21	25.29	17.38	11.27	1.27	0.73	28.71	17.09	4.07
2300.0	18.08	25.28	17.12	11.06	1.27	0.73	28.73	16.86	4.07
2400.0	17.93	25.32	16.95	10.88	1.28	0.74	27.96	16.37	4.02
2500.0	17.77	25.36	16.59	10.74	1.30	0.75	27.80	16.27	4.08
2600.0	17.61	25.36	16.44	10.60	1.30	0.76	27.43	15.76	4.09
2700.0	17.48	25.34	16.04	10.34	1.30	0.76	26.79	15.48	4.19
2800.0	17.30	25.37	15.98	10.26	1.32	0.77	26.64	15.12	4.18
2900.0	17.18	25.37	15.51	10.03	1.32	0.78	26.02	14.83	4.17
3000.0	17.03	25.28	15.31	9.84	1.31	0.78	25.96	14.59	4.09
3100.0	16.87	25.30	15.13	9.75	1.32	0.79	25.70	14.22	4.12
3200.0	16.65	25.46	15.09	9.85	1.36	0.80	25.44	13.98	4.17
3300.0	16.56	25.26	14.61	9.50	1.33	0.80	24.70	13.51	4.23
3400.0	16.41	25.17	14.33	9.34	1.32	0.80	24.73	13.31	4.20
3500.0	16.27	25.05	14.11	9.13	1.31	0.81	24.49	13.15	4.21
3600.0	16.13	25.15	13.67	9.07	1.32	0.82	24.04	12.62	4.23
3700.0	15.92	25.09	13.75	9.04	1.33	0.82	23.90	12.43	4.28
3800.0	15.81	24.88	13.44	8.78	1.30	0.82	23.86	12.06	4.22
3900.0	15.67	25.03	13.11	8.73	1.32	0.83	23.59	11.91	4.25
4000.0	15.48	24.83	13.07	8.55	1.31	0.83	23.41	11.58	4.27
4100.0	15.27	25.17	12.97	8.79	1.39	0.85	23.36	11.43	4.27
4200.0	15.20	24.65	12.55	8.30	1.29	0.84	23.11	11.11	4.24
4300.0	15.01	24.77	12.48	8.37	1.32	0.85	23.01	10.76	4.32
4400.0	14.85	24.68	12.31	8.22	1.32	0.85	22.83	10.66	4.36
4500.0	14.68	24.76	12.16	8.24	1.34	0.86	22.74	10.35	4.33
4600.0	14.60	24.51	11.61	7.89	1.28	0.86	22.49	10.07	4.31
4700.0	14.35	24.40	11.86	7.85	1.30	0.85	22.36	9.71	4.38
4800.0	14.27	24.37	11.31	7.64	1.27	0.86	22.32	9.70	4.34
4900.0	14.08	24.24	11.28	7.57	1.27	0.86	22.55	9.46	4.41
5000.0	13.88	24.26	11.32	7.49	1.30	0.86	22.41	9.49	4.44

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 4.75V, Id = 81.29 mA @ Temperature = +25degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
10.0	21.08	25.17	14.64	8.01	1.01	0.42	--	18.67	3.17
30.0	20.46	24.43	20.69	10.44	1.05	0.49	40.43	19.68	3.79
50.0	20.29	24.42	22.34	11.09	1.07	0.52	38.97	19.91	3.75
70.0	20.26	24.30	23.55	11.27	1.06	0.51	39.10	19.85	3.71
90.0	20.23	24.26	24.16	11.36	1.06	0.52	39.44	19.88	3.74
100.0	20.22	24.28	24.21	11.41	1.07	0.52	38.28	19.89	3.76
200.0	20.16	24.26	24.27	11.55	1.07	0.52	38.60	20.06	3.66
300.0	20.12	24.25	23.89	11.59	1.07	0.53	37.94	20.05	3.88
400.0	20.08	24.33	23.37	11.69	1.08	0.54	37.81	19.92	3.87
500.0	20.02	24.34	22.84	11.77	1.09	0.55	37.45	19.92	3.93
600.0	19.96	24.38	22.31	11.84	1.09	0.56	36.38	19.84	3.89
700.0	19.89	24.40	21.79	11.90	1.10	0.56	35.70	19.79	3.89
800.0	19.81	24.46	21.23	12.01	1.11	0.58	35.17	19.71	3.84
900.0	19.72	24.51	20.72	12.07	1.12	0.59	35.05	19.82	3.86
1000.0	19.63	24.56	20.26	12.15	1.13	0.60	34.40	19.76	3.92
1200.0	19.43	24.66	19.51	12.20	1.15	0.62	32.83	19.33	3.92
1400.0	19.20	24.79	18.96	12.18	1.17	0.65	32.11	19.09	3.89
1500.0	19.09	24.78	18.72	12.11	1.18	0.65	31.56	18.85	3.91
1600.0	18.93	24.93	18.31	12.08	1.20	0.67	31.09	18.38	3.98
1800.0	18.69	24.98	18.03	11.81	1.22	0.69	30.18	17.91	3.95
2000.0	18.40	25.07	17.56	11.54	1.24	0.71	29.49	17.51	3.92
2100.0	18.25	25.17	17.39	11.41	1.26	0.72	28.84	17.06	3.97
2200.0	18.12	25.18	17.27	11.22	1.27	0.73	28.27	16.66	3.98
2300.0	17.98	25.15	17.01	11.00	1.27	0.73	28.14	16.44	3.97
2400.0	17.83	25.20	16.82	10.83	1.28	0.74	27.47	15.96	3.93
2500.0	17.67	25.25	16.49	10.69	1.29	0.75	27.29	15.86	4.01
2600.0	17.51	25.31	16.34	10.56	1.31	0.76	27.00	15.36	4.00
2700.0	17.38	25.24	15.94	10.31	1.30	0.76	26.32	15.07	4.06
2800.0	17.21	25.25	15.88	10.24	1.31	0.77	26.18	14.74	4.07
2900.0	17.08	25.23	15.45	10.01	1.31	0.77	25.56	14.44	4.07
3000.0	16.93	25.16	15.27	9.82	1.31	0.78	25.54	14.19	3.98
3100.0	16.77	25.22	15.08	9.73	1.32	0.79	25.21	13.83	3.99
3200.0	16.54	25.35	15.05	9.83	1.36	0.80	25.00	13.57	4.07
3300.0	16.45	25.16	14.60	9.50	1.33	0.80	24.20	13.10	4.13
3400.0	16.31	25.10	14.31	9.33	1.32	0.80	24.30	12.90	4.10
3500.0	16.16	24.96	14.11	9.14	1.31	0.81	24.05	12.74	4.12
3600.0	16.02	25.06	13.69	9.07	1.32	0.82	23.62	12.21	4.12
3700.0	15.82	25.03	13.77	9.05	1.34	0.82	23.49	12.03	4.16
3800.0	15.70	24.81	13.47	8.78	1.31	0.82	23.42	11.68	4.12
3900.0	15.56	24.93	13.13	8.75	1.33	0.83	23.16	11.53	4.08
4000.0	15.37	24.71	13.10	8.57	1.31	0.83	22.94	11.20	4.10
4100.0	15.16	25.10	13.02	8.82	1.39	0.85	22.97	11.06	4.18
4200.0	15.09	24.58	12.61	8.32	1.29	0.84	22.72	10.71	4.15
4300.0	14.90	24.71	12.54	8.39	1.33	0.85	22.55	10.34	4.19
4400.0	14.75	24.65	12.37	8.24	1.33	0.85	22.40	10.27	4.22
4500.0	14.58	24.68	12.22	8.25	1.35	0.86	22.32	9.96	4.23
4600.0	14.50	24.49	11.67	7.91	1.29	0.86	22.08	9.67	4.17
4700.0	14.24	24.37	11.93	7.87	1.31	0.85	21.95	9.35	4.23
4800.0	14.17	24.29	11.39	7.65	1.28	0.86	21.90	9.32	4.24
4900.0	13.98	24.19	11.35	7.59	1.28	0.86	22.12	9.07	4.28
5000.0	13.79	24.20	11.39	7.51	1.31	0.86	22.01	9.08	4.31

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5.25V, Id = 101.11 mA @ Temperature = +25degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
10.0	21.16	24.88	14.87	8.14	1.00	0.39	--	19.70	3.40
30.0	20.53	24.52	21.33	10.60	1.05	0.50	44.18	20.99	3.94
50.0	20.37	24.39	23.21	11.26	1.06	0.51	42.01	21.39	3.95
70.0	20.33	24.31	24.62	11.45	1.06	0.51	41.94	21.21	3.88
90.0	20.30	24.36	25.42	11.56	1.07	0.52	42.06	21.25	3.91
100.0	20.29	24.34	25.47	11.61	1.07	0.52	40.73	21.23	3.93
200.0	20.23	24.32	25.53	11.75	1.07	0.53	41.41	21.50	3.85
300.0	20.19	24.34	25.00	11.80	1.07	0.53	40.42	21.46	4.04
400.0	20.15	24.40	24.36	11.89	1.08	0.54	39.43	21.18	4.10
500.0	20.10	24.42	23.65	11.95	1.09	0.55	38.84	21.14	4.09
600.0	20.04	24.45	23.04	12.02	1.09	0.56	37.57	21.02	4.04
700.0	19.98	24.49	22.36	12.07	1.10	0.57	36.98	20.87	4.06
800.0	19.90	24.55	21.78	12.18	1.11	0.58	36.19	20.76	4.05
900.0	19.82	24.60	21.16	12.25	1.12	0.59	36.03	20.89	4.10
1000.0	19.73	24.62	20.69	12.32	1.13	0.60	35.38	20.72	4.11
1200.0	19.54	24.77	19.86	12.34	1.15	0.62	33.89	20.12	4.08
1400.0	19.33	24.84	19.26	12.31	1.17	0.64	33.09	19.85	4.10
1500.0	19.22	24.87	19.02	12.25	1.18	0.65	32.40	19.60	4.13
1600.0	19.07	25.02	18.56	12.22	1.20	0.67	31.93	19.13	4.14
1800.0	18.84	25.15	18.27	11.93	1.22	0.69	31.11	18.63	4.14
2000.0	18.56	25.27	17.74	11.64	1.25	0.71	30.44	18.25	4.17
2100.0	18.41	25.30	17.60	11.50	1.26	0.72	29.74	17.79	4.17
2200.0	18.28	25.30	17.43	11.30	1.26	0.73	29.18	17.39	4.19
2300.0	18.15	25.38	17.13	11.07	1.27	0.73	29.08	17.17	4.23
2400.0	18.01	25.34	16.95	10.89	1.28	0.74	28.41	16.68	4.21
2500.0	17.85	25.43	16.54	10.74	1.29	0.75	28.26	16.59	4.24
2600.0	17.69	25.47	16.41	10.60	1.31	0.76	27.95	16.08	4.22
2700.0	17.56	25.39	15.99	10.36	1.30	0.76	27.30	15.80	4.32
2800.0	17.39	25.44	15.91	10.26	1.31	0.77	27.10	15.45	4.33
2900.0	17.26	25.46	15.41	10.03	1.31	0.78	26.56	15.16	4.32
3000.0	17.12	25.32	15.21	9.84	1.30	0.78	26.49	14.92	4.23
3100.0	16.95	25.35	15.00	9.75	1.31	0.79	26.18	14.56	4.24
3200.0	16.73	25.47	14.98	9.85	1.35	0.80	26.00	14.29	4.34
3300.0	16.64	25.30	14.50	9.50	1.32	0.80	25.21	13.84	4.37
3400.0	16.49	25.20	14.18	9.33	1.31	0.81	25.25	13.62	4.32
3500.0	16.35	25.13	13.96	9.11	1.30	0.81	25.01	13.45	4.35
3600.0	16.20	25.15	13.53	9.05	1.31	0.82	24.59	12.95	4.40
3700.0	15.99	25.12	13.61	9.03	1.32	0.82	24.45	12.75	4.46
3800.0	15.88	24.94	13.28	8.76	1.29	0.82	24.40	12.38	4.38
3900.0	15.73	25.02	12.93	8.71	1.31	0.83	24.11	12.24	4.41
4000.0	15.55	24.79	12.89	8.55	1.29	0.83	23.93	11.93	4.37
4100.0	15.33	25.11	12.81	8.78	1.36	0.85	23.96	11.77	4.45
4200.0	15.26	24.65	12.38	8.27	1.27	0.84	23.68	11.44	4.41
4300.0	15.06	24.76	12.31	8.34	1.31	0.85	23.54	11.08	4.46
4400.0	14.90	24.71	12.12	8.20	1.31	0.85	23.43	11.00	4.50
4500.0	14.73	24.78	11.97	8.21	1.33	0.86	23.34	10.67	4.51
4600.0	14.64	24.48	11.44	7.86	1.26	0.86	23.09	10.40	4.45
4700.0	14.38	24.43	11.68	7.83	1.29	0.86	22.96	10.07	4.51
4800.0	14.31	24.33	11.13	7.62	1.25	0.86	22.93	10.07	4.56
4900.0	14.11	24.21	11.08	7.55	1.26	0.86	23.12	9.83	4.56
5000.0	13.91	24.23	11.12	7.48	1.28	0.86	23.02	9.82	4.61

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5V, Id = 73.59 mA @ Temperature = -45degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
10.0	21.24	25.33	17.82	8.88	1.02	0.47	--	18.97	2.58
30.0	20.59	23.91	24.75	10.74	1.02	0.45	34.48	19.77	3.17
50.0	20.42	23.74	28.22	11.34	1.02	0.45	34.24	19.95	3.08
70.0	20.38	23.71	29.91	11.44	1.03	0.46	33.90	19.94	3.03
90.0	20.35	23.74	31.54	11.48	1.03	0.46	34.02	19.95	3.05
100.0	20.34	23.69	31.49	11.49	1.03	0.46	33.51	19.97	3.06
200.0	20.28	23.75	29.69	11.51	1.04	0.47	33.86	20.15	2.91
300.0	20.26	23.71	29.60	11.90	1.04	0.48	33.92	20.17	3.15
400.0	20.24	23.74	28.81	12.24	1.04	0.49	33.89	20.09	3.19
500.0	20.18	23.77	26.41	12.30	1.05	0.50	33.61	20.09	3.22
600.0	20.13	23.80	24.88	12.29	1.05	0.50	33.62	20.04	3.18
700.0	20.06	23.88	23.56	12.26	1.06	0.52	33.64	20.00	3.20
800.0	19.98	23.93	22.40	12.28	1.07	0.53	33.54	19.94	3.12
900.0	19.89	23.95	21.56	12.30	1.08	0.53	33.53	20.02	3.18
1000.0	19.81	24.07	20.95	12.39	1.09	0.55	32.15	20.00	3.20
1200.0	19.62	24.16	19.56	12.52	1.11	0.58	32.38	19.70	3.22
1400.0	19.39	24.30	19.01	12.52	1.13	0.60	31.78	19.55	3.18
1500.0	19.28	24.35	18.79	12.47	1.14	0.61	30.88	19.34	3.18
1600.0	19.15	24.47	18.39	12.41	1.16	0.63	30.56	18.92	3.21
1800.0	18.91	24.62	18.13	12.06	1.18	0.65	29.51	18.56	3.23
2000.0	18.62	24.76	17.65	11.76	1.21	0.68	28.33	18.17	3.23
2100.0	18.49	24.88	17.60	11.50	1.22	0.69	27.75	17.76	3.26
2200.0	18.34	24.90	17.51	11.35	1.23	0.70	27.01	17.40	3.23
2300.0	18.20	24.96	17.39	11.10	1.24	0.70	26.77	17.24	3.25
2400.0	18.04	25.04	17.14	10.98	1.26	0.72	26.25	16.77	3.25
2500.0	17.90	25.07	16.90	10.71	1.26	0.72	26.11	16.70	3.26
2600.0	17.75	25.13	16.44	10.48	1.27	0.73	25.64	16.25	3.26
2700.0	17.58	25.18	16.05	10.32	1.29	0.74	24.97	15.94	3.33
2800.0	17.43	25.22	15.57	10.09	1.29	0.75	24.87	15.69	3.36
2900.0	17.25	25.29	15.40	10.06	1.31	0.76	24.31	15.40	3.38
3000.0	17.16	25.20	14.88	9.73	1.29	0.76	24.13	15.25	3.25
3100.0	17.02	25.11	14.87	9.53	1.29	0.76	23.81	14.89	3.24
3200.0	16.88	25.20	14.61	9.42	1.30	0.77	23.35	14.67	3.29
3300.0	16.70	25.13	14.61	9.32	1.30	0.78	22.85	14.23	3.40
3400.0	16.53	25.16	14.38	9.21	1.31	0.79	22.91	14.01	3.39
3500.0	16.38	25.05	14.18	9.04	1.30	0.79	22.59	13.90	3.36
3600.0	16.27	25.13	13.51	8.96	1.30	0.81	22.29	13.44	3.41
3700.0	16.10	25.04	13.32	8.86	1.30	0.81	22.02	13.29	3.41
3800.0	15.94	24.96	13.17	8.72	1.30	0.81	22.01	12.98	3.40
3900.0	15.82	24.80	12.92	8.48	1.27	0.81	21.78	12.90	3.38
4000.0	15.59	24.90	13.07	8.60	1.31	0.82	21.57	12.59	3.37
4100.0	15.55	24.89	12.28	8.41	1.28	0.83	21.26	12.40	3.38
4200.0	15.37	24.66	12.28	8.18	1.26	0.83	21.31	12.12	3.40
4300.0	15.21	24.60	12.07	8.06	1.26	0.84	21.01	11.78	3.40
4400.0	15.06	24.51	11.88	7.88	1.24	0.84	20.88	11.71	3.45
4500.0	14.92	24.50	11.60	7.79	1.24	0.84	20.71	11.48	3.44
4600.0	14.70	24.52	11.76	7.83	1.28	0.85	20.63	11.16	3.41
4700.0	14.56	24.43	11.58	7.71	1.26	0.85	20.41	10.89	3.46
4800.0	14.41	24.23	11.36	7.42	1.23	0.84	20.34	10.90	3.48
4900.0	14.27	24.08	10.95	7.24	1.20	0.85	20.35	10.68	3.52
5000.0	14.05	24.00	11.01	7.14	1.21	0.85	20.27	10.66	3.56

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 4.75V, Id = 61.95 mA @ Temperature = -45degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
10.0	21.18	24.59	17.40	8.53	0.99	0.38	--	17.92	2.46
30.0	20.53	23.70	24.86	10.46	1.01	0.42	32.22	18.77	2.99
50.0	20.37	23.48	28.27	11.05	1.01	0.43	31.76	18.89	3.01
70.0	20.32	23.62	30.07	11.17	1.02	0.45	31.57	18.91	2.93
90.0	20.30	23.59	31.48	11.19	1.02	0.45	31.80	18.91	2.97
100.0	20.28	23.57	31.55	11.20	1.02	0.45	31.35	18.94	2.96
200.0	20.23	23.61	29.71	11.21	1.03	0.46	31.46	19.08	2.82
300.0	20.21	23.57	29.59	11.57	1.03	0.46	31.55	19.09	3.12
400.0	20.18	23.57	28.68	11.91	1.03	0.47	31.52	19.07	3.08
500.0	20.13	23.64	26.30	11.98	1.04	0.48	31.23	19.07	3.12
600.0	20.07	23.70	24.74	11.97	1.05	0.49	31.21	19.02	3.11
700.0	19.99	23.72	23.50	11.95	1.05	0.50	31.19	19.00	3.13
800.0	19.91	23.78	22.23	11.97	1.06	0.51	31.05	18.94	3.05
900.0	19.82	23.82	21.42	11.99	1.07	0.52	30.97	18.98	3.09
1000.0	19.73	23.92	20.82	12.10	1.08	0.54	30.03	18.99	3.14
1200.0	19.53	24.02	19.34	12.22	1.10	0.57	30.00	18.79	3.11
1400.0	19.30	24.18	18.79	12.24	1.13	0.60	29.59	18.71	3.11
1500.0	19.18	24.25	18.53	12.18	1.14	0.61	28.80	18.54	3.10
1600.0	19.04	24.36	18.15	12.13	1.15	0.63	28.52	18.25	3.13
1800.0	18.79	24.48	17.88	11.82	1.18	0.65	27.67	17.99	3.13
2000.0	18.49	24.64	17.36	11.55	1.21	0.67	26.73	17.62	3.15
2100.0	18.35	24.70	17.30	11.30	1.22	0.68	26.25	17.26	3.13
2200.0	18.20	24.82	17.21	11.14	1.23	0.69	25.56	16.91	3.17
2300.0	18.06	24.83	17.11	10.93	1.24	0.70	25.35	16.77	3.18
2400.0	17.89	24.97	16.85	10.81	1.26	0.72	24.86	16.34	3.13
2500.0	17.74	24.97	16.61	10.57	1.27	0.72	24.75	16.26	3.19
2600.0	17.59	24.99	16.18	10.33	1.27	0.73	24.34	15.84	3.20
2700.0	17.41	25.06	15.79	10.17	1.29	0.74	23.72	15.54	3.26
2800.0	17.26	25.12	15.33	9.96	1.30	0.75	23.65	15.27	3.27
2900.0	17.07	25.23	15.12	9.95	1.32	0.76	23.12	15.00	3.27
3000.0	16.98	25.14	14.65	9.62	1.30	0.76	22.96	14.85	3.14
3100.0	16.83	25.05	14.64	9.44	1.30	0.77	22.68	14.51	3.15
3200.0	16.69	25.13	14.38	9.33	1.31	0.78	22.24	14.29	3.19
3300.0	16.50	25.09	14.35	9.25	1.32	0.78	21.74	13.86	3.29
3400.0	16.33	25.09	14.16	9.14	1.32	0.79	21.84	13.63	3.24
3500.0	16.17	24.98	13.97	8.96	1.31	0.79	21.54	13.53	3.26
3600.0	16.06	25.08	13.37	8.90	1.32	0.81	21.23	13.08	3.30
3700.0	15.88	24.99	13.15	8.80	1.32	0.81	20.97	12.93	3.31
3800.0	15.72	24.93	12.94	8.69	1.32	0.82	20.98	12.64	3.32
3900.0	15.59	24.74	12.76	8.46	1.29	0.82	20.75	12.56	3.27
4000.0	15.37	24.89	12.83	8.57	1.34	0.83	20.56	12.27	3.24
4100.0	15.32	24.85	12.15	8.38	1.30	0.84	20.28	12.06	3.30
4200.0	15.12	24.60	12.09	8.20	1.28	0.84	20.31	11.81	3.25
4300.0	14.97	24.49	11.96	8.05	1.27	0.84	20.07	11.47	3.34
4400.0	14.81	24.47	11.81	7.88	1.27	0.84	19.93	11.38	3.35
4500.0	14.68	24.44	11.49	7.80	1.26	0.85	19.78	11.14	3.31
4600.0	14.46	24.39	11.70	7.83	1.29	0.85	19.70	10.85	3.30
4700.0	14.31	24.43	11.49	7.73	1.30	0.86	19.48	10.58	3.35
4800.0	14.15	24.13	11.21	7.45	1.25	0.85	19.43	10.60	3.37
4900.0	14.00	24.02	10.90	7.28	1.22	0.85	19.49	10.39	3.39
5000.0	13.78	23.92	10.92	7.19	1.23	0.85	19.39	10.35	3.39

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5.25V, Id = 85.23 mA @ Temperature = -45degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
10.0	21.27	25.49	17.31	9.01	1.03	0.49	--	19.87	2.66
30.0	20.62	24.04	24.36	10.93	1.02	0.46	37.38	20.69	3.27
50.0	20.46	23.83	27.31	11.54	1.03	0.46	36.41	20.92	3.17
70.0	20.42	23.90	29.39	11.64	1.04	0.48	36.53	20.88	3.11
90.0	20.39	23.82	30.59	11.68	1.03	0.47	36.51	20.91	3.15
100.0	20.38	23.84	30.55	11.69	1.04	0.47	36.11	20.92	3.17
200.0	20.32	23.85	29.09	11.71	1.04	0.48	35.84	21.13	3.07
300.0	20.30	23.87	29.33	12.12	1.05	0.49	36.22	21.15	3.27
400.0	20.27	23.90	28.77	12.45	1.05	0.50	36.16	21.03	3.29
500.0	20.23	23.91	26.47	12.52	1.05	0.51	35.92	21.02	3.32
600.0	20.17	23.95	25.04	12.50	1.06	0.52	35.95	20.95	3.28
700.0	20.11	24.01	23.71	12.47	1.07	0.53	36.22	20.89	3.26
800.0	20.03	24.04	22.55	12.48	1.07	0.53	35.86	20.83	3.23
900.0	19.95	24.13	21.74	12.51	1.08	0.55	35.35	20.93	3.20
1000.0	19.87	24.15	21.17	12.59	1.09	0.56	34.06	20.86	3.33
1200.0	19.69	24.29	19.75	12.72	1.11	0.58	34.26	20.43	3.32
1400.0	19.48	24.40	19.29	12.72	1.13	0.61	33.41	20.19	3.30
1500.0	19.37	24.47	19.03	12.66	1.14	0.62	32.28	19.94	3.29
1600.0	19.24	24.60	18.67	12.59	1.16	0.64	31.85	19.47	3.33
1800.0	19.02	24.68	18.45	12.24	1.18	0.65	30.74	19.05	3.34
2000.0	18.73	24.90	17.95	11.92	1.21	0.68	29.44	18.64	3.33
2100.0	18.61	24.97	17.89	11.65	1.22	0.69	28.89	18.21	3.36
2200.0	18.47	24.98	17.77	11.50	1.23	0.70	28.08	17.84	3.33
2300.0	18.34	25.00	17.66	11.25	1.24	0.70	27.81	17.66	3.37
2400.0	18.18	25.15	17.39	11.10	1.26	0.72	27.34	17.19	3.31
2500.0	18.05	25.15	17.17	10.85	1.26	0.72	27.17	17.11	3.63
2600.0	17.90	25.16	16.68	10.60	1.26	0.73	26.69	16.64	3.39
2700.0	17.73	25.26	16.28	10.41	1.28	0.74	26.09	16.35	3.44
2800.0	17.59	25.29	15.80	10.19	1.29	0.75	25.95	16.08	3.44
2900.0	17.42	25.33	15.62	10.15	1.30	0.76	25.37	15.78	3.45
3000.0	17.33	25.30	15.06	9.81	1.29	0.76	25.19	15.62	3.40
3100.0	17.20	25.19	15.07	9.60	1.28	0.76	24.87	15.26	3.37
3200.0	17.06	25.26	14.78	9.48	1.29	0.77	24.40	15.04	3.42
3300.0	16.89	25.21	14.79	9.39	1.29	0.78	23.93	14.58	3.47
3400.0	16.72	25.17	14.56	9.27	1.29	0.79	23.94	14.36	3.45
3500.0	16.58	25.07	14.33	9.07	1.28	0.79	23.62	14.24	3.45
3600.0	16.47	25.25	13.64	8.99	1.30	0.80	23.31	13.78	3.51
3700.0	16.31	25.13	13.46	8.88	1.29	0.81	23.03	13.62	3.53
3800.0	16.15	24.97	13.31	8.72	1.27	0.81	22.98	13.31	3.52
3900.0	16.04	24.83	13.03	8.50	1.25	0.81	22.73	13.22	3.51
4000.0	15.81	24.99	13.22	8.61	1.30	0.82	22.55	12.90	3.48
4100.0	15.77	24.97	12.41	8.41	1.27	0.83	22.21	12.71	3.50
4200.0	15.59	24.68	12.38	8.18	1.24	0.83	22.22	12.43	3.49
4300.0	15.44	24.60	12.18	8.05	1.23	0.83	21.93	12.09	3.54
4400.0	15.30	24.54	11.98	7.87	1.22	0.83	21.79	12.01	3.58
4500.0	15.16	24.54	11.69	7.76	1.22	0.84	21.60	11.74	3.57
4600.0	14.94	24.54	11.85	7.81	1.25	0.84	21.51	11.46	3.56
4700.0	14.80	24.46	11.67	7.68	1.24	0.84	21.25	11.17	3.62
4800.0	14.66	24.26	11.43	7.37	1.20	0.84	21.18	11.18	3.60
4900.0	14.52	24.14	11.02	7.19	1.17	0.84	21.19	10.96	3.63
5000.0	14.30	24.08	11.07	7.10	1.19	0.84	21.07	10.93	3.66

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5V, Id = 95.9 mA @ Temperature = +85degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
10.0	21.01	25.19	14.75	8.03	1.02	0.43	--	19.15	3.76
30.0	20.38	24.41	20.79	10.46	1.05	0.50	42.26	20.40	4.41
50.0	20.22	24.45	22.70	11.14	1.07	0.53	41.19	20.79	4.39
70.0	20.18	24.20	24.13	11.38	1.06	0.52	41.46	20.60	4.34
90.0	20.16	24.23	25.05	11.54	1.07	0.52	40.93	20.64	4.34
100.0	20.15	24.24	25.27	11.62	1.07	0.53	39.65	20.62	4.38
200.0	20.10	24.19	26.34	11.97	1.07	0.53	39.73	20.85	4.29
300.0	20.05	24.19	25.14	11.91	1.08	0.54	39.46	20.78	4.56
400.0	20.00	24.29	23.61	11.81	1.08	0.55	38.53	20.49	4.52
500.0	19.94	24.31	22.46	11.74	1.09	0.55	37.47	20.48	4.59
600.0	19.88	24.37	21.80	11.74	1.10	0.56	36.56	20.35	4.51
700.0	19.81	24.40	21.18	11.77	1.10	0.57	35.66	20.23	4.56
800.0	19.74	24.44	20.46	11.85	1.11	0.58	35.17	20.10	4.51
900.0	19.65	24.50	19.72	11.87	1.12	0.59	34.75	20.24	4.51
1000.0	19.56	24.58	19.17	11.88	1.13	0.60	33.82	20.05	4.59
1200.0	19.36	24.73	18.33	11.90	1.15	0.63	32.74	19.43	4.61
1400.0	19.14	24.86	17.65	11.87	1.18	0.65	32.02	19.10	4.56
1500.0	19.02	24.94	17.42	11.83	1.19	0.66	31.38	18.86	4.60
1600.0	18.89	25.00	17.11	11.82	1.20	0.68	30.95	18.35	4.65
1800.0	18.63	25.06	16.82	11.62	1.22	0.70	30.32	17.77	4.67
2000.0	18.33	25.24	16.34	11.39	1.25	0.72	29.75	17.35	4.68
2100.0	18.19	25.21	16.18	11.16	1.26	0.73	29.20	16.88	4.66
2200.0	18.03	25.27	15.95	11.05	1.27	0.74	28.71	16.45	4.70
2300.0	17.88	25.21	15.70	10.84	1.27	0.75	28.67	16.19	4.73
2400.0	17.71	25.22	15.46	10.69	1.27	0.76	27.99	15.71	4.66
2500.0	17.54	25.27	15.21	10.54	1.29	0.77	27.89	15.58	4.77
2600.0	17.37	25.26	14.92	10.40	1.29	0.78	27.60	15.08	4.77
2700.0	17.20	25.21	14.64	10.19	1.29	0.78	27.15	14.80	4.85
2800.0	17.02	25.22	14.29	10.07	1.30	0.79	26.90	14.43	4.89
2900.0	16.82	25.17	14.14	10.00	1.30	0.80	26.55	14.13	4.86
3000.0	16.68	25.11	13.66	9.77	1.29	0.81	26.53	13.89	4.82
3100.0	16.50	25.03	13.50	9.62	1.29	0.81	26.20	13.51	4.78
3200.0	16.31	25.03	13.18	9.56	1.30	0.83	26.01	13.27	4.86
3300.0	16.12	24.95	13.01	9.42	1.30	0.83	25.37	12.82	4.95
3400.0	15.93	24.87	12.73	9.34	1.30	0.84	25.49	12.64	4.87
3500.0	15.74	24.74	12.60	9.17	1.29	0.84	25.40	12.44	4.92
3600.0	15.55	24.76	12.31	9.16	1.30	0.85	24.96	11.95	4.95
3700.0	15.36	24.68	12.20	9.05	1.31	0.86	24.84	11.75	4.96
3800.0	15.18	24.58	11.95	8.89	1.30	0.86	24.89	11.41	4.96
3900.0	15.00	24.44	11.77	8.74	1.29	0.87	24.61	11.25	4.95
4000.0	14.75	24.31	11.77	8.69	1.29	0.87	24.52	10.96	4.96
4100.0	14.57	24.45	11.56	8.66	1.32	0.88	24.55	10.82	5.03
4200.0	14.40	24.38	11.28	8.57	1.32	0.89	24.41	10.50	4.99
4300.0	14.17	24.15	11.20	8.45	1.31	0.89	24.24	10.19	5.06
4400.0	14.00	24.15	10.99	8.34	1.31	0.89	24.22	10.11	5.11
4500.0	13.82	24.28	10.88	8.36	1.35	0.90	24.12	9.81	5.14
4600.0	13.58	23.96	10.67	8.17	1.32	0.90	24.05	9.56	5.08
4700.0	13.39	23.92	10.50	8.06	1.32	0.90	23.85	9.25	5.14
4800.0	13.23	23.83	10.21	7.90	1.31	0.90	23.89	9.26	5.16
4900.0	13.05	23.89	10.00	7.91	1.33	0.91	24.09	9.04	5.20
5000.0	12.78	23.63	10.11	7.75	1.33	0.90	24.03	9.01	5.26

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 4.75V, Id = 85.76 mA @ Temperature = +85degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
10.0	20.99	25.96	14.78	8.27	1.06	0.51	--	18.73	3.69
30.0	20.35	24.46	20.49	10.39	1.05	0.50	39.63	19.82	4.26
50.0	20.19	24.32	22.12	11.07	1.07	0.52	38.91	20.11	4.27
70.0	20.15	24.18	23.51	11.27	1.06	0.51	39.03	20.01	4.25
90.0	20.13	24.15	24.40	11.43	1.06	0.52	39.23	20.03	4.24
100.0	20.12	24.12	24.57	11.50	1.06	0.52	38.34	20.03	4.27
200.0	20.07	24.15	25.58	11.85	1.07	0.53	38.81	20.23	4.16
300.0	20.02	24.17	24.60	11.82	1.08	0.53	38.26	20.19	4.49
400.0	19.97	24.18	23.17	11.70	1.08	0.54	37.50	19.97	4.41
500.0	19.90	24.27	22.13	11.63	1.09	0.55	37.00	19.96	4.43
600.0	19.84	24.32	21.48	11.64	1.09	0.56	35.85	19.85	4.42
700.0	19.77	24.38	20.93	11.69	1.10	0.57	35.14	19.77	4.46
800.0	19.69	24.41	20.23	11.76	1.11	0.58	34.62	19.66	4.43
900.0	19.60	24.48	19.55	11.77	1.12	0.59	34.50	19.82	4.43
1000.0	19.51	24.54	19.00	11.80	1.13	0.60	33.66	19.68	4.49
1200.0	19.31	24.68	18.21	11.82	1.15	0.62	32.46	19.11	4.45
1400.0	19.07	24.81	17.55	11.80	1.18	0.65	31.76	18.79	4.48
1500.0	18.96	24.84	17.33	11.76	1.19	0.66	31.23	18.54	4.50
1600.0	18.82	24.93	17.06	11.75	1.20	0.67	30.77	18.03	4.53
1800.0	18.56	25.04	16.76	11.56	1.23	0.70	30.02	17.47	4.55
2000.0	18.25	25.15	16.32	11.32	1.25	0.72	29.41	17.04	4.55
2100.0	18.12	25.14	16.16	11.08	1.25	0.73	28.78	16.56	4.55
2200.0	17.95	25.19	15.95	10.98	1.27	0.74	28.34	16.14	4.59
2300.0	17.81	25.19	15.71	10.78	1.27	0.75	28.29	15.88	4.61
2400.0	17.64	25.21	15.49	10.62	1.28	0.76	27.66	15.39	4.52
2500.0	17.47	25.17	15.24	10.48	1.28	0.76	27.52	15.26	4.60
2600.0	17.29	25.21	14.99	10.33	1.29	0.77	27.23	14.76	4.63
2700.0	17.13	25.18	14.73	10.13	1.29	0.78	26.73	14.46	4.72
2800.0	16.95	25.20	14.37	10.02	1.30	0.79	26.55	14.11	4.70
2900.0	16.76	25.14	14.22	9.94	1.31	0.80	26.10	13.81	4.72
3000.0	16.61	25.10	13.76	9.72	1.30	0.81	26.02	13.56	4.65
3100.0	16.44	24.99	13.62	9.57	1.29	0.81	25.78	13.19	4.63
3200.0	16.25	25.03	13.30	9.51	1.31	0.82	25.58	12.96	4.69
3300.0	16.06	24.84	13.13	9.37	1.30	0.83	24.89	12.49	4.79
3400.0	15.88	24.86	12.87	9.29	1.31	0.84	25.02	12.30	4.75
3500.0	15.69	24.70	12.74	9.11	1.29	0.84	24.93	12.10	4.76
3600.0	15.51	24.73	12.46	9.10	1.31	0.85	24.48	11.62	4.79
3700.0	15.32	24.68	12.34	9.01	1.31	0.85	24.36	11.40	4.82
3800.0	15.15	24.59	12.12	8.84	1.31	0.86	24.39	11.07	4.77
3900.0	14.97	24.42	11.93	8.68	1.29	0.86	24.13	10.93	4.80
4000.0	14.74	24.27	11.94	8.62	1.29	0.86	24.04	10.60	4.82
4100.0	14.55	24.40	11.72	8.58	1.32	0.87	24.03	10.46	4.87
4200.0	14.38	24.32	11.49	8.52	1.32	0.88	23.85	10.14	4.83
4300.0	14.17	24.12	11.39	8.38	1.31	0.88	23.74	9.85	4.91
4400.0	14.01	24.15	11.14	8.26	1.31	0.88	23.66	9.75	4.96
4500.0	13.82	24.31	11.06	8.30	1.36	0.89	23.60	9.45	4.94
4600.0	13.60	23.94	10.83	8.10	1.31	0.89	23.54	9.22	4.92
4700.0	13.41	23.87	10.67	7.98	1.32	0.89	23.32	8.87	4.97
4800.0	13.26	23.82	10.36	7.82	1.30	0.90	23.38	8.86	4.97
4900.0	13.08	23.91	10.17	7.86	1.33	0.91	23.55	8.65	5.00
5000.0	12.81	23.61	10.26	7.66	1.32	0.90	23.57	8.61	5.05

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)









Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)








TEST CONDITIONS: Vd = 5.25V, Id = 107.84 mA @ Temperature = +85degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
10.0	21.06	25.97	15.20	8.29	1.05	0.51	--	19.35	3.93
30.0	20.41	24.45	21.18	10.55	1.05	0.50	42.43	20.68	4.60
50.0	20.25	24.44	23.30	11.25	1.07	0.53	42.82	21.21	4.50
70.0	20.21	24.25	24.68	11.47	1.06	0.52	41.64	20.91	4.46
90.0	20.19	24.21	25.71	11.62	1.07	0.52	41.85	20.95	4.50
100.0	20.18	24.24	25.98	11.71	1.07	0.53	40.48	20.93	4.49
200.0	20.13	24.18	27.15	12.05	1.07	0.53	40.68	21.22	4.40
300.0	20.09	24.24	25.71	12.02	1.08	0.54	39.49	21.13	4.71
400.0	20.03	24.32	23.97	11.89	1.08	0.55	39.22	20.78	4.66
500.0	19.97	24.35	22.79	11.83	1.09	0.55	37.23	20.75	4.74
600.0	19.92	24.36	22.08	11.83	1.09	0.56	36.06	20.58	4.66
700.0	19.85	24.45	21.41	11.87	1.10	0.57	35.48	20.44	4.66
800.0	19.78	24.52	20.64	11.93	1.11	0.58	34.83	20.30	4.64
900.0	19.69	24.55	19.87	11.93	1.12	0.59	34.72	20.48	4.71
1000.0	19.60	24.62	19.29	11.97	1.13	0.60	33.79	20.25	4.74
1200.0	19.42	24.76	18.39	11.98	1.15	0.62	32.72	19.60	4.72
1400.0	19.19	24.90	17.69	11.97	1.18	0.65	32.07	19.30	4.72
1500.0	19.08	24.93	17.44	11.92	1.19	0.66	31.57	19.07	4.72
1600.0	18.95	25.04	17.15	11.92	1.20	0.68	31.06	18.56	4.76
1800.0	18.70	25.16	16.80	11.72	1.23	0.70	30.36	17.98	4.77
2000.0	18.39	25.28	16.30	11.47	1.25	0.72	29.96	17.60	4.80
2100.0	18.26	25.24	16.15	11.25	1.25	0.73	29.35	17.13	4.85
2200.0	18.10	25.27	15.92	11.14	1.26	0.74	28.95	16.72	4.84
2300.0	17.95	25.34	15.61	10.94	1.27	0.75	28.95	16.45	4.91
2400.0	17.78	25.29	15.38	10.78	1.28	0.76	28.30	15.98	4.89
2500.0	17.60	25.32	15.11	10.63	1.28	0.77	28.20	15.86	4.91
2600.0	17.43	25.31	14.83	10.47	1.29	0.78	27.98	15.35	4.90
2700.0	17.26	25.22	14.53	10.28	1.28	0.79	27.48	15.09	5.00
2800.0	17.07	25.25	14.16	10.17	1.29	0.80	27.30	14.73	5.02
2900.0	16.87	25.19	13.99	10.10	1.30	0.81	26.97	14.44	5.04
3000.0	16.73	25.14	13.50	9.86	1.29	0.81	26.89	14.19	4.98
3100.0	16.54	25.02	13.34	9.71	1.28	0.82	26.57	13.84	4.94
3200.0	16.34	25.07	13.01	9.64	1.30	0.83	26.45	13.60	5.00
3300.0	16.15	24.95	12.83	9.50	1.29	0.84	25.81	13.14	5.11
3400.0	15.96	24.93	12.55	9.44	1.30	0.85	25.97	12.95	5.05
3500.0	15.76	24.70	12.42	9.26	1.28	0.85	25.87	12.77	5.08
3600.0	15.57	24.75	12.13	9.26	1.30	0.86	25.44	12.29	5.12
3700.0	15.36	24.66	12.00	9.14	1.30	0.87	25.35	12.07	5.16
3800.0	15.19	24.56	11.76	8.98	1.29	0.87	25.37	11.74	5.13
3900.0	14.99	24.41	11.56	8.85	1.28	0.87	25.13	11.61	5.15
4000.0	14.74	24.31	11.58	8.81	1.29	0.88	25.14	11.33	5.20
4100.0	14.55	24.42	11.36	8.78	1.32	0.89	25.02	11.19	5.22
4200.0	14.39	24.32	11.05	8.67	1.31	0.89	24.87	10.87	5.20
4300.0	14.14	24.09	10.98	8.55	1.30	0.89	24.74	10.56	5.29
4400.0	13.97	24.18	10.78	8.46	1.32	0.90	24.64	10.48	5.34
4500.0	13.78	24.29	10.66	8.47	1.36	0.91	24.57	10.19	5.33
4600.0	13.53	23.94	10.50	8.30	1.32	0.91	24.56	9.95	5.34
4700.0	13.34	23.90	10.31	8.19	1.33	0.91	24.39	9.62	5.34
4800.0	13.17	23.79	10.02	8.02	1.31	0.91	24.44	9.62	5.37
4900.0	12.98	23.86	9.82	8.03	1.34	0.92	24.56	9.42	5.44
5000.0	12.70	23.69	9.94	7.90	1.35	0.92	24.55	9.41	5.49


Typical Performance Curves

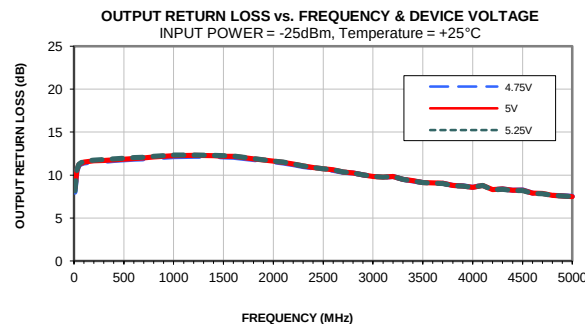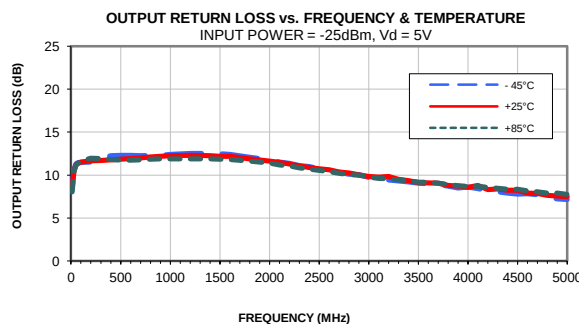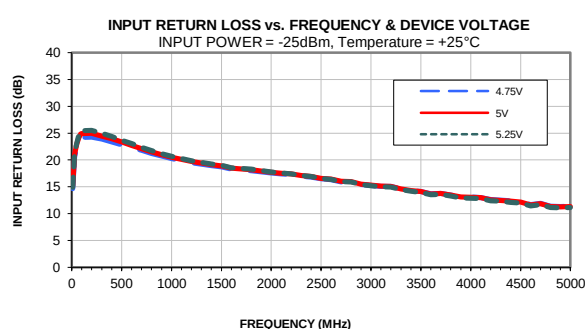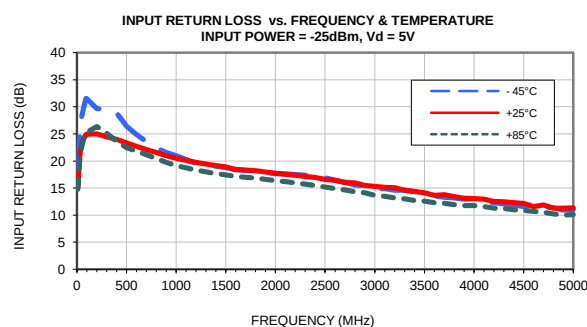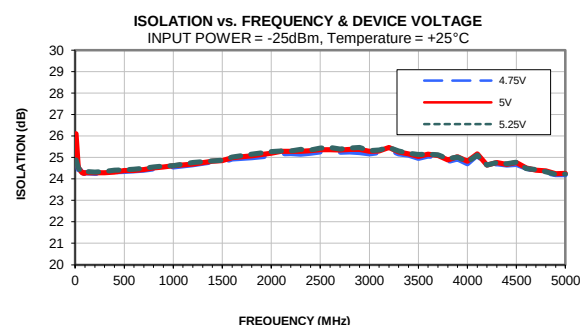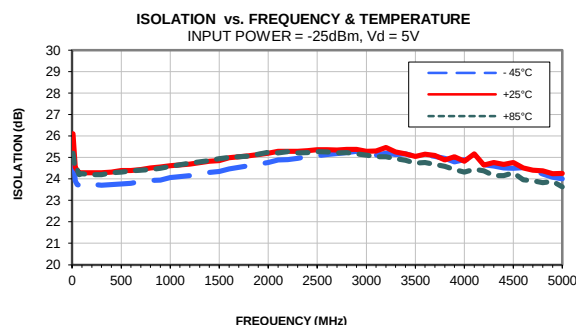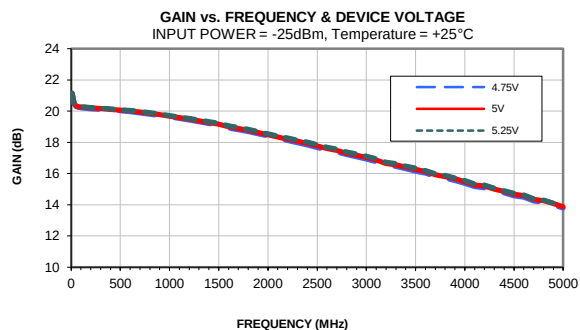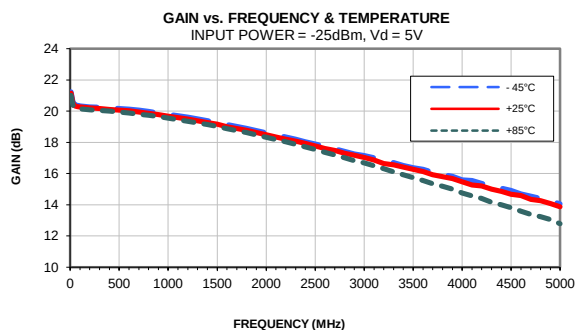


Typical Performance Curves

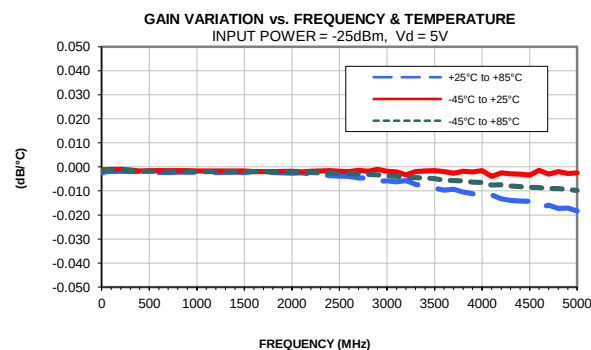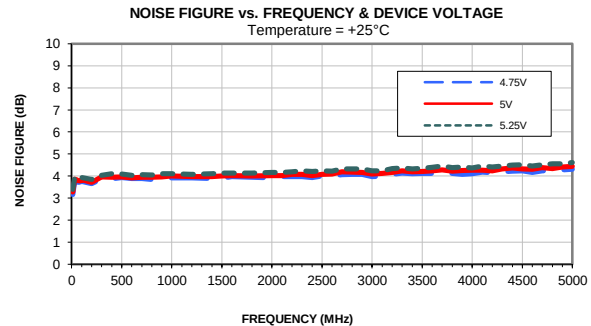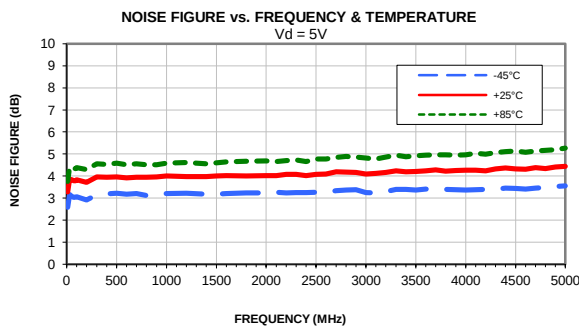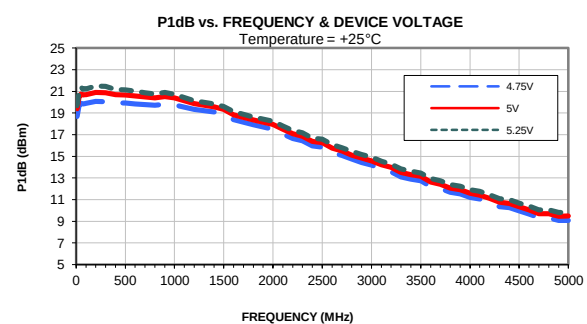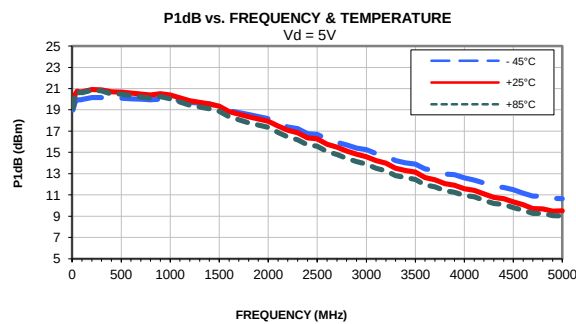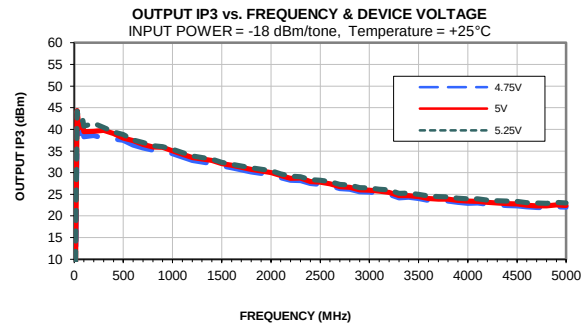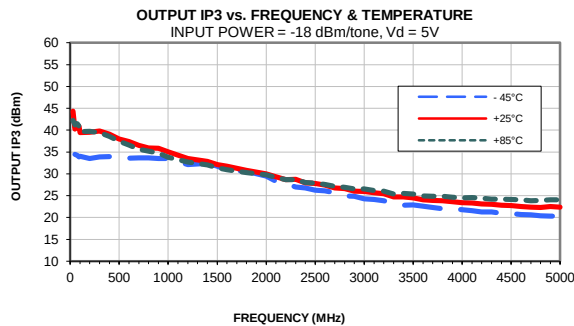

Outline Dimensions

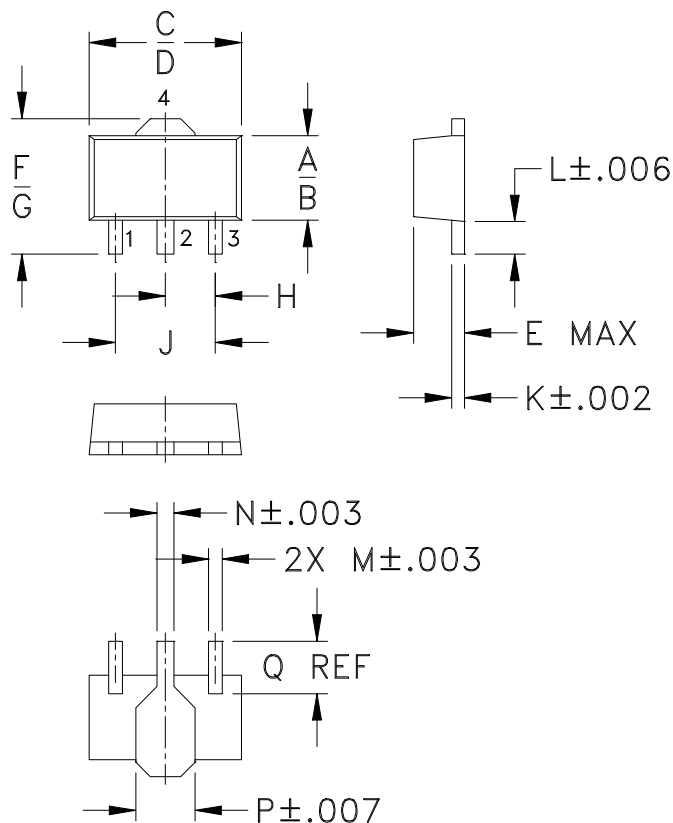

PCB Land Pattern

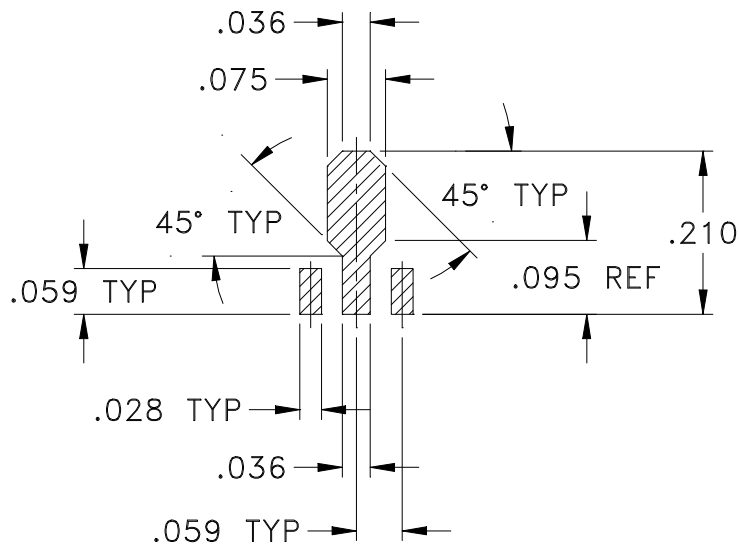

Suggested Layout,
Tolerance to be within $\pm .002$

CASE #	A	B	C	D	E	F	G	H	J	K	L	M
DF782	.102 (2.59)	.090 (2.29)	.181 (4.60)	.173 (4.39)	.063 (1.60)	.167 (4.24)	.155 (3.94)	.059 (1.50)	.118 (3.00)	.015 (0.38)	.041 (1.04)	.016 (0.41)

CASE #	N	P	Q	WT. GRAM
DF782	.019 (0.48)	.065 (1.65)	.062 (1.57)	.2

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3Pl. $\pm .005$

Notes:

- Case material: Plastic.
- Termination finish:
For RoHS Case Styles: Tin-Silver alloy plate over Nickel barrier or Matte-Tin.
All models, (+) suffix. See model Data sheet.
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.



INTERNET <http://www.minicircuits.com>


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

Tape & Reel Packaging TR-F55

DEVICE ORIENTATION IN T&R

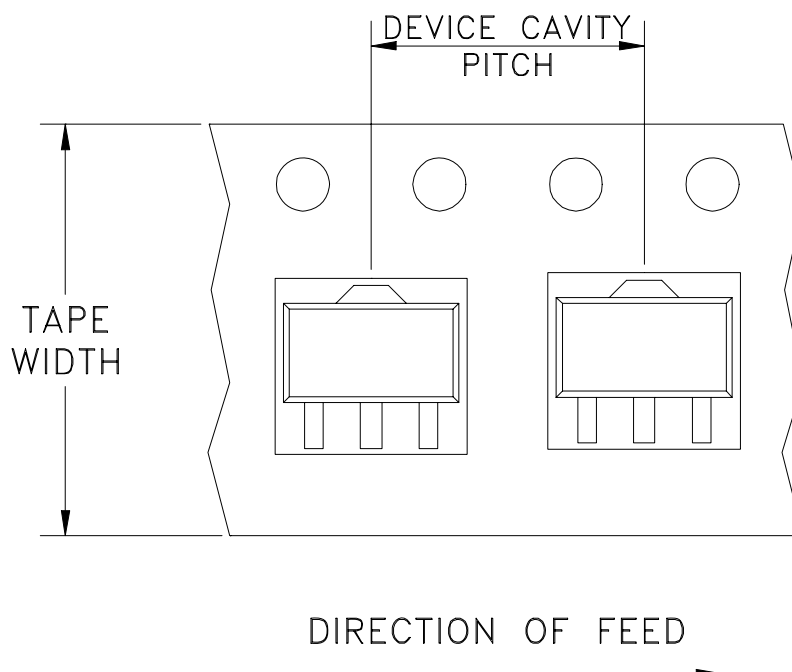

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
12	8	7	Small quantity standard (see note)	20
				50
				100
				200
				500
			Standard	1000

Note: Please consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf



INTERNET <http://www.minicircuits.com>
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M108433	NEW RELEASE	11/14/06	PW	IG
A	M124803	"04AM03" WAS "mz", MODIFIED TB IN TITLE	10/23/09	MMG	DJ

8X ϕ .020 PTH FOR GROUND

.096 TYP

45° TYP

.020 TYP

.066 TRACE WIDTH, 2 PL.
(SEE NOTE BELOW)

PIN 1

.020

.028 TYP

.027 TYP

.036

.072

.040

PACKAGE OUTLINE

.059 TYP

.024

.074

.124

.139

.036

.075

.100

.200

.240

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" $\pm$.002"; COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

11/11

DENOTES PCB COPPER LAYOUT WITH SMOBC
(SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE _____

DIMENSIONS ARE IN INCHES

DRAWN

PW

11/14/06

TOLERANCES ON:

QUEKED

II

11/14/08

2 PL DECIMALS $\pm$
3 PL DECIMALS $\pm$.005

APPROVED

IL
IG

11/14/08

ANGLES $\pm$
FRACTIONS $\pm$

 Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

10

Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, 04AM03, DF782, GVA, TB-410-XX+

SIZE

CODE	IDENT
------	-------

DRAWING NO:

REV:

A

15542

98-PL-255

A

FILE: 98PL255



SCALE: 10:1

SHEET:

1 OF 1

ASHEETA1.DWG REV:A DATE:01/12/95

Evaluation Board and Circuit

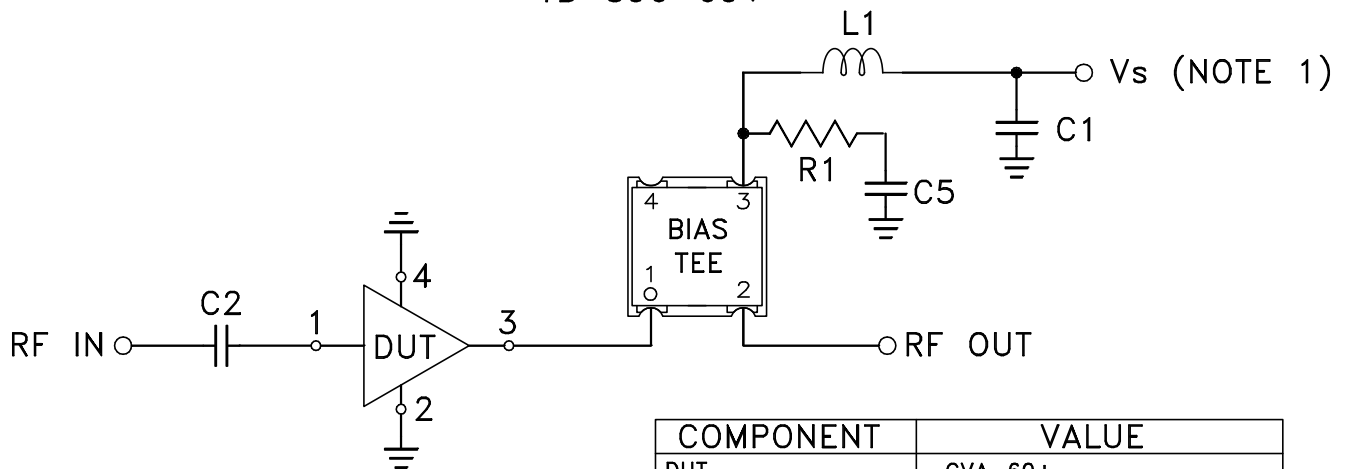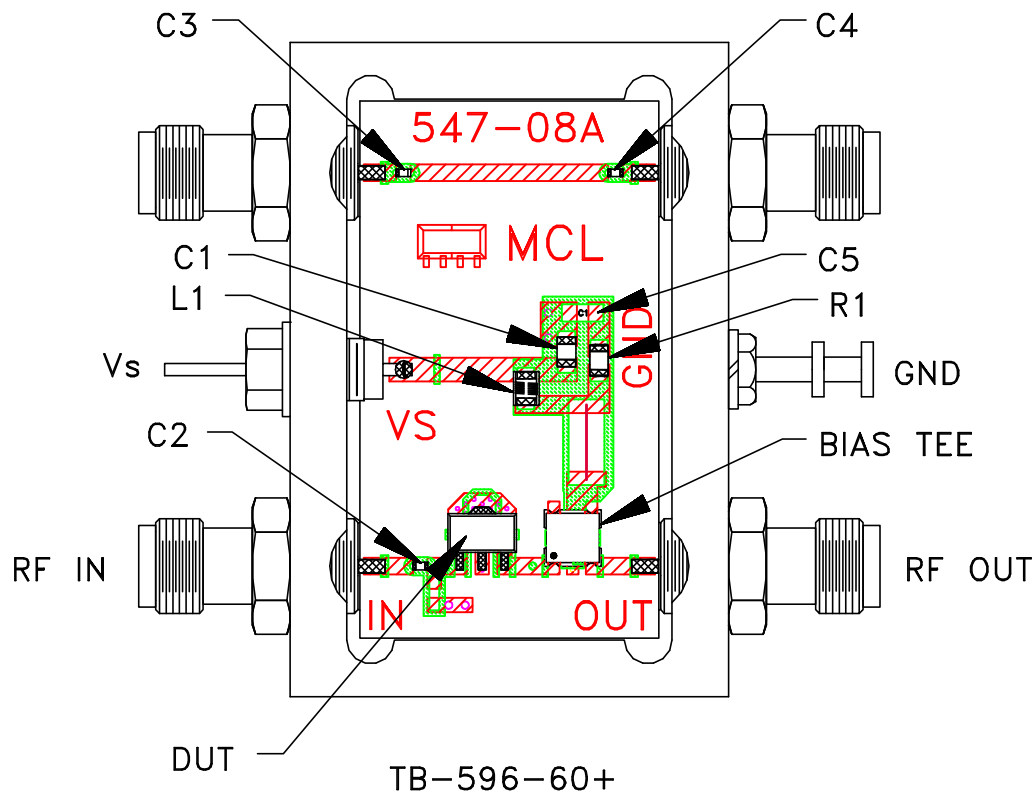

COMPONENT	VALUE
DUT	GVA-60+
C1,C5	0.1 uF(size 0805)
C2-C4 (Note 4)	0.001 uF(size 0402)
R1	33.2 Ohm
L1	43 nH
BIAS TEE	Mini-Circuits TCBT-14+

NOTES:

1. V_s voltage: +5±0.2V.
2. SMA Female connectors.
3. PCB material: Rogers RO4350 or equivalent, dielectric constant=3.5, dielectric thickness=.020 inch.
4. Capacitor C2-C4 should be free of resonance up to the highest frequency specified.

Mini-Circuits®



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85° C or -45° to 85° C or -55° to 105° C or -40° to 105° C or -40° to 95° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C or -65° to 150° Ambient Environment	Individual Model Data Sheet
HTOL	1000 hours at 125°C	MIL-STD-883, Method 1005, Condition B
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Mechanical Shock	1.5Kg, 0.5 ms, 5 shock pulses, Y1 direction only	MIL-STD-883, Method 2002, Condition B, except Y1 direction only
Vibration (Variable Frequency)	50g peak	MIL-STD-883, Method 2007, Condition B
Autoclave	15 psig, 100% RH, 121°C, 96 hours	JESD22-A102, Condition C
HAST	130°C, 85% RH, 96 hours	JESD22-A110
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Solder Reflow Heat	Sn-Pb Eutetic Process: 240°C peak Pb-Free Process: 260°C peak	J-STD-020, Table 4-1, 4-2 and 5-2; Figure 5-1
Moisture Sensitivity: Level 1	Bake at 125°C for 24 hours Soak at 85°C/85% RH for 168 hours, Reflow 3 cycles at 260°C peak	J-STD-020



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215