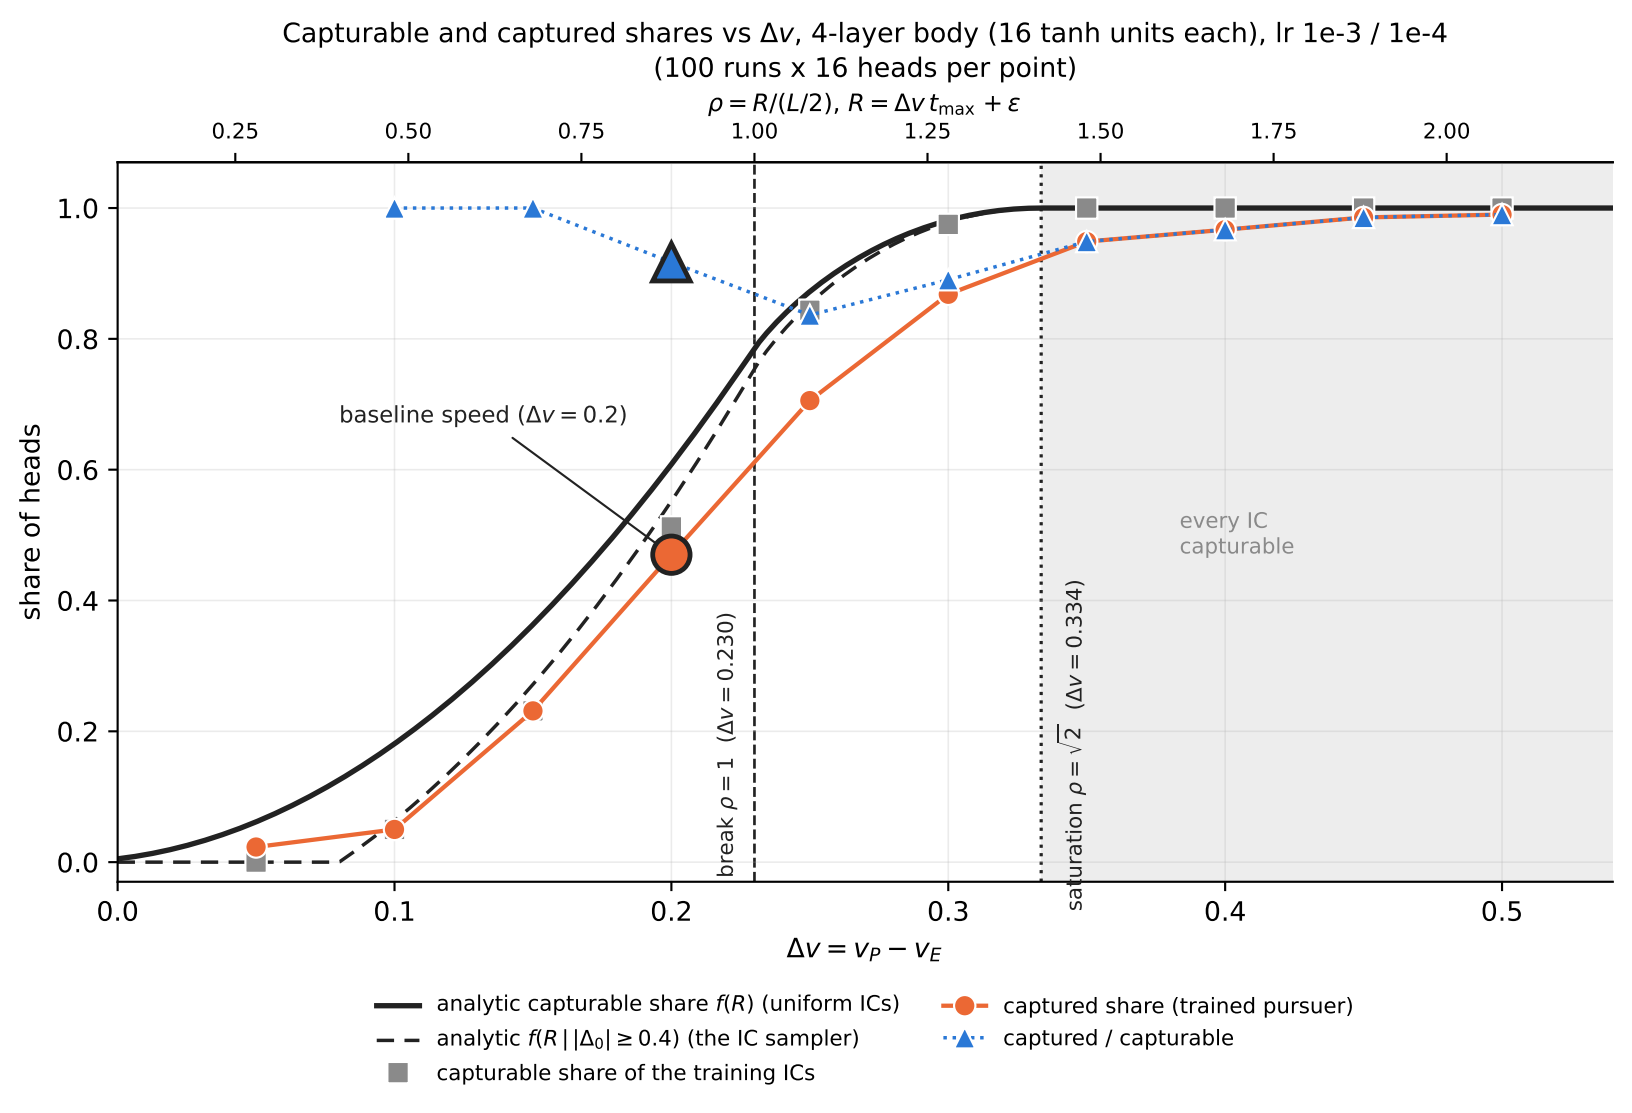
Capturable and captured shares vs Δv, 4-layer body (16 tanh units each), lr 1e-3 / 1e-4
(100 runs x 16 heads per point)
ρ = R/(L/2), R = Δv t_max + ε
0.25
0.50
0.75
1.00
1.25
1.50
1.75
2.00
share of heads
0.0
0.2
0.4
0.6
0.8
1.0
baseline speed (Δv = 0.2)
every IC
capturable
break ρ = 1 (Δv = 0.230)
saturation ρ = √2 (Δv = 0.334)
0.0
0.1
0.2
0.3
0.4
0.5
Δv = v_P − v_E
analytic capturable share f(R) (uniform ICs)
analytic f(R | |Δ_0| ≥ 0.4) (the IC sampler)
capturable share of the training ICs
captured share (trained pursuer)
captured / capturable