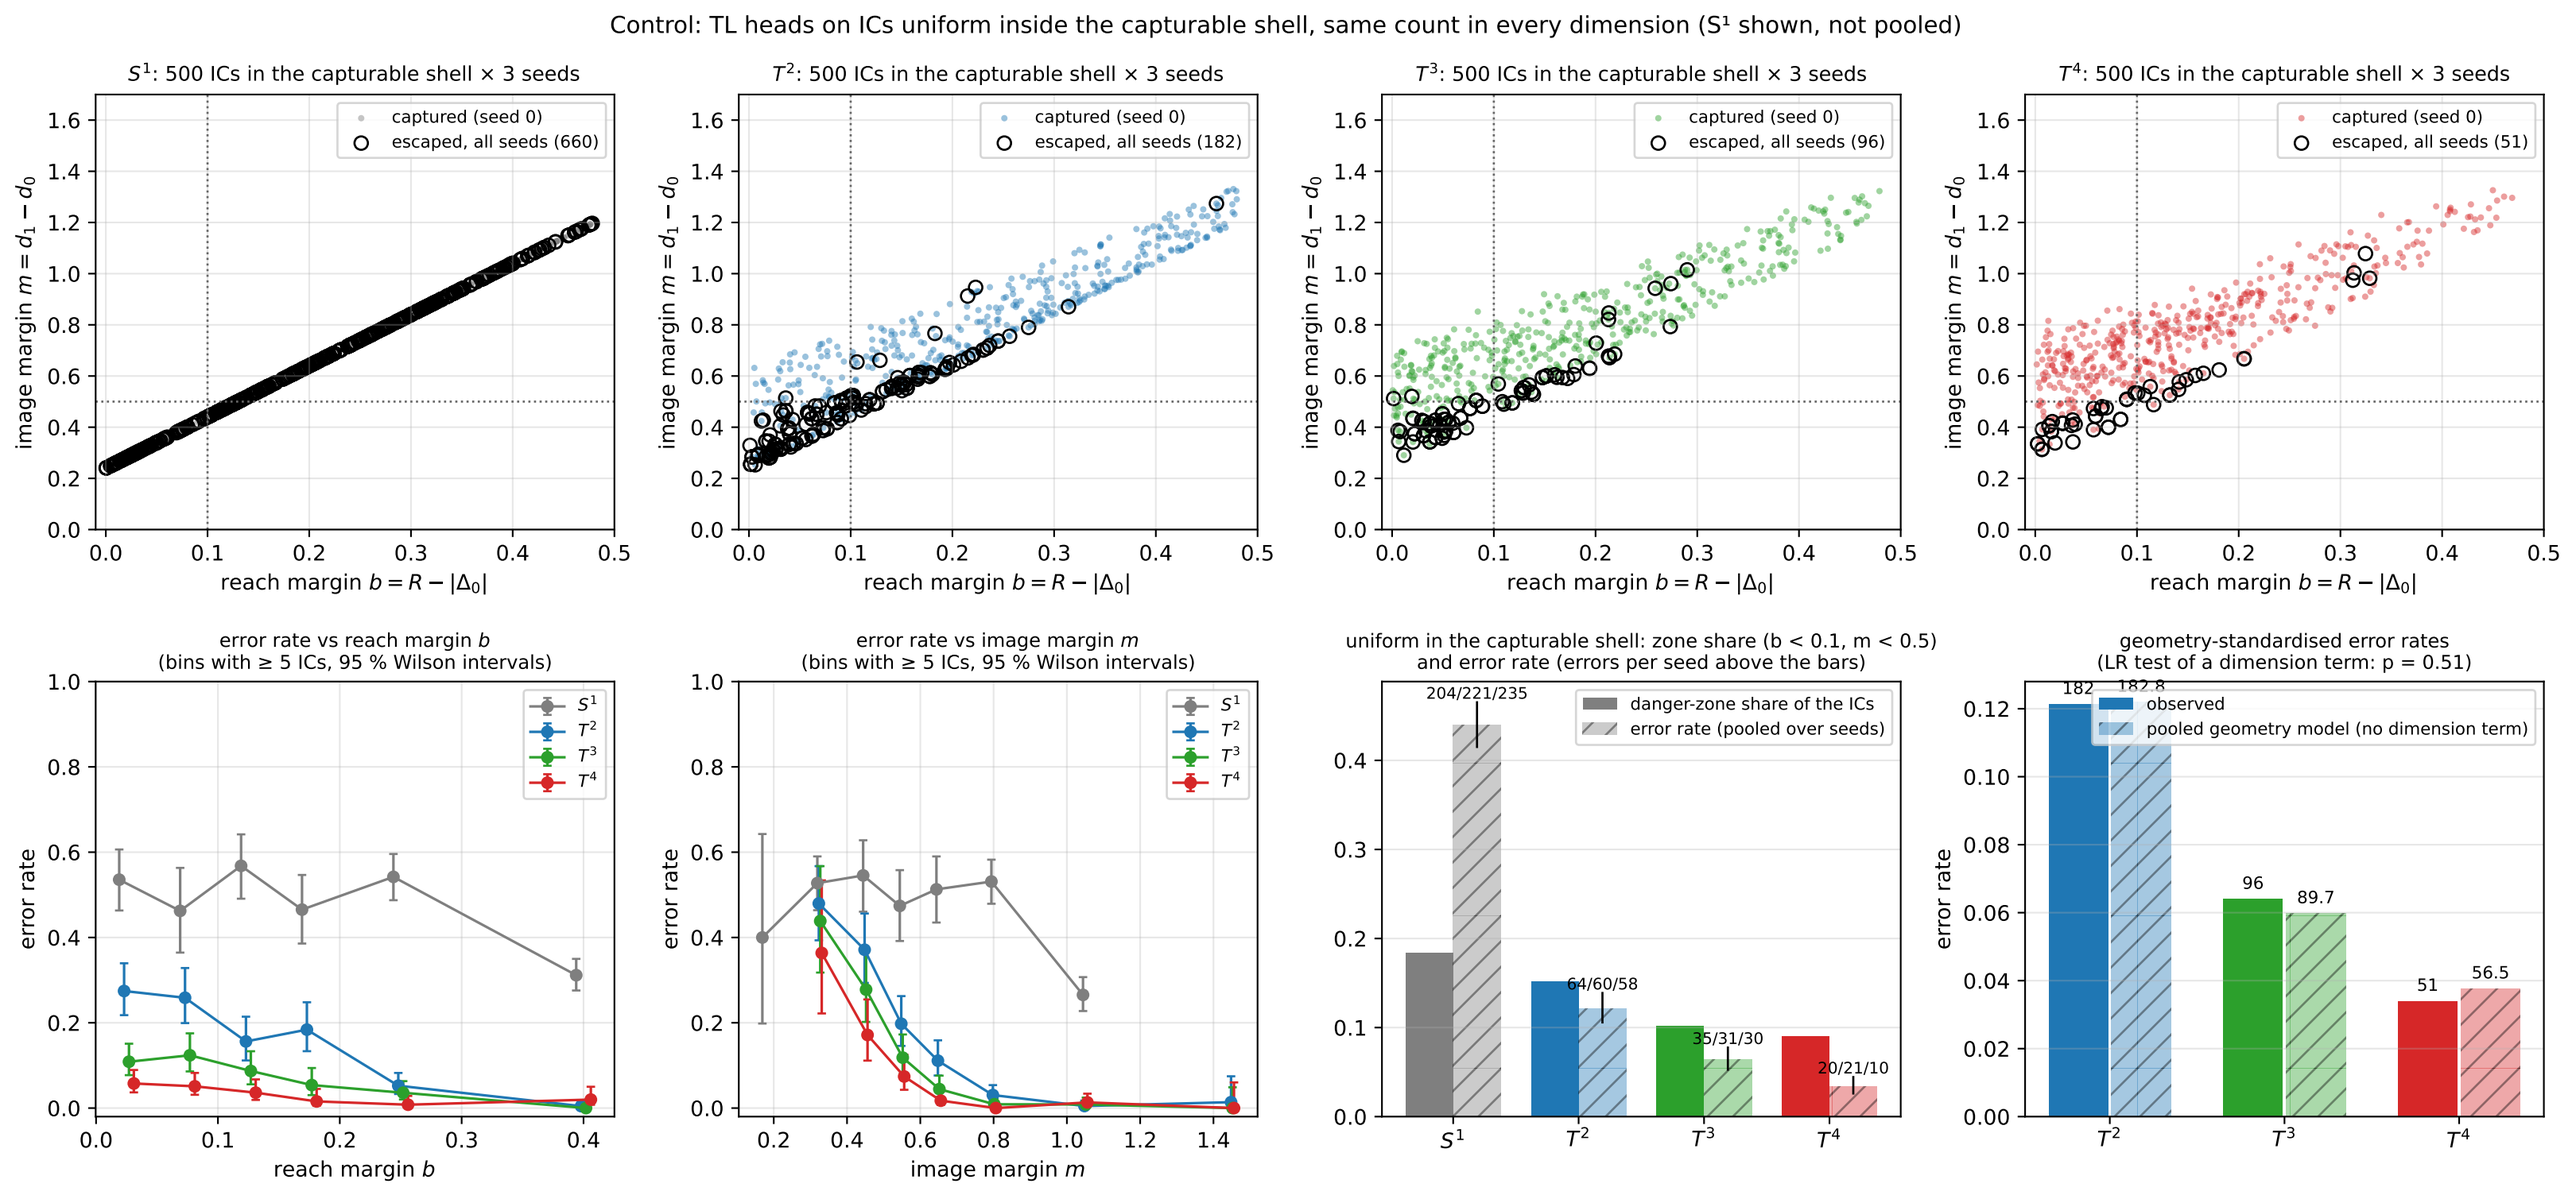

Control: TL heads on ICs uniform inside the capturable shell, same count in every dimension (S¹ shown, not pooled)
S¹: 500 ICs in the capturable shell × 3 seeds
captured (seed 0)
escaped, all seeds (660)
T²: 500 ICs in the capturable shell × 3 seeds
captured (seed 0)
escaped, all seeds (182)
T³: 500 ICs in the capturable shell × 3 seeds
captured (seed 0)
escaped, all seeds (96)
T⁴: 500 ICs in the capturable shell × 3 seeds
captured (seed 0)
escaped, all seeds (51)
image margin m = d₁ − d₀
reach margin b = R − |Δ₀|
error rate vs reach margin b
(bins with ≥ 5 ICs, 95 % Wilson intervals)
error rate
reach margin b
error rate vs image margin m
(bins with ≥ 5 ICs, 95 % Wilson intervals)
image margin m
uniform in the capturable shell: zone share (b < 0.1, m < 0.5)
and error rate (errors per seed above the bars)
danger-zone share of the ICs
error rate (pooled over seeds)
204/221/235
64/60/58
35/31/30
20/21/10
geometry-standardised error rates
(LR test of a dimension term: p = 0.51)
observed
pooled geometry model (no dimension term)
182
182.8
96
89.7
51
56.5