
CONTROL

inflow $u(y)$, fixed flow rate

PROCESS

steady, Re = 20

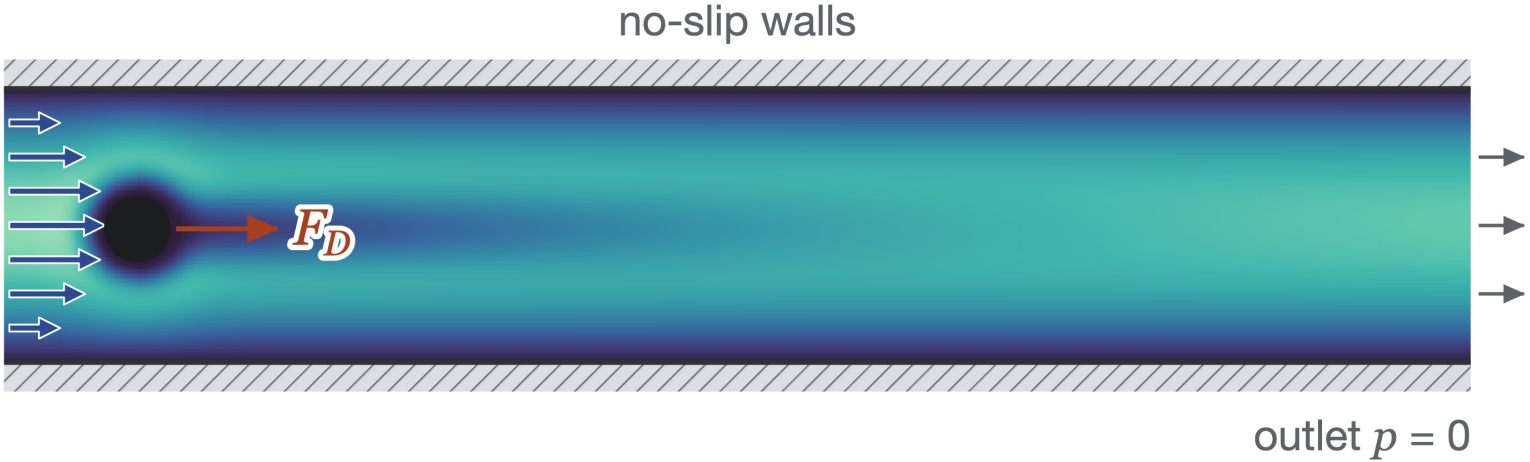

OBJECTIVE $\min_u F_D$