



MEASURES

PLAN

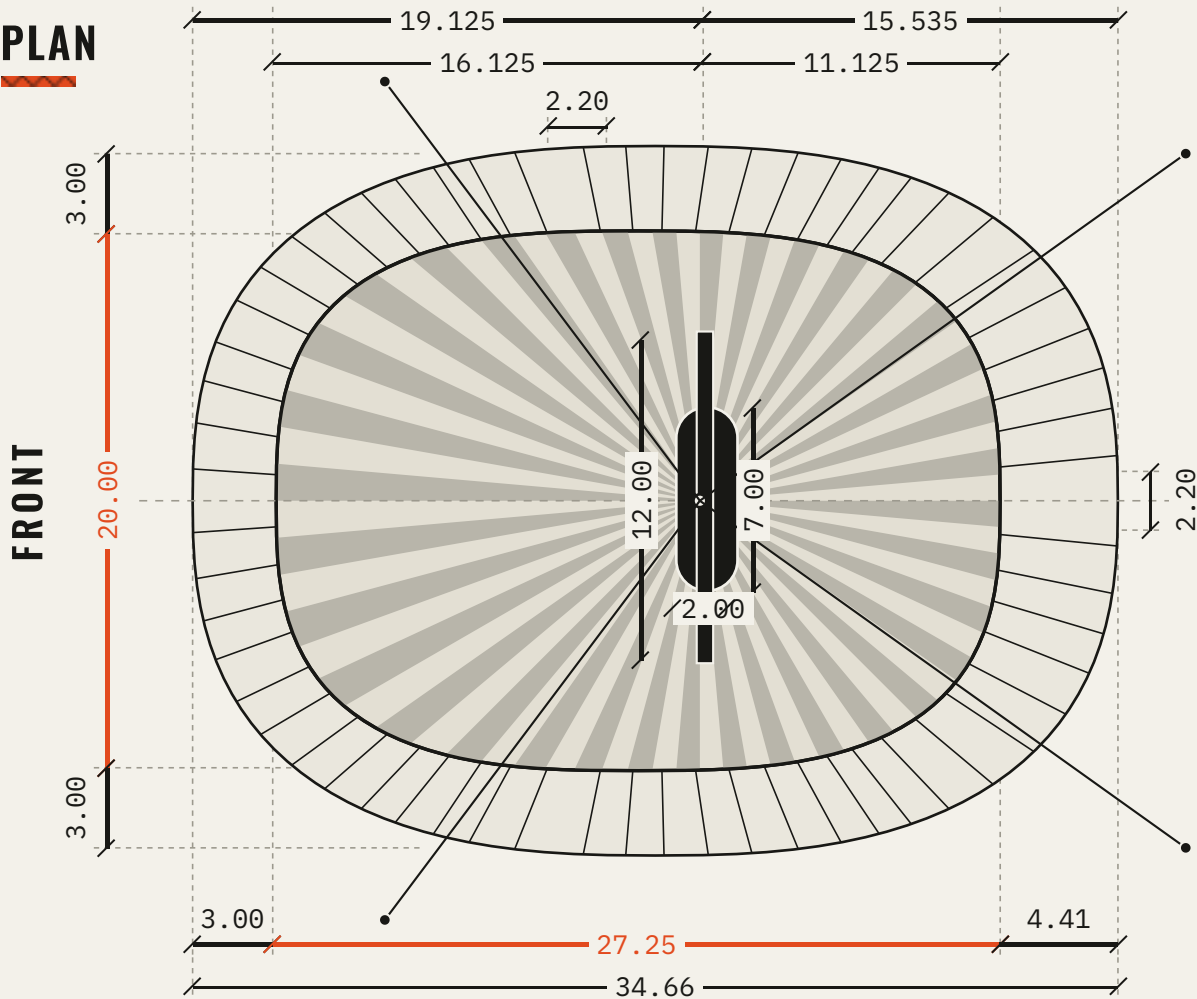

SIDE VIEW

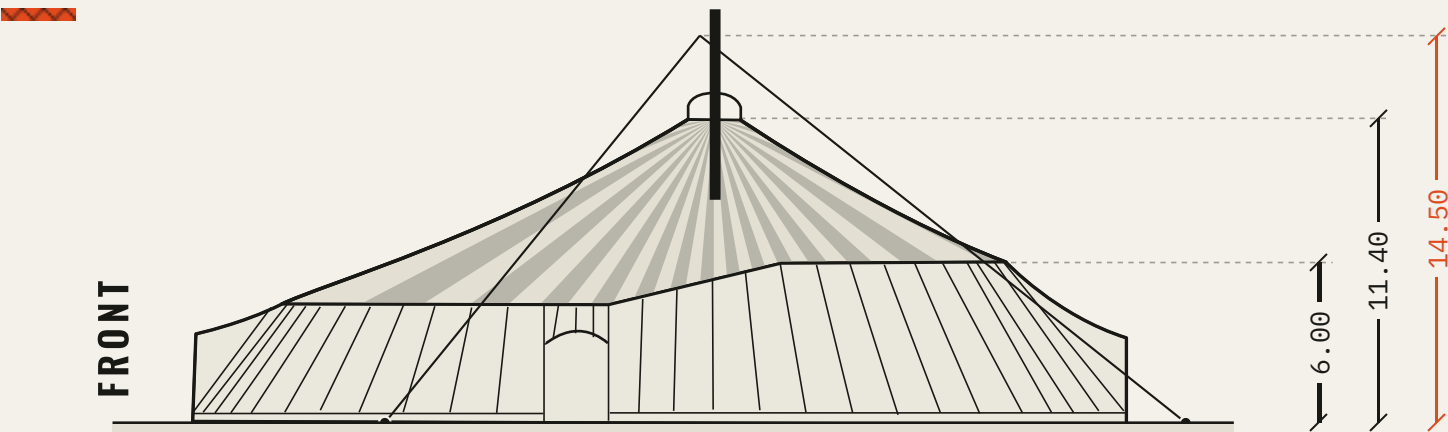

NOTES

- 1. Four entrances, 2.20 m wide each.
- 2. Cables run from the mast head to four anchors.


LEGEND

- | | |
|-------------------|------------------|
| ROOF, LIGHT PANEL | ROOF, DARK PANEL |
| SIDEWALL RING | MAST & RIDGE |
| CABLE | ANCHOR (4) |

NAILS

IMPORTANT

Except for the key nails, place each nail 25 cm beyond the mark given by the triangulation, further away from the tent.

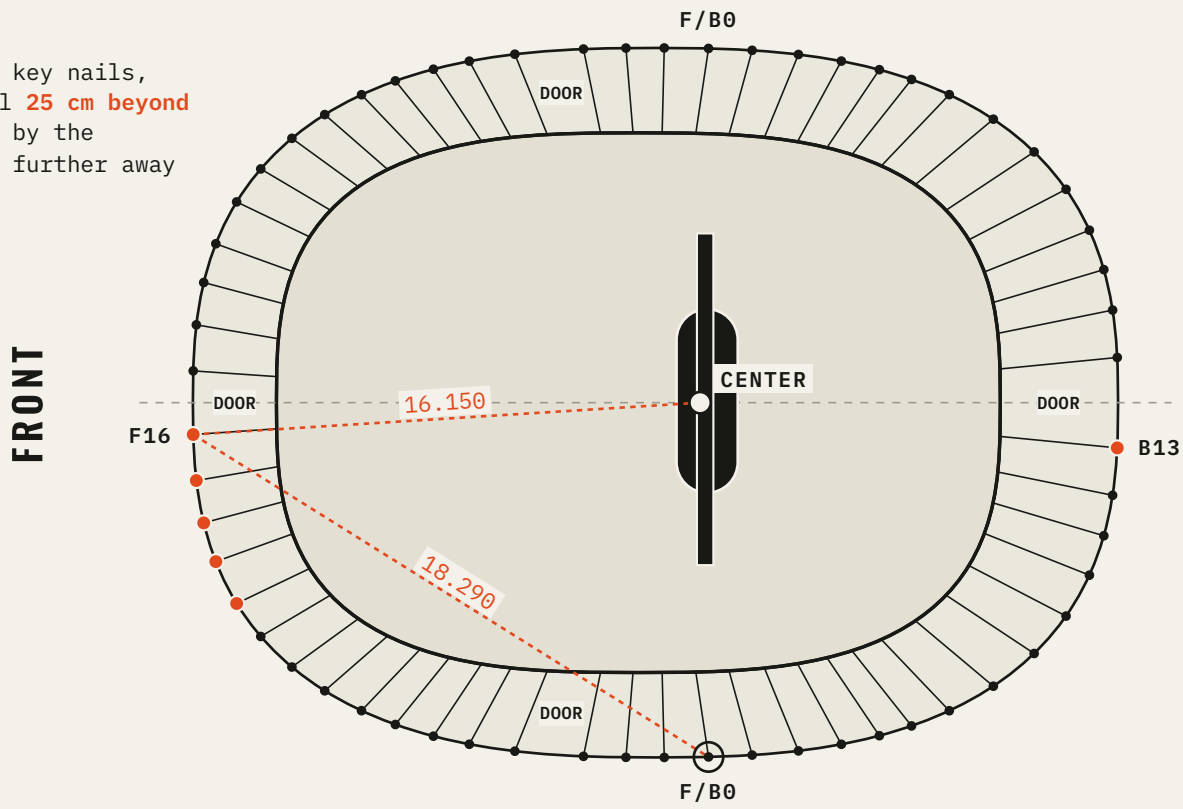

NAILS FRONT · LONG SIDE

NAIL	CENTER	NAIL 0
F/B0	13.240	0.000
F1	13.325	1.330
F2	13.545	2.685
F3	13.895	4.030
Door	0.000	0.000
F4	14.710	6.280
F5	15.525	8.005
F6	16.490	9.750
F7	17.515	11.495
F8	18.345	13.190
F9	18.940	14.775
F10	19.293	16.205
F11	19.525	17.535
F12	19.635	18.760
F13	19.640	19.875
F14	19.585	20.920
F15	19.515	21.925
F16	19.460	22.895
MAX	19.640	22.895

NAILS BACK · SHORT SIDE

NAIL	CENTER	NAIL 0
F/B0	13.240	0.000
B1	13.345	1.770
B2	13.690	3.535
B3	14.185	5.300
B4	14.710	7.060
B5	15.195	8.790
B6	15.590	10.465
B7	15.870	12.065
B8	15.985	13.555
B9	16.000	14.945
B10	15.955	16.265
B11	15.905	17.535
B12	15.870	18.760
B13	15.890	19.950
MAX	16.000	19.950


NOTES

1. Start at nail F/B0 on the front long side; measure each nail from the centre and from nail 0.
2. Doors have no nails.

LEGEND

- ROOF
- MAST & RIDGE
- MEASURE LINE
- SIDEWALL RING
- NAIL

POLES

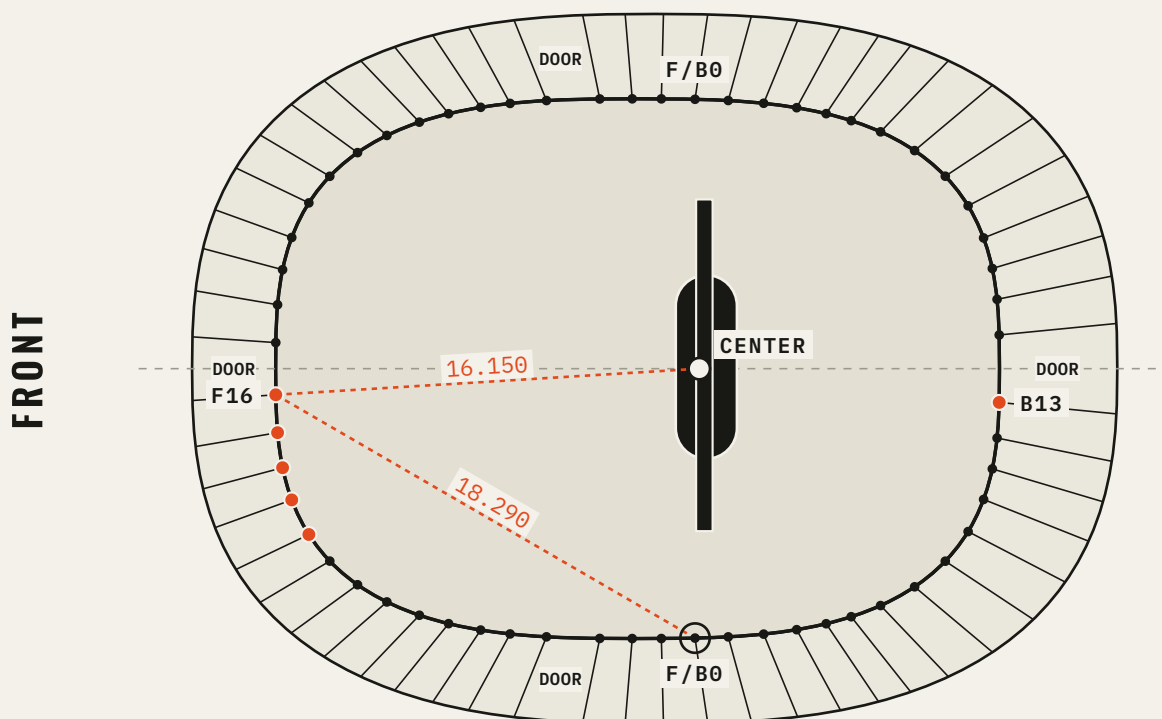

POLES FRONT · LONG SIDE

POLE	CENTER	POLE 0
F/B0	9.970	0.000
F1	10.050	1.290
F2	10.300	2.575
F3	10.695	3.865
Door	0.000	0.000
F4	11.870	6.440
F5	12.615	7.730
F6	13.445	9.020
F7	14.340	10.305
F8	15.210	11.570
F9	15.750	12.740
F10	16.105	13.785
F11	16.280	14.700
F12	16.340	15.510
F13	16.315	16.250
F14	16.255	16.940
F15	16.195	17.620
F16	16.150	18.290
MAX	16.340	18.290

POLES BACK - SHORT SIDE

POLE	CENTER	POLE 0
F/B0	9.970	0.000
B1	10.055	1.390
B2	10.295	2.595
B3	10.695	3.895
B4	11.205	5.190
B5	11.715	6.475
B6	12.090	7.710
B7	12.145	8.795
B8	12.070	9.790
B9	11.900	10.700
B10	11.675	11.560
B11	11.455	12.395
B12	11.280	13.235
B13	11.165	14.085
MAX	12.145	14.085


NOTES

1. Start at pole F/B0 on the front long side; measure each pole from the centre and from pole 0.
2. Doors have no poles.

LEGEND

-  ROOF
  SIDEWALL RING
-  MAST & RIDGE
  POLE
- MEASURE LINE


SPECIAL POLES

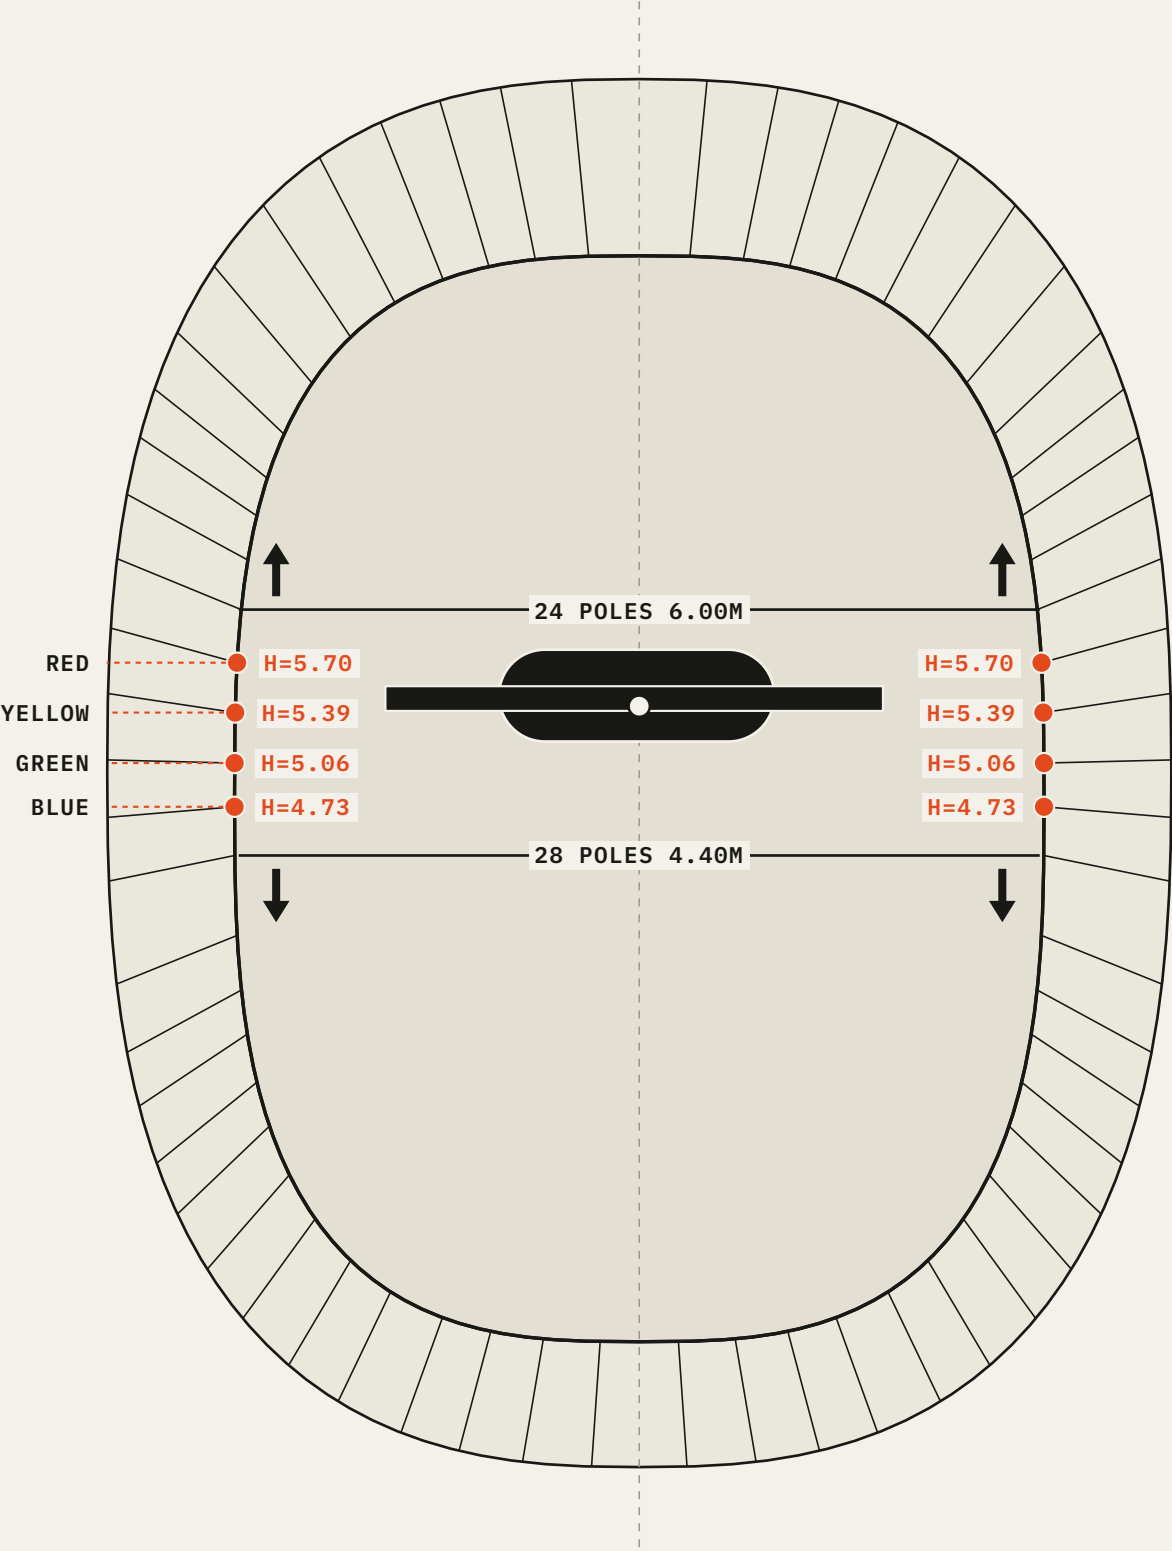

NOTES

- Four special poles per long side, between the 24-pole and the 28-pole groups.
- 24 poles at 6.00 m, 28 poles at 4.40 m.

TIREFORTS

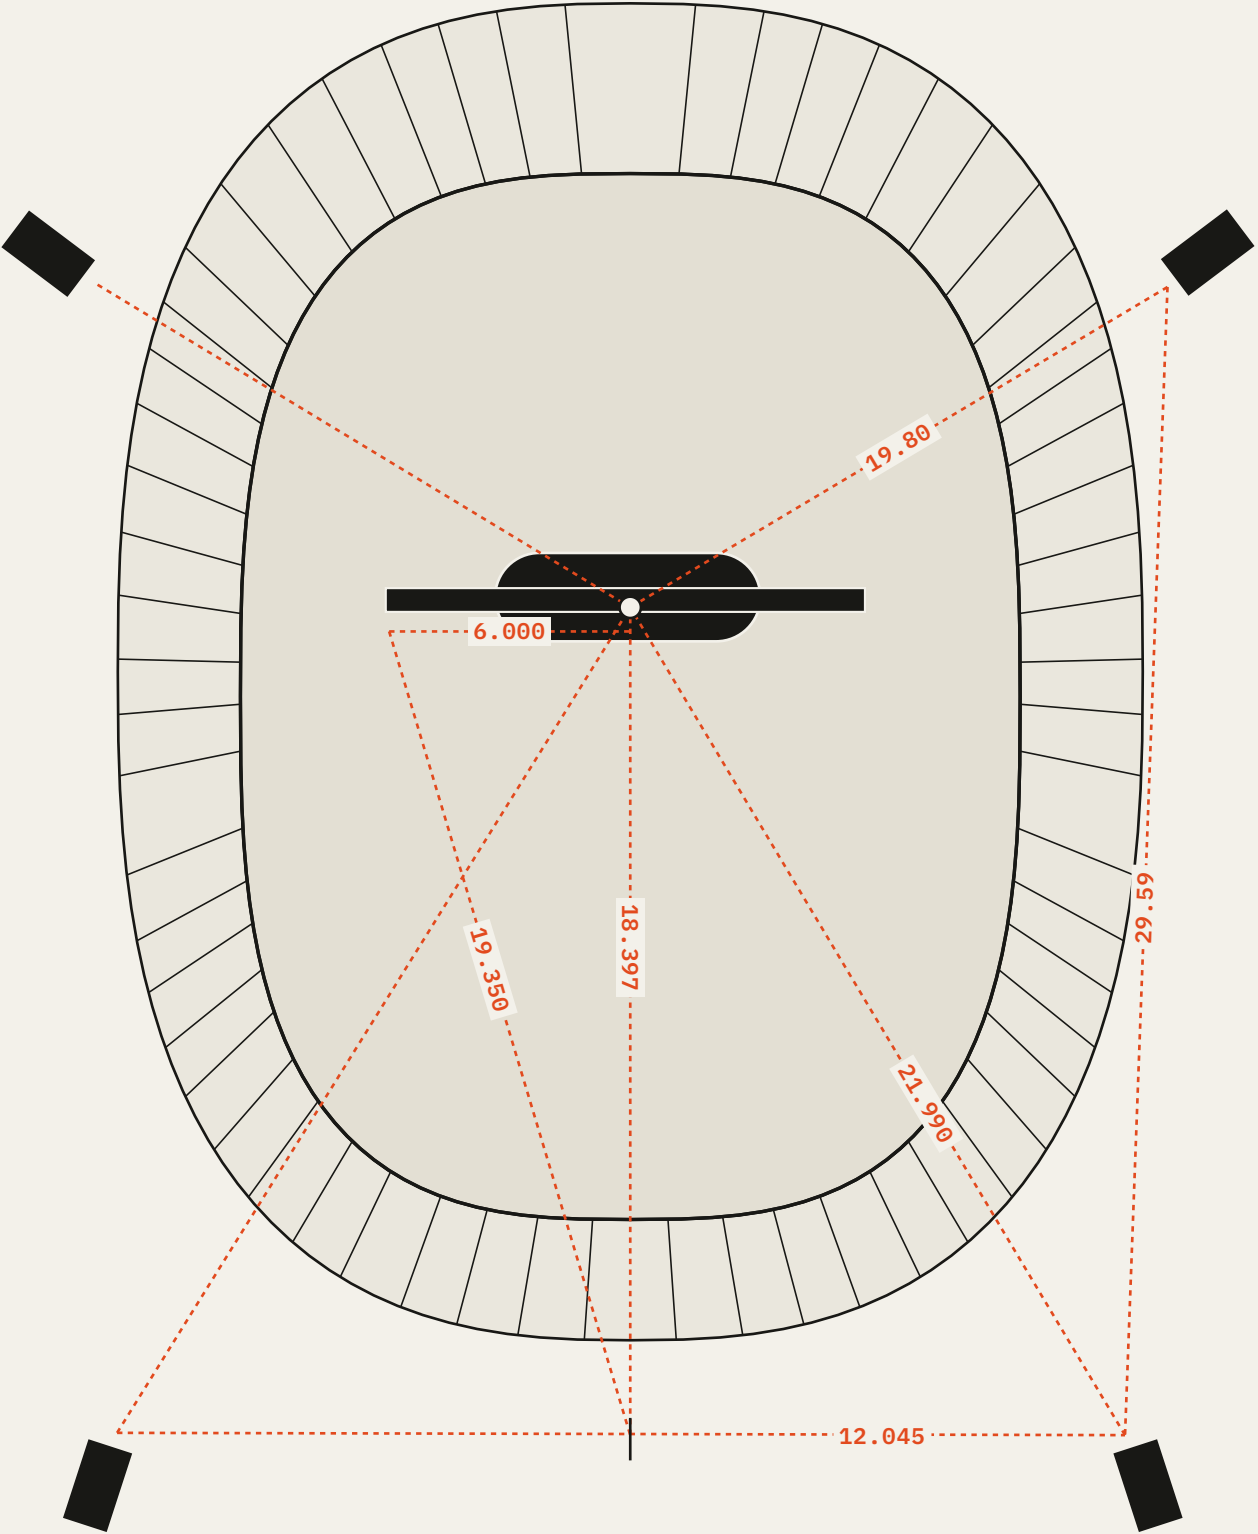

NOTES

- 1. Four tireforts, one at each corner, measured from the centre of the mast.

LEGEND

- | | |
|--------------|---------------|
| ROOF | SIDEWALL RING |
| MAST & RIDGE | TIREFORT |
| MEASURE LINE | |

MOLTONS

8 × A

2 × B


6 × C

INSTRUCTIONS

1. Start from molton B.
2. The door opening goes between the yellow and green poles.

IMPORTANT!

Each molton overlaps the next by 3 hooks.

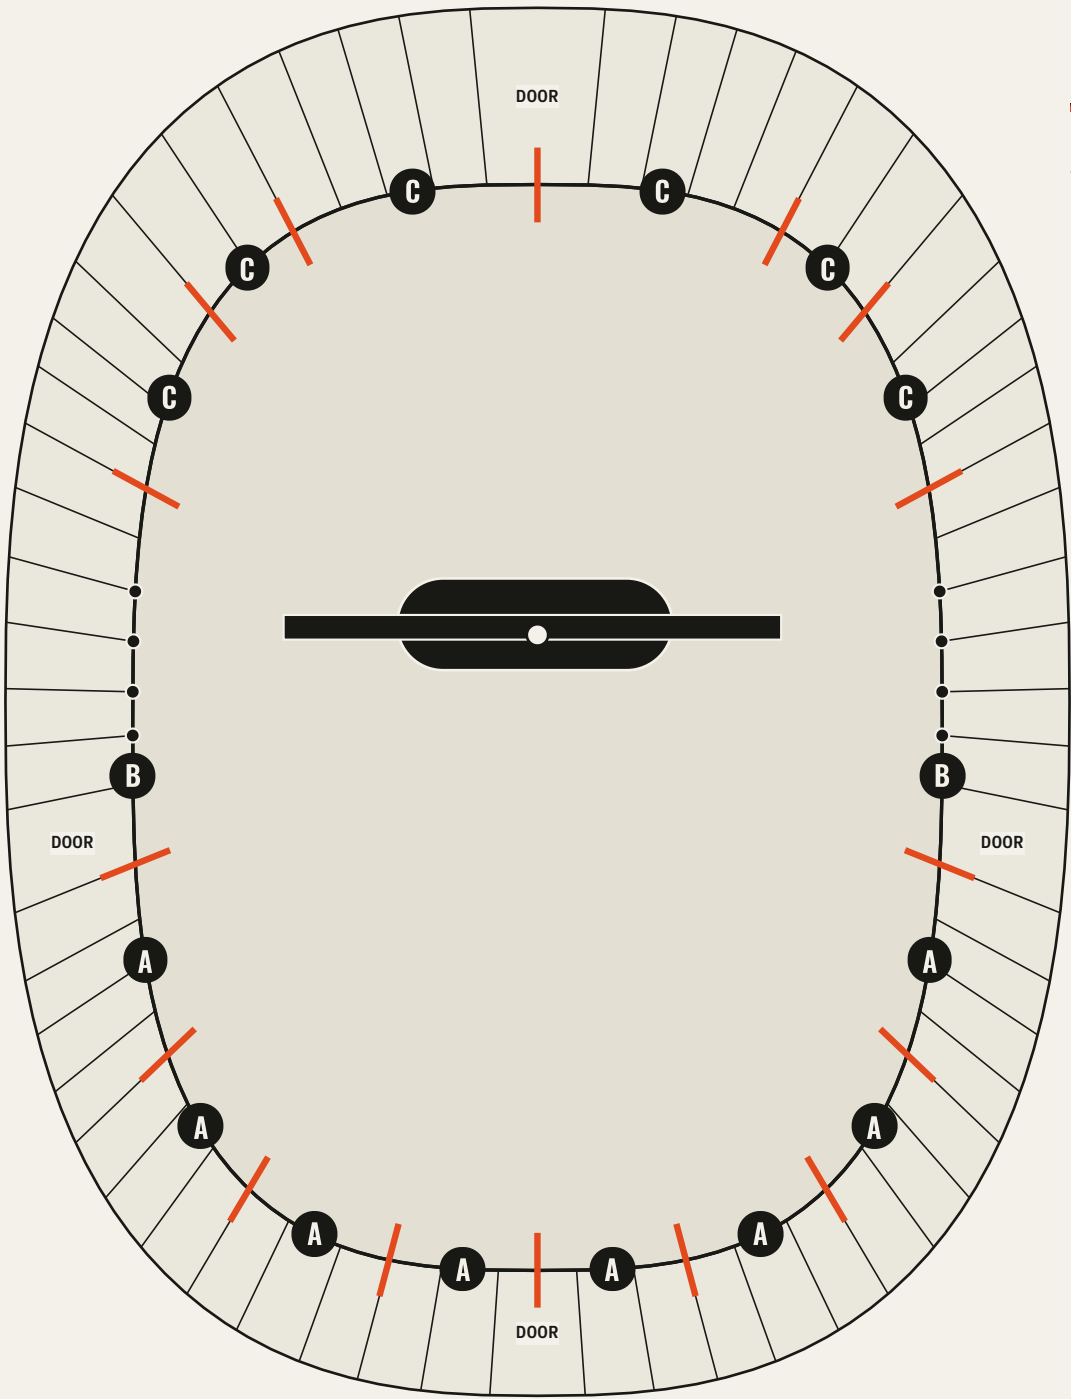

NOTES

1. Letters A, B and C name the type of each molton.
2. Marks show where one molton ends and the next begins.

LEGEND

- ROOF

MAST & RIDGE


SPECIAL POLE
- SIDEWALL RING

MOLTON JOINT

SIDEWALLS

IMPORTANT!

Follow the letters written on **the tape** on the fabrics, not the ones welded into the fabric: those are old.

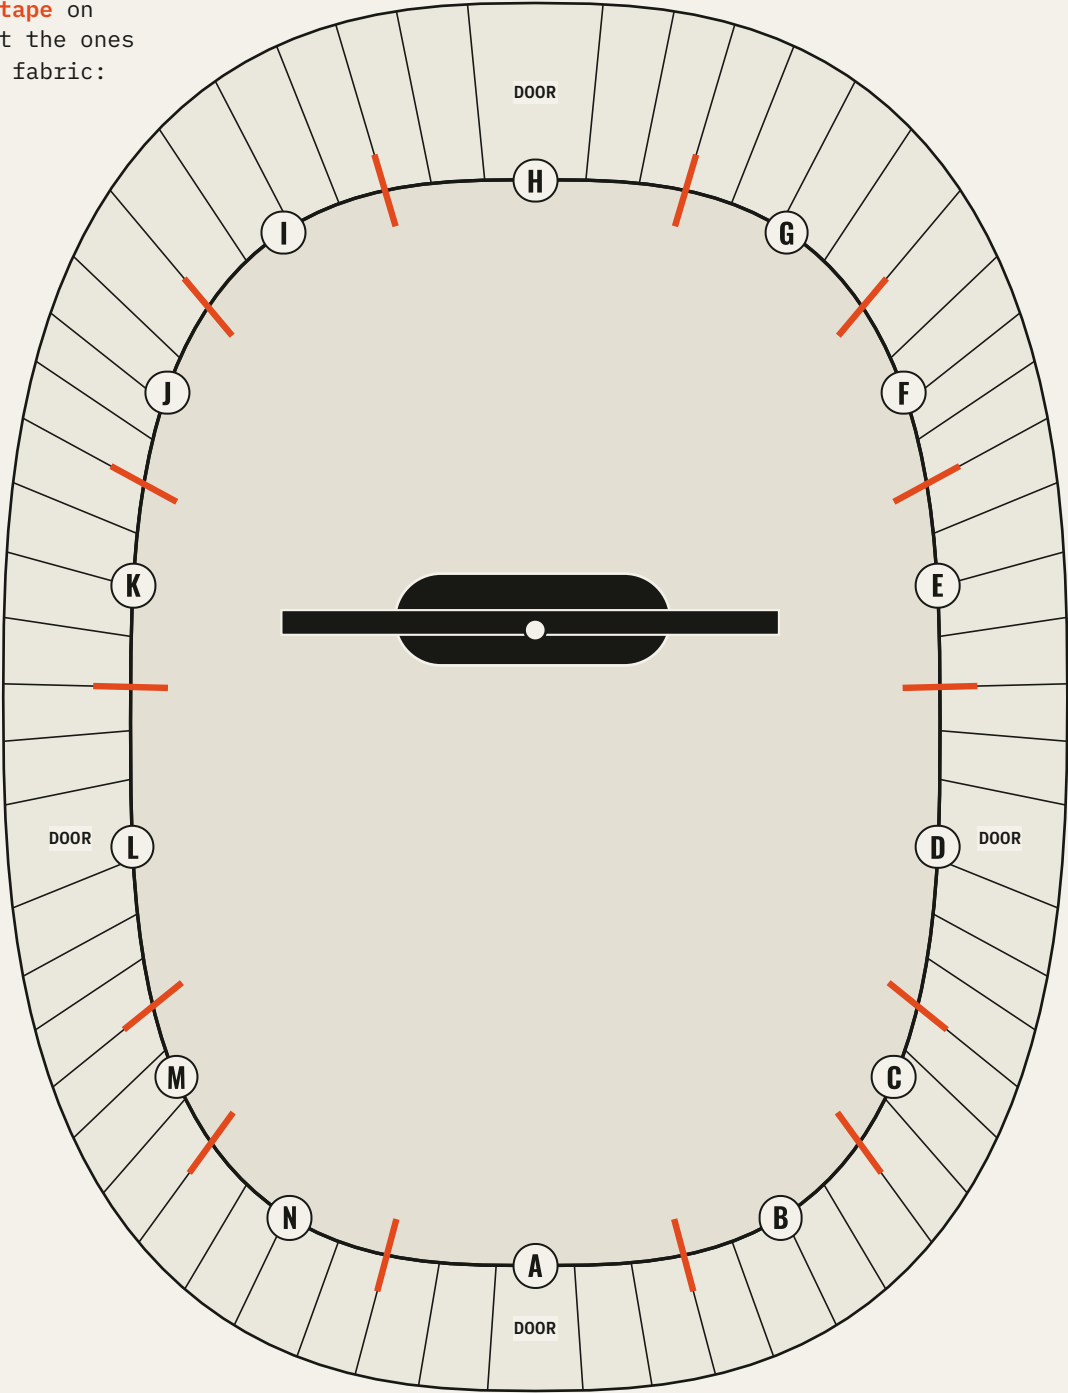


NOTES

- 1. Letters A to N name each sidewall.
- 2. Marks show where one sidewall ends and the next begins.


LEGEND

- | | |
|--|--|
|  ROOF |  SIDEWALL RING |
|  MAST & RIDGE |  SIDEWALL JOINT |

TRIBUNE

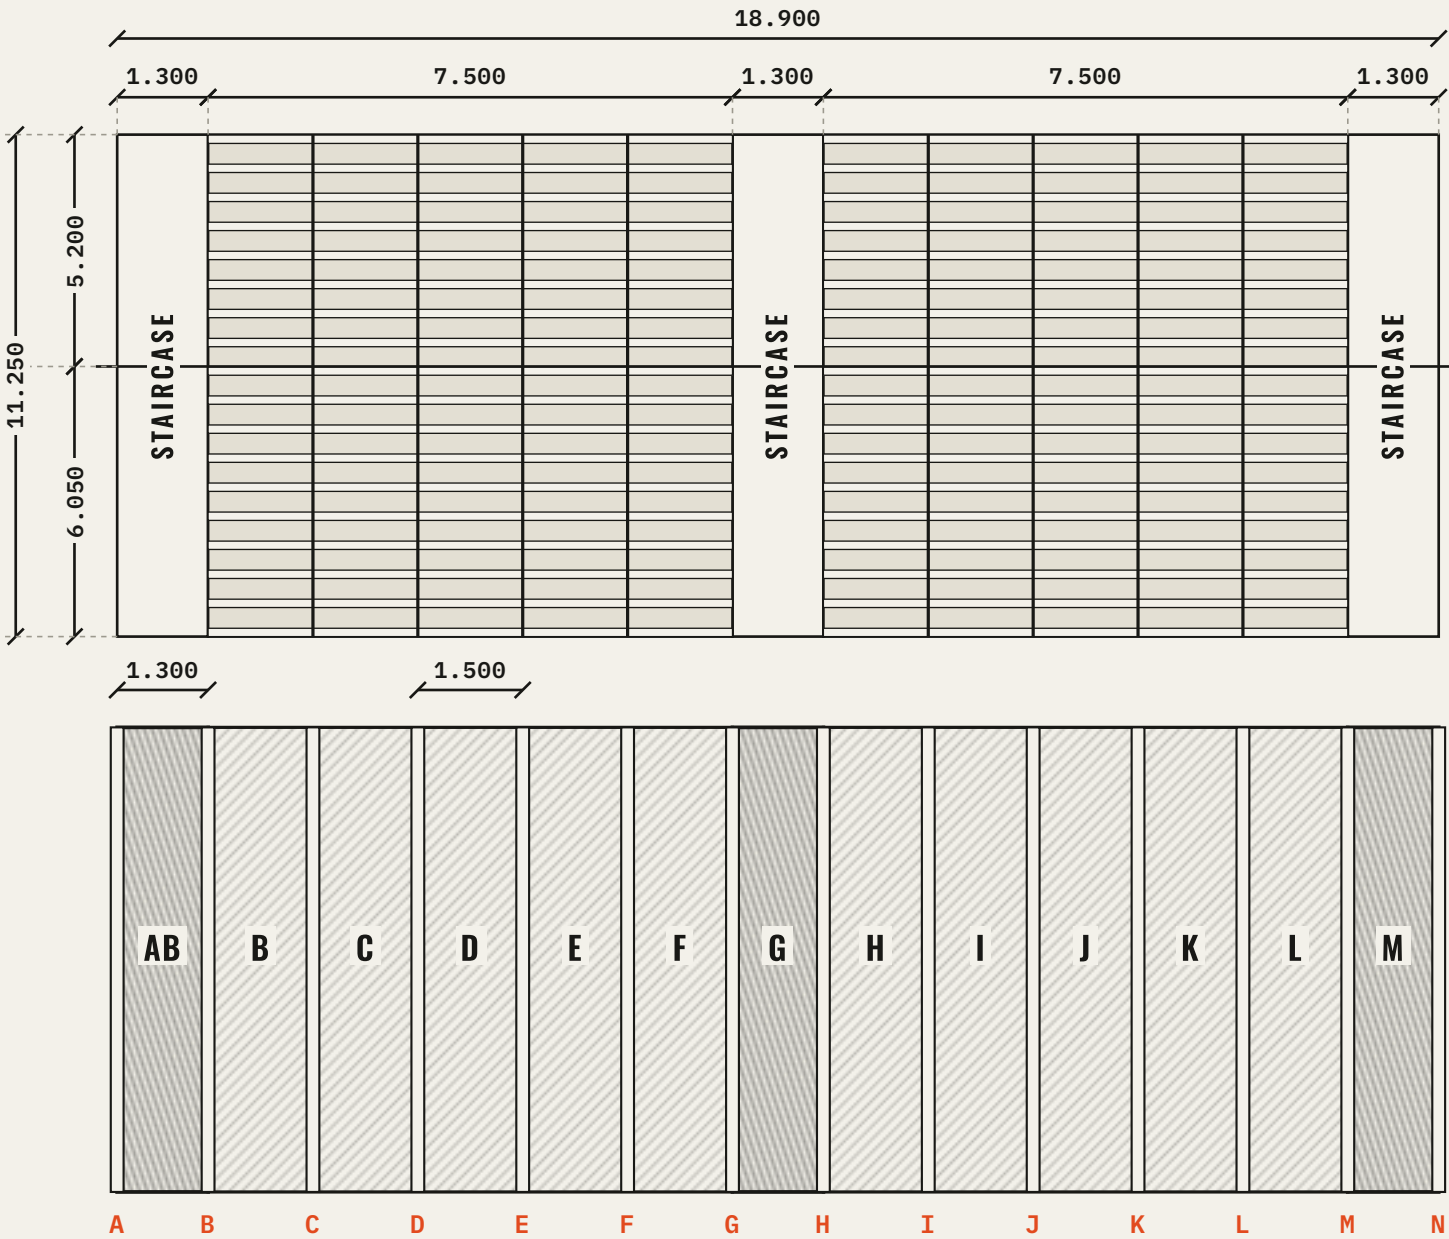

The distance between the antenna and the beginning of the tribune should be at least 1.20 m for a wheelchair to pass by.

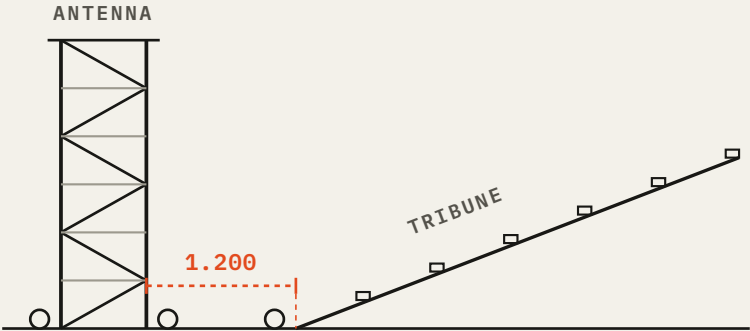

NOTES

1. First wood is AB. (We don't know why :)

LEGEND

- STAIRCASE
- METAL POST

- WOOD, A TO M
- DISTANCE TO KEEP