


GM-101 GENEVAWHEEL_6SLOT 4140 QT, FLANKS IND. HARDENED, QTY 1, 1451.5 g (INVENTOR), SCALE 1:1, ENVELOPE 173.3 x 162.7 x 14.0 MM
R87 x 14; 6 SLOTS 16 +0.04/+0.08 RADIAL, END R8.03 CENTRED AT r 49; 6 LOCKING ARCS R36.10
+0.02/0 CENTRED ON 100 AT 30 DEG TO THE SLOTS; BORE 20 H7, KEYWAY 6 JS9 x 2.8 AT 90 DEG; WIRE EDM, FLANKS 50 HRC

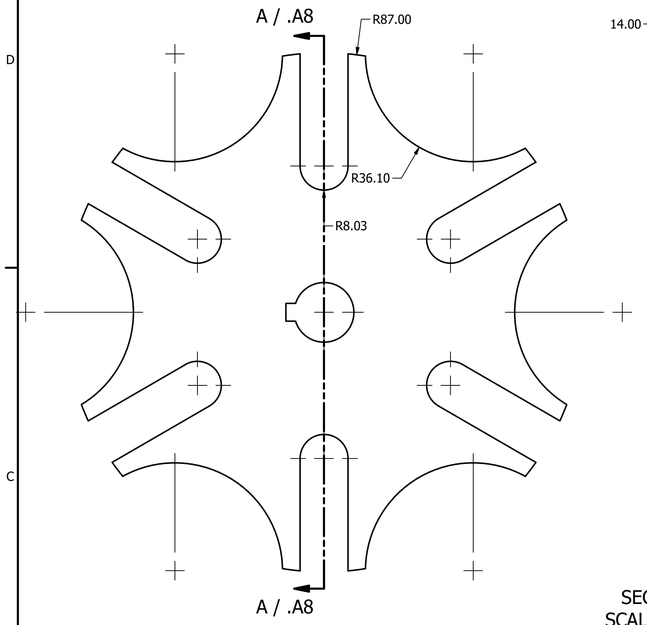





SECTION A-A
SCALE 1 : 1 / .C7




GM-102 DRIVER_CRANKLOCKINGDISC 4140 QT, QTY 1, 496.9 g (INVENTOR), SCALE 2:1, ENVELOPE 101.0 x 72.0 x 32.6 MM
ARM: KR16 STUD BORE 6 H7 AT r 50.00 +/-0.01, EYE R15, BOSS 13 x 2; LOCKING DISC R36 g6 x 15.7
WITH RELIEF R76 CENTRED 85 ON THE ROLLER SIDE; HUB 36, LAND 26 x 0.9; BORE 20 H7 + KEY 6; M5 SET SCREW

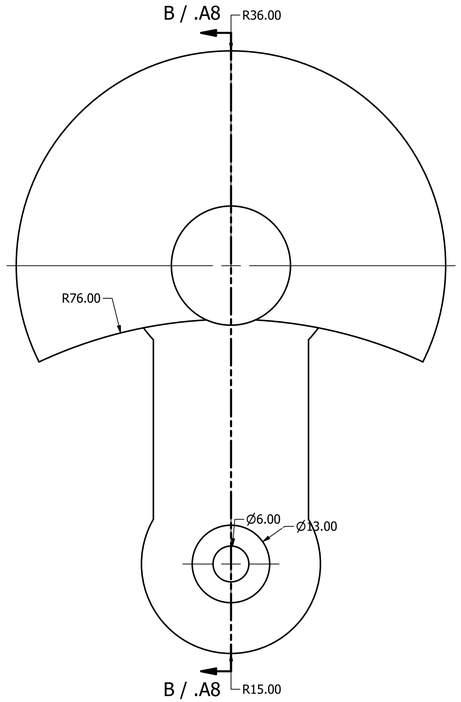

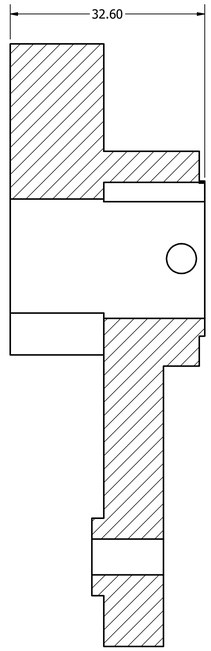


SECTION B-B
SCALE 2 : 1 / .C4




NOTES:
1. 6061-T6 / 1045 CD / 4140 QT: MACHINE, BREAK SHARP EDGES 0.3. UNTOLERANCED DIMS +/-0.1 (TURNED), +/-0.2 (MILLED).
2. BEARING SEATS 47 K6 (6204-2RSH), SHAFT SEATS 20 h6 / 17 k6; WHEEL AND DRIVER BORES 20 H7; KEYWAYS DIN 6885 (HUB JS9, SHAFT P9).
3. GENEVA: CENTRE DISTANCE 100.00 +/-0.01 (BEARING PLATES LINE-BORED TOGETHER); CRANK RADIUS 50.00 +/-0.01; SLOT 16 +0.04/+0.08, SLOT FLANKS AND LOCKING ARCS INDUCTION HARDENED 50 HRC MIN, Ra 0.8; LOCKING DISC R36 g6, WHEEL ARCS R36.10 +0.02/0.
4. ALL DIMENSIONS MM. ROTATING PARTS: Z = AXIS, Z IN WORLD HEIGHT ABOVE THE BENCH. SOURCE: _build/design.py + build_parts.py.

DRAWN Jay Patel	10/29/2026	
CHECKED		
QA		TITLE: GenevaMechanism - manufacturing drawings
MFG		
APPROVED		SIZE D · DWG NO GM-DWG-100 · REV
		SCALE 1 : 1 · SHEET 1 OF 4


GM-104 WHEELSHAFT_20-24-17 1045 CD, QTY 1, 256.8 g (INVENTOR), SCALE 1.5:1, ENVELOPE 105.5 x 24.0 x 24.0 MM
20 h6 (LOWER 6204), COLLAR 24 x 18.7 (SEATS THE WHEEL), 20 h6 TO z 292, 17 k6 HUB SEAT;
KEYWAYS 6 P9 x 3.5 x 14 (WHEEL) AND 5 P9 x 3 x 16 (HUB), BOTH ON +Y

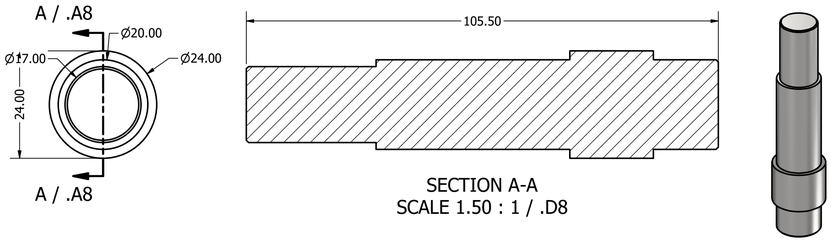


GM-103 CRANKSHAFT_20X93.5 1045 CD GROUND, QTY 1, 228.4 g (INVENTOR), SCALE 2:1, ENVELOPE 93.5 x 20.0 x 20.0 MM
20 h6 x 93.5 GROUND; 2 x 6204 SEATS; KEYWAY 6 P9 x 3.5 x 14 FOR THE DRIVER;
PLAIN END 19 LONG IN THE MJC41 CLAMP HUB

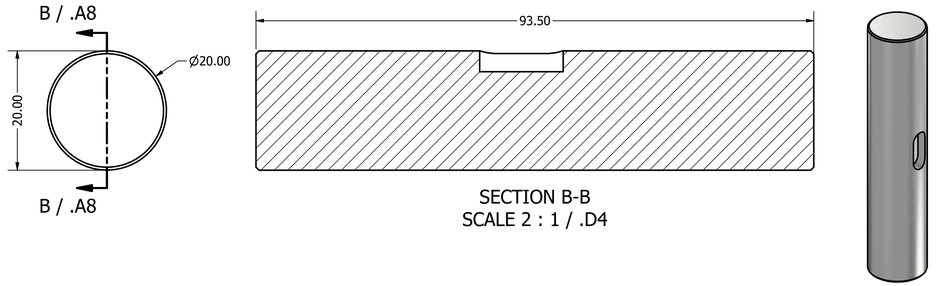

GM-208 TABLEHUB 1045, QTY 1, 587.5 g (INVENTOR), SCALE 1:1, ENVELOPE 90.0 x 90.0 x 30.0 MM
BORE 17 H7 + KEYWAY 5 JS9 x 2.3; BOSS 36 x 20, FLANGE 90 x 10; 6 X M6 THRU ON 70 PCD AT 30 DEG; M6 SET SCREW

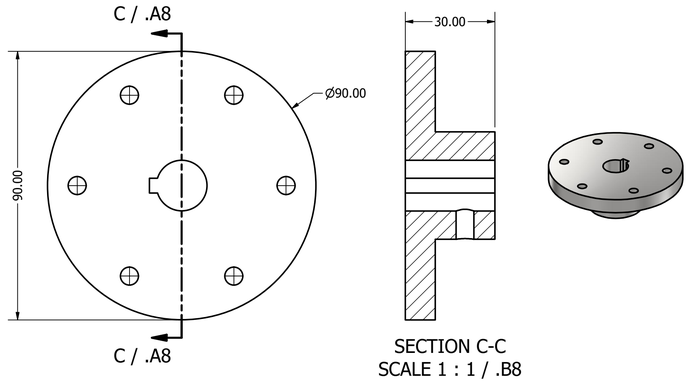


GM-105 WHEELSPACER 1045, QTY 1, 11.9 g (INVENTOR), SCALE 2:1, ENVELOPE 26.0 x 26.0 x 7.2 MM
26 / 20.2 x 7.2; FACES PARALLEL 0.01 (SETS 0.1 AXIAL FLOAT)

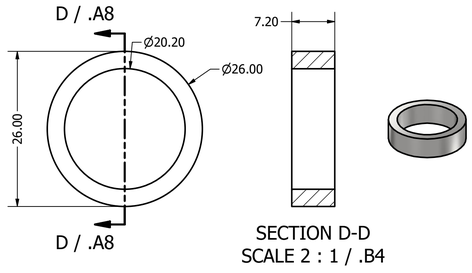


NOTES:
1. 6061-T6 / 1045 CD / 4140 QT: MACHINE, BREAK SHARP EDGES 0.3. UNTOLERANCED DIMS +/-0.1 (TURNED), +/-0.2 (MILLED).
2. BEARING SEATS 47 K6 (6204-2RSH), SHAFT SEATS 20 h6 / 17 k6; WHEEL AND DRIVER BORES 20 H7; KEYWAYS DIN 6885 (HUB JS9, SHAFT P9).
3. GENEVA: CENTRE DISTANCE 100.00 +/-0.01 (BEARING PLATES LINE-BORED TOGETHER); CRANK RADIUS 50.00 +/-0.01; SLOT 16 +0.04/+0.08, SLOT FLANKS AND LOCKING ARCS INDUCTION HARDENED 50 HRC MIN, Ra 0.8; LOCKING DISC R36 g6, WHEEL ARCS R36.10 +0.02/0.
4. ALL DIMENSIONS MM. ROTATING PARTS: Z = AXIS, Z IN WORLD HEIGHT ABOVE THE BENCH. SOURCE: _build/design.py + build_parts.py.

DRAWN Jay Patel	10/29/2026		
CHECKED			
QA		TITLE	GenevaMechanism - manufacturing drawings
MFG			
APPROVED		SIZE D	DWG NO GM-DWG-100 REV
		SCALE 1.50 : 1	SHEET 2 OF 4


GM-202 LOWERPLATE 6061-T6, QTY 1, 4373.1 g (INVENTOR), SCALE 1:1.5, ENVELOPE 340.0 x 250.0 x 20.0 MM
340 x 250 x 20; 2 X 6204 SEATS 47 K6 x 14 FROM THE TOP ON 100.00 +/-0.01, 30 THRU;
8 X 9 THRU C'BORE 14 x 8.5 (PILLARS), 4 X 5.5 C'BORE 9.5 x 5.5 (STANDOFFS ON 56 SQ ROUND THE CRANK AXIS)

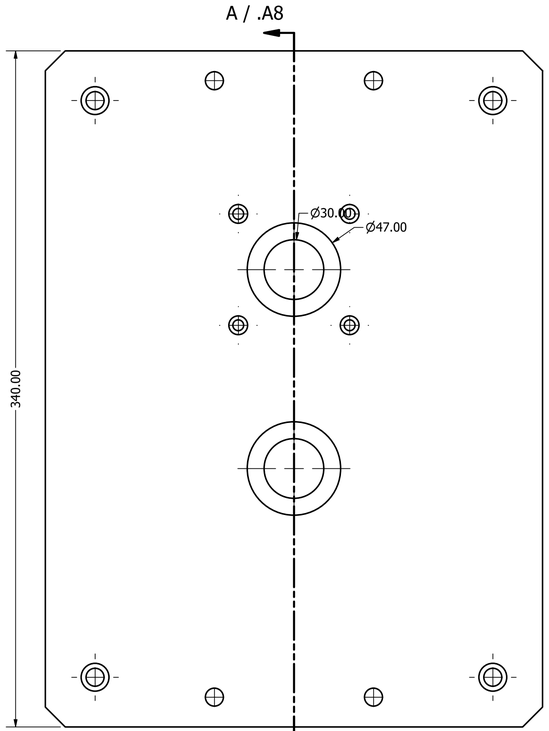


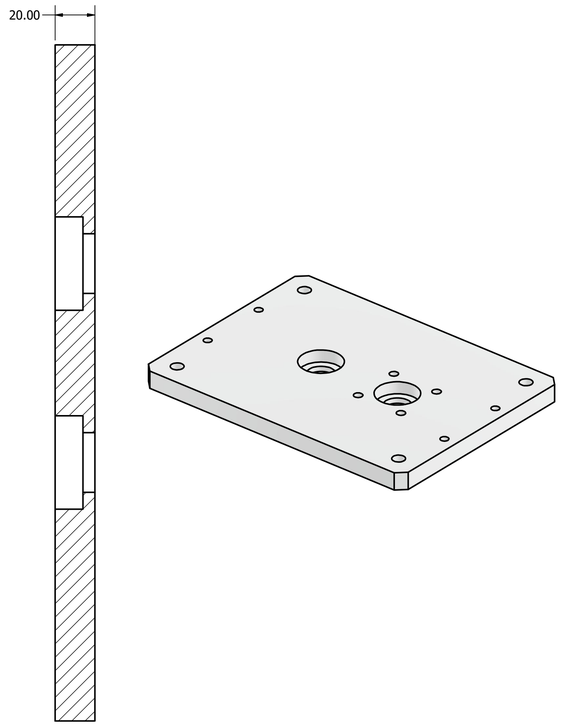

SECTION A-A
SCALE 2 / 3 / .C7

GM-203 TOPPLATE 6061-T6, QTY 1, 4403.1 g (INVENTOR), SCALE 1:1.5, ENVELOPE 340.0 x 250.0 x 20.0 MM
340 x 250 x 20; 2 X 6204 SEATS 47 K6 x 14 FROM BELOW, LINE-BORED WITH THE LOWER PLATE; 4 X M8 C'BORE

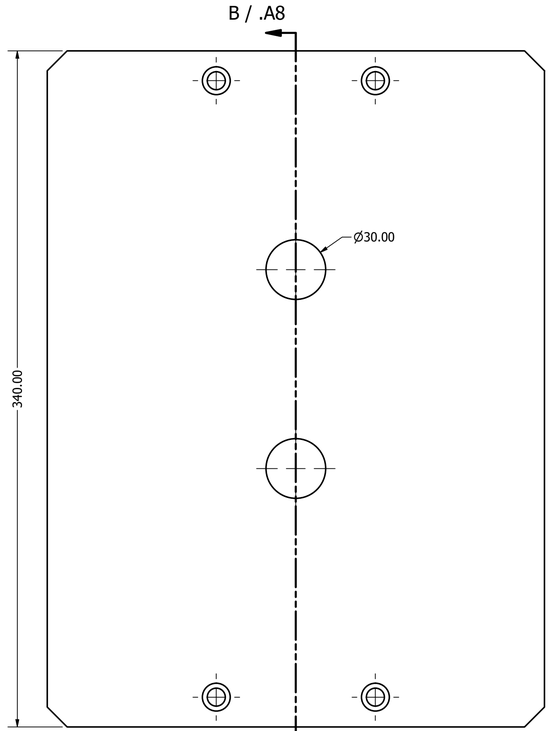

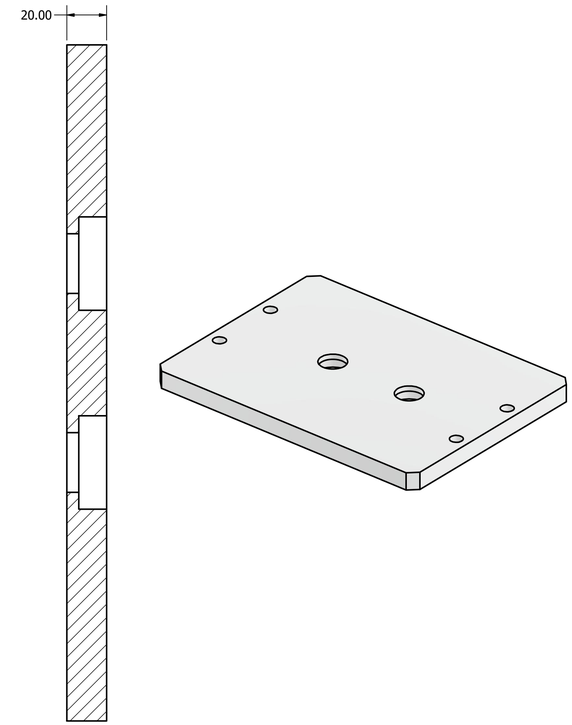


SECTION B-B
SCALE 2 / 3 / .C4

NOTES:
1. 6061-T6 / 1045 CD / 4140 QT: MACHINE, BREAK SHARP EDGES 0.3. UNTOLERANCED DIMS +/-0.1 (TURNED), +/-0.2 (MILLED).
2. BEARING SEATS 47 K6 (6204-2RSH), SHAFT SEATS 20 h6 / 17 k6; WHEEL AND DRIVER BORES 20 H7; KEYWAYS DIN 6885 (HUB JS9, SHAFT P9).
3. GENEVA: CENTRE DISTANCE 100.00 +/-0.01 (BEARING PLATES LINE-BORED TOGETHER); CRANK RADIUS 50.00 +/-0.01; SLOT 16 +0.04/+0.08, SLOT FLANKS AND LOCKING ARCS INDUCTION HARDENED 50 HRC MIN, Ra 0.8; LOCKING DISC R36 g6, WHEEL ARCS R36.10 +0.02/0.
4. ALL DIMENSIONS MM. ROTATING PARTS: Z = AXIS, Z IN WORLD HEIGHT ABOVE THE BENCH. SOURCE: _build/design.py + build_parts.py.


DRAWN	Jay Patel	10/29/2026	
CHECKED			TITLE: GenevaMechanism - manufacturing drawings
QA			
MFG			
APPROVED			
			SIZE D · DWG NO GM-DWG-100 · REV
			SCALE 2 / 3 · SHEET 3 OF 4

GM-201 BASEPLATE 6061-T6, QTY 1, 3894.5 g (INVENTOR), SCALE 1:4, ENVELOPE 360.0 x 270.0 x 15.0 MM
360 x 270 x 15; 4 X 9 C'BORE 14 x 8.5 FROM BELOW (TALL PILLARS); 4 X 11 BENCH HOLES

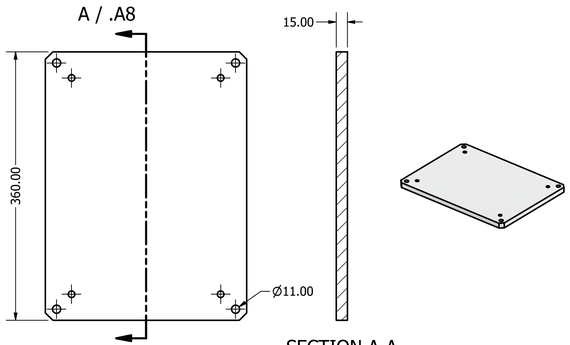


SECTION A-A
SCALE 1 / 4 / .D8

GM-206 MOTORPLATE 6061-T6, QTY 1, 160.0 g (INVENTOR), SCALE 1:1.5, ENVELOPE 84.0 x 84.0 x 10.0 MM
84 x 84 x 10; PILOT 40 H7 x 3.2, 22 THRU; 4 X M5 C'BORE TO THE PLE60 ON 52 PCD; 4 X M5 C'BORE FROM BELOW ON 56 SQ

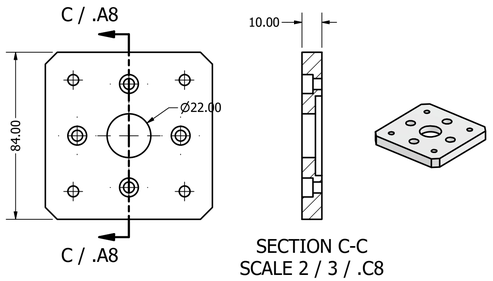


SECTION C-C
SCALE 2 / 3 / .C8

GM-205 PILLARSHORT_30X40 6061-T6, QTY 4, 72.2 g (INVENTOR), SCALE 1.5:1, ENVELOPE 40.0 x 30.0 x 30.0 MM
30 x 40, ENDS PARALLEL 0.01 (BEARING SPAN), M8 x 15 BOTH ENDS (QTY 4)

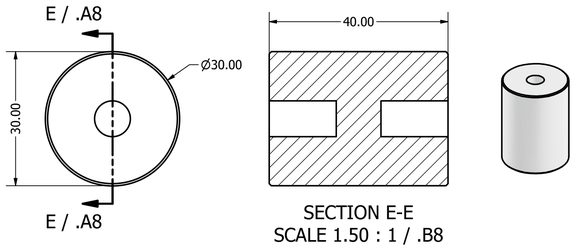


SECTION E-E
SCALE 1.50 : 1 / .B8

GM-207 INDEXTABLE_300 6061-T6, QTY 1, 2245.7 g (INVENTOR), SCALE 1:4, ENVELOPE 300.0 x 300.0 x 12.0 MM
300 x 12 FLAT 0.05; BORE 30; 6 X 6.6 C'BORE 11 x 6.5 ON 70 PCD; 6 STATIONS ON R115: 2 X M5 THRU EACH, MARK 6 x 2 AT R145

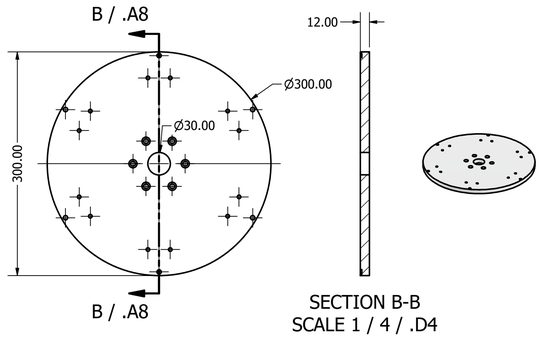


SECTION B-B
SCALE 1 / 4 / .D4

GM-204 PILLARTALL_30X195 6061-T6, QTY 4, 366.7 g (INVENTOR), SCALE 1:1, ENVELOPE 195.0 x 30.0 x 30.0 MM
30 x 195, ENDS PARALLEL 0.02, M8 x 20 BOTH ENDS (QTY 4)

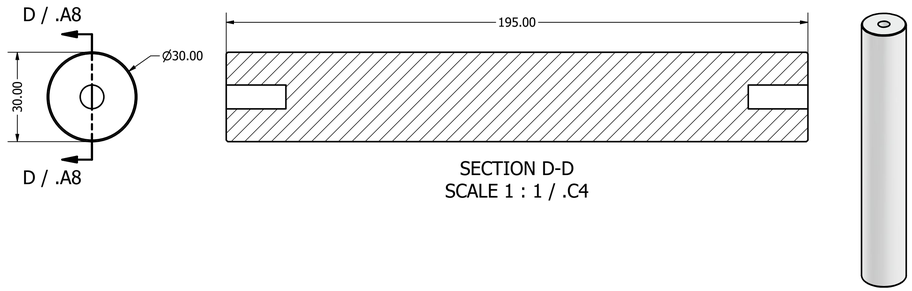

SECTION D-D
SCALE 1 : 1 / .C4

GM-209 STATIONNEST 6061-T6, QTY 6, 109.4 g (INVENTOR), SCALE 1:1, ENVELOPE 50.0 x 40.0 x 25.0 MM
50 x 40 x 25, R4 CORNERS; PART POCKET 24 H8 x 15; 2 X 5.5 C'BORE 9.5 x 15 (QTY 6, POCKET PER JOB)

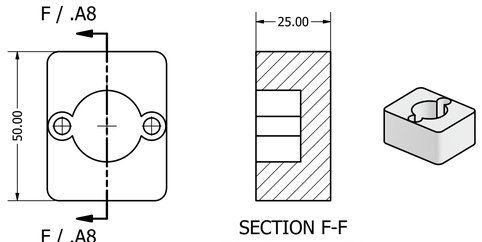

SECTION F-F
SCALE 1 : 1 / .B4

NOTES:
1. 6061-T6 / 1045 CD / 4140 QT: MACHINE, BREAK SHARP EDGES 0.3. UNTOLERANCED DIMS +/-0.1 (TURNED), +/-0.2 (MILLED).
2. BEARING SEATS 47 K6 (6204-2RSH), SHAFT SEATS 20 h6 / 17 k6; WHEEL AND DRIVER BORES 20 H7; KEYWAYS DIN 6885 (HUB JS9, SHAFT P9).
3. GENEVA: CENTRE DISTANCE 100.00 +/-0.01 (BEARING PLATES LINE-BORED TOGETHER); CRANK RADIUS 50.00 +/-0.01; SLOT 16 +0.04/+0.08, SLOT FLANKS AND LOCKING ARCS INDUCTION HARDENED 50 HRC MIN, Ra 0.8; LOCKING DISC R36 g6, WHEEL ARCS R36.10 +0.02/0.
4. ALL DIMENSIONS MM. ROTATING PARTS: Z = AXIS, Z IN WORLD HEIGHT ABOVE THE BENCH. SOURCE: _build/design.py + build_parts.py.

DRAWN Jay Patel	10/29/2026		
CHECKED		TITLE	GenevaMechanism - manufacturing drawings
QA			
MFG			
APPROVED		SIZE D	DWG NO GM-DWG-100 REV
		SCALE 1 / 4	SHEET 4 OF 4