



PH-101 PALMCHASSIS PETG PRINTED, QTY 1, 70.7 G (INVENTOR, EFFECTIVE DENSITY), SCALE 1:2, ENVELOPE 113.0 x 98.5 x 50.0 MM
4 PQ12 BAYS, LUG CLEVISES 3 H8 (DOWEL 3x16); KNUCKLE SLOTS = TONGUE + 0.6; MCP PINS 3 m6 PRESS; TENDON GUIDES 1.2;
THENAR POCKET FOR HS-82MG (SPLINE ON AXIS A: Y 48, Z -12); YOKE RECESS R16.5; HEX POCKET 19.35 AF FOR THE 1/2-20 BOLT







PH-102 PALMCOVER PETG PRINTED, QTY 1, 15.8 G (INVENTOR, EFFECTIVE DENSITY), SCALE 1:1, ENVELOPE 98.5 x 74.0 x 3.0 MM
3 MM DORSAL COVER, 6 X 2.4 CLEARANCE FOR M2 x 8 THREAD-FORMING SCREWS











NOTES:
1. PRINTED PARTS: PETG (PALM, COVER, PHALANGES, THUMB) / PLA (FOREARM BAY, FLANGE), 0.4 NOZZLE, 0.2 LAYERS, 3 WALLS, 30 % GYROID. ORIENTATION PER Tests/Printability. REAM PIN HOLES 3.0 (PRESS FOR 3 m6 DOWELS) AND BUSHING BORES 4.5 H7.
2. TENDON PowerPro 80 lb SPECTRA, KNOT + CA AT THE TIP; ELASTIC 2.0 LATEX CORD, 45 % PRE-STRETCH. NOT DRAWN.
3. UNTOLERANCED +/-0.2. ALL DIMENSIONS MM. SOURCE: _build/design.py + build_parts.py. DESIGNED, NOT BUILT.

DRAWN Jay Patel	10/29/2026	
CHECKED		TITLE: ProstheticHand - printed part drawings
QA		
MFG		
APPROVED		
		SIZE D · DWG NO PH-DWG-100 · REV
		SCALE 1 / 2 · SHEET 1 OF 3


PH-111 INDEX_P1 PETG PRINTED, QTY 1, 9.3 G (INVENTOR, EFFECTIVE DENSITY), SCALE 2:1, ENVELOPE 58.5 x 20.0 x 16.0 MM
42 PIN-TO-PIN, 20 x 16; TONGUE 13.4 WITH 4.5 BORE (2 x igus GSM-0304-03); FLEXOR WRAP GROOVE R6.5, ELASTIC GROOVE R5.0

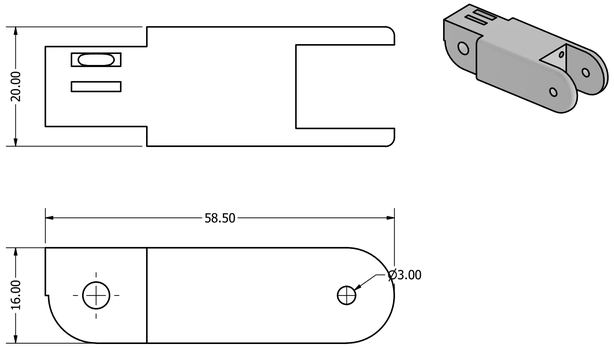


PH-112 INDEX_P2 PETG PRINTED, QTY 1, 5.1 G (INVENTOR, EFFECTIVE DENSITY), SCALE 2:1, ENVELOPE 41.5 x 20.0 x 16.0 MM
25 PIN-TO-PIN; FLEXOR WRAP GROOVE R4.4 (CONSTANT MOMENT ARM)

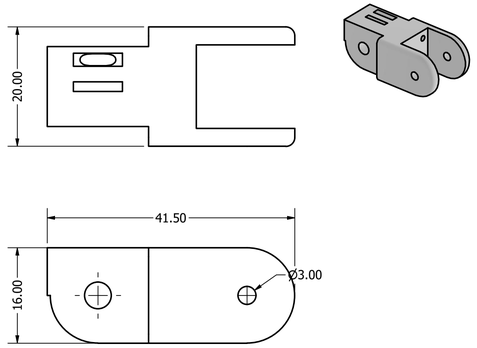

PH-113 INDEX_P3 PETG PRINTED, QTY 1, 4.9 G (INVENTOR, EFFECTIVE DENSITY), SCALE 2:1, ENVELOPE 30.5 x 20.0 x 16.0 MM
22 JOINT-TO-TIP; FLEXOR GROOVE R3.2; TENDON + ELASTIC ANCHOR HOLES 2.0

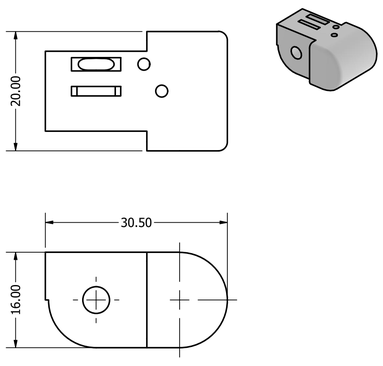


PH-151 THUMB_P1 PETG PRINTED, QTY 1, 9.4 G (INVENTOR, EFFECTIVE DENSITY), SCALE 2:1, ENVELOPE 56.5 x 20.0 x 18.0 MM
38 PIN-TO-PIN, 20 x 18; FLEXOR GROOVE R8.0 (SPOOL 7.5: RATIO 1.07)

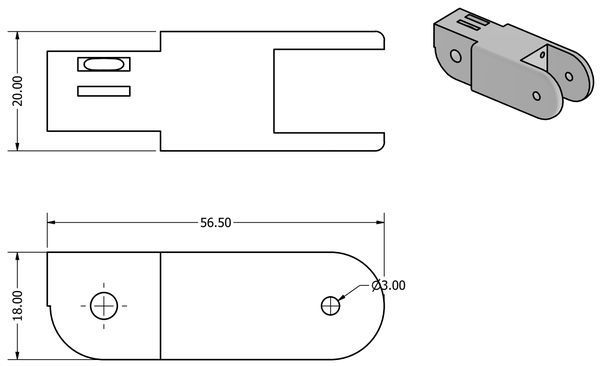


NOTES:
1. PRINTED PARTS: PETG (PALM, COVER, PHALANGES, THUMB) / PLA (FOREARM BAY, FLANGE), 0.4 NOZZLE, 0.2 LAYERS, 3 WALLS, 30 % GYROID. ORIENTATION PER Tests/Printability. REAM PIN HOLES 3.0 (PRESS FOR 3 m6 DOWELS) AND BUSHING BORES 4.5 H7.
2. TENDON PowerPro 80 lb SPECTRA, KNOT + CA AT THE TIP; ELASTIC 2.0 LATEX CORD, 45 % PRE-STRETCH. NOT DRAWN.
3. UNTOLERANCED +/-0.2. ALL DIMENSIONS MM. SOURCE: _build/design.py + build_parts.py. DESIGNED, NOT BUILT.

DRAWN Jay Patel	10/29/2026	
CHECKED		TITTLE: ProstheticHand - printed part drawings
QA		
MFG		
APPROVED		
		SIZE D / DWG NO PH-DWG-100 / REV
		SCALE 2 : 1 / SHEET 2 OF 3


PH-153 THUMBYOKE PETG PRINTED, QTY 1, 10.9 G (INVENTOR, EFFECTIVE DENSITY), SCALE 1:1, ENVELOPE 47.0 x 44.5 x 18.0 MM
TURNS ON AXIS A: HORN SEAT 6 x 3 + PIVOT BORE 4.5 x 6 (2 BUSHINGS); FLEX SERVO CAVITY OPEN ON -Y; MCP CLEVIS AT x 34, z 20.5

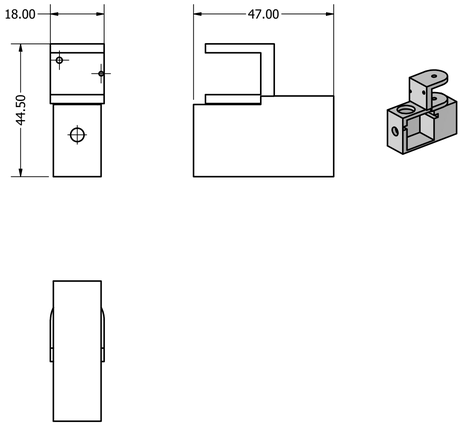

PH-201 FOREARMBAY PLA PRINTED, QTY 1, 36.2 G (INVENTOR, EFFECTIVE DENSITY), SCALE 1:1.5, ENVELOPE 80.0 x 56.0 x 56.0 MM
56 OD x 80, 2 WALL; DISTAL WALL 14 WITH 19.35 AF HEX POCKET (1/2-20 JAM NUT) + 13.2 BOLT HOLE + 6 CABLE HOLE

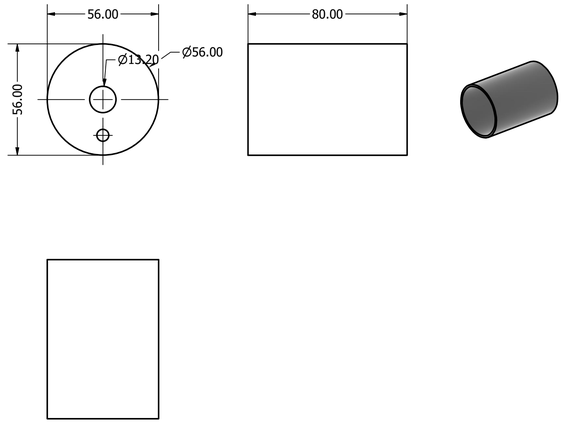

PH-202 SOCKETFLANGE PLA PRINTED, QTY 1, 8.9 G (INVENTOR, EFFECTIVE DENSITY), SCALE 1:1, ENVELOPE 70.0 x 70.0 x 9.0 MM
70 x 3 FLANGE, 4 x 4.5 ON 60 PCD (SOCKET LAMINATION PLATE), SPIGOT 51.8

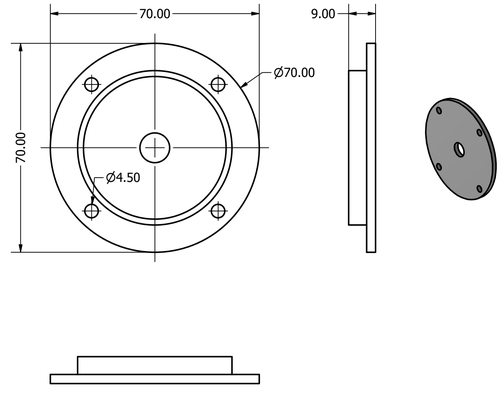

NOTES:
1. PRINTED PARTS: PETG (PALM, COVER, PHALANGES, THUMB) / PLA (FOREARM BAY, FLANGE), 0.4 NOZZLE, 0.2 LAYERS, 3 WALLS, 30 % GYROID. ORIENTATION PER Tests/Printability. REAM PIN HOLES 3.0 (PRESS FOR 3 m6 DOWELS) AND BUSHING BORES 4.5 H7.
2. TENDON PowerPro 80 lb SPECTRA, KNOT + CA AT THE TIP; ELASTIC 2.0 LATEX CORD, 45 % PRE-STRETCH. NOT DRAWN.
3. UNTOLERANCED +/-0.2. ALL DIMENSIONS MM. SOURCE: _build/design.py + build_parts.py. DESIGNED, NOT BUILT.

DRAWN Jay Patel	10/29/2026	
CHECKED		TITLE: ProstheticHand - printed part drawings
QA		
MFG		
APPROVED		
		SIZE D · DWG NO PH-DWG-100 · REV
		SCALE 1 : 1 · SHEET 3 OF 3