


SL-101 BASEFRAME S235 WELDMENT, QTY 1, 16.98 KG (INVENTOR), SCALE 1:5, ENVELOPE 1360.0 x 538.0 x 110.0 MM
2 X RHS 50x30x3 x 1360 RAILS (TOP = ROLLER TRACK, FLAT 0.5 OVER 1000); RHS FRONT MEMBER; DRIVE PLATE 10 WITH 4 X M8;
MOTOR PLATE 10: 40.5 PILOT HOLE + 4 X M6 ON 70 SQ ON THE SCREW AXIS (z 47.5); 4 X CLEVIS PL 8, HOLE 20 H8 AT x 0, z 47.5




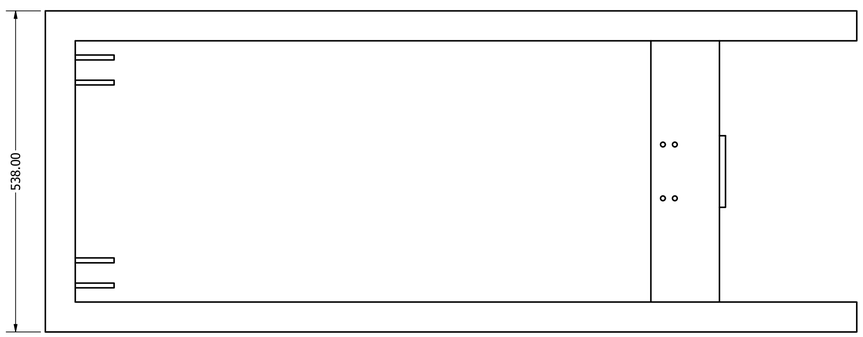


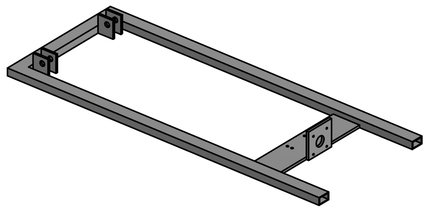

SL-102 PLATFORM S235 WELDMENT, QTY 1, 31.86 KG (INVENTOR), SCALE 1:5, ENVELOPE 1200.0 x 560.0 x 69.0 MM
DECK PL 4 x 1200 x 560; 2 X RHS 40x20x2 ROLLER RAILS (UNDERSIDE = TRACK, FLAT 0.5); EDGE TUBES + END MEMBERS 40x20x2;
4 X CLEVIS PL 8, HOLE 20 H8, 41.5 BELOW THE DECK TOP (PIVOT AXIS = PART ORIGIN)



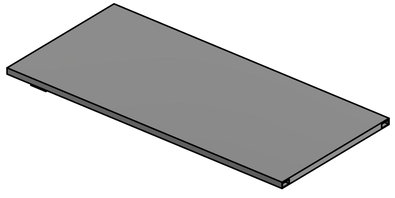






NOTES:
1. WELDMENTS: S355J2H HOLLOW SECTIONS (EN 10219) / S235JR PLATE, FILLET WELDS a3 ALL ROUND, GRIND BOSS FACES FLAT AND PARALLEL AFTER WELDING (0.1), BORE BUSHING SEATS 23 H7 / ROLLER-PIN SEATS 20 P7 AFTER WELDING IN ONE SET-UP. POWDER COAT.
2. PINS 42CrMo4 +QT, 20 f7 GROUND, ZN-NI; CLEVIS HOLES 20 H8; DIN 471 GROOVES PER DIN. UNTOLERANCED +/-0.2 (MACHINED), +/-1 (WELDED).
3. LEAD SCREW TR16x4 RH ROLLED C45: TURN JOURNAL 10 h6 x 71 CONCENTRIC TO THE THREAD (0.02), SHOULDER FACE SQUARE (0.02).
4. ALL DIMENSIONS MM. SOURCE: _build/design.py + build_parts.py.

DRAWN Jay Patel	10/29/2026	
CHECKED		
QA		
MFG		
APPROVED		
		TITLE: ScissorLift - manufacturing drawings
		SIZE D | DWG NO SL-DWG-100 | REV
		SCALE 1 / 5 | SHEET 1 OF 4


SL-103 INNERFRAME S355 WELDMENT, QTY 1, 10.69 KG (INVENTOR), SCALE 1:4, ENVELOPE 945.0 x 370.0 x 60.0 MM
ARMS RHS 60x30x3 S355 AT y +/-155..185; BOSSES 45 OD: 23 H7 AT s 0 / 450 (PCM 202330 E), 20 P7 AT s 900 (ROLLER PINS);
PIN CENTRES 450 / 900 +/-0.1; CROSS TUBES SHS 40x40x3 AT s 360 / 700

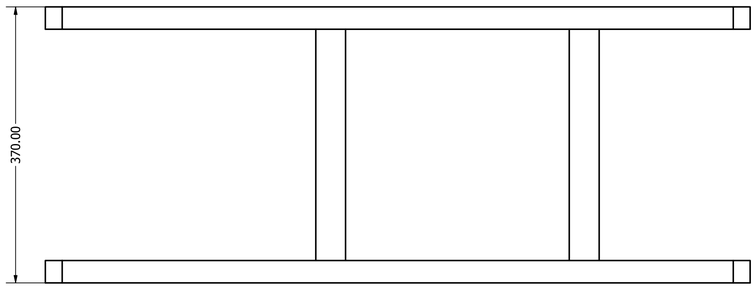


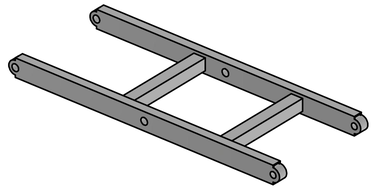


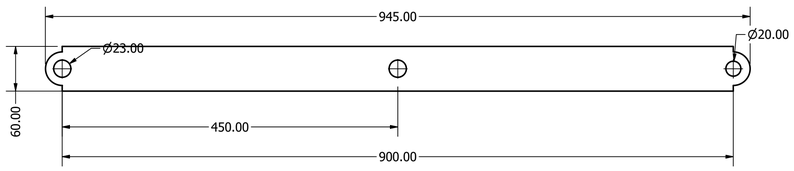

SL-104 OUTERFRAME S355 WELDMENT, QTY 1, 9.79 KG (INVENTOR), SCALE 1:4, ENVELOPE 945.0 x 434.0 x 60.0 MM
ARMS RHS 60x30x3 S355 AT y +/-187..217; BOSSES 45 OD, 23 H7 AT s 0 / 450 / 900 (PCM 202330 E);
PIN CENTRES 450 / 900 +/-0.1; CROSS TUBE SHS 40x40x3 AT s 250

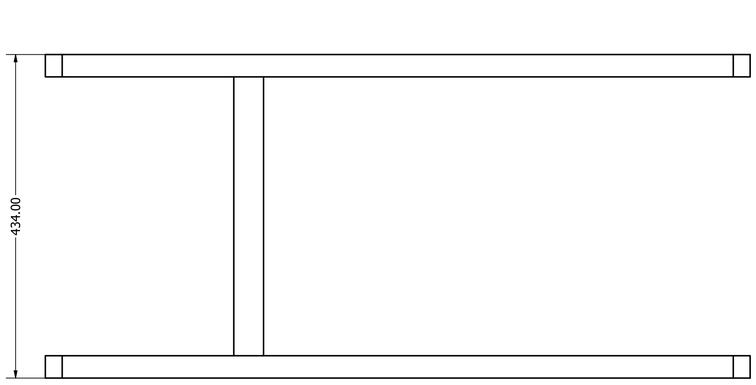

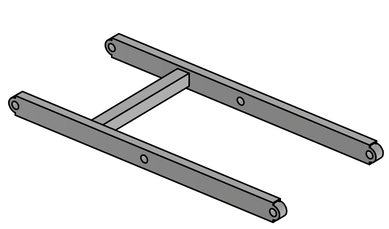


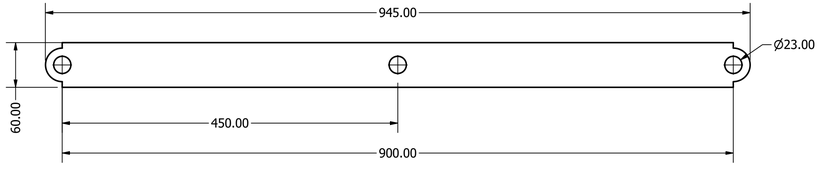



NOTES:
1. WELDMENTS: S355J2H HOLLOW SECTIONS (EN 10219) / S235JR PLATE, FILLET WELDS a3 ALL ROUND, GRIND BOSS FACES FLAT AND PARALLEL AFTER WELDING (0.1), BORE BUSHING SEATS 23 H7 / ROLLER-PIN SEATS 20 P7 AFTER WELDING IN ONE SET-UP. POWDER COAT.
2. PINS 42CrMo4 +QT, 20 f7 GROUND, ZN-NI; CLEVIS HOLES 20 H8; DIN 471 GROOVES PER DIN. UNTOLERANCED +/-0.2 (MACHINED), +/-1 (WELDED).
3. LEAD SCREW TR16x4 RH ROLLED C45: TURN JOURNAL 10 h6 x 71 CONCENTRIC TO THE THREAD (0.02), SHOULDER FACE SQUARE (0.02).
4. ALL DIMENSIONS MM. SOURCE: _build/design.py + build_parts.py.

DRAWN Jay Patel	10/29/2026	
CHECKED		TITLE: ScissorLift - manufacturing drawings
QA		
MFG		
APPROVED		
		SIZE D · DWG NO SL-DWG-100 · REV
		SCALE 1 / 4 · SHEET 2 OF 4


SL-105 NUTCARRIAGE S355 / C45 WELDMENT, QTY 1, 2.13 KG (INVENTOR), SCALE 1:2, ENVELOPE 370.0 x 60.0 x 53.0 MM
SHS 40x40x3 x 320 + 2 C45 END BLOCKS 50x50x25 (20 P7 PRESS BORES, COAXIAL 0.05); NUT PLATE 8 WITH 28.5 BORE,
4 X M6 x 11 ON 38 PCD; SCREW CLEARANCE 17 IN THE REAR WALL. PIVOT AXIS = SCREW AXIS

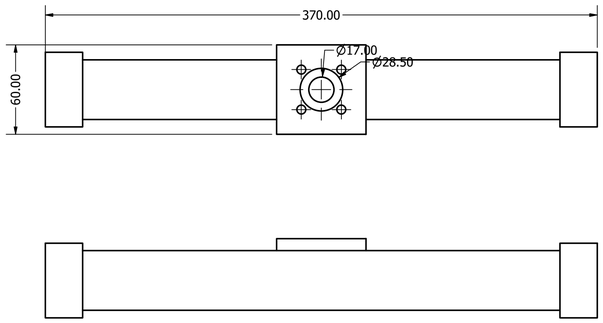








SL-203 DRIVEBLOCK C45, QTY 1, 1.77 KG (INVENTOR), SCALE 1.5:1, ENVELOPE 110.0 x 80.0 x 40.0 MM
C45 40 x 110 x 80: 51200 SEAT 26.5 x 11 (SCREW SIDE), 6200 SEAT 30 H7 x 9 (MOTOR SIDE), BORE 12; AXIS 37.5 ABOVE
THE BASE FACE; 4 X 9 THRU ON 20 x 90

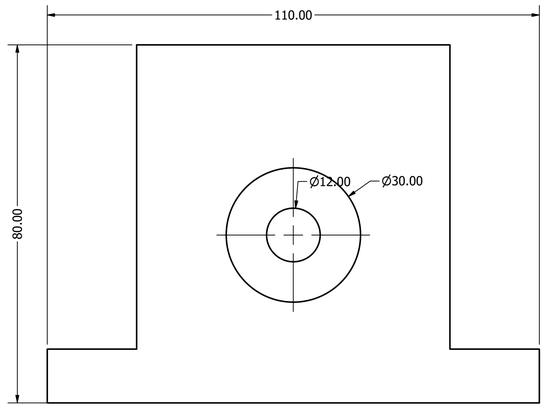

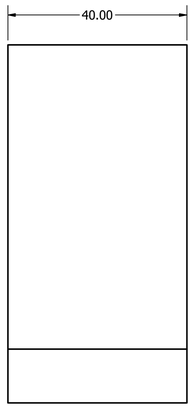




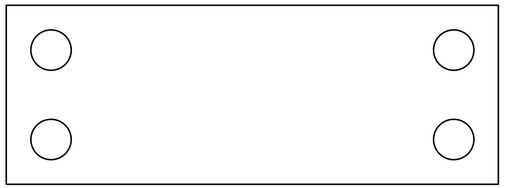


NOTES:
1. WELDMENTS: S355J2H HOLLOW SECTIONS (EN 10219) / S235JR PLATE, FILLET WELDS a3 ALL ROUND, GRIND BOSS FACES FLAT AND PARALLEL AFTER WELDING (0.1), BORE BUSHING SEATS 23 H7 / ROLLER-PIN SEATS 20 P7 AFTER WELDING IN ONE SET-UP. POWDER COAT.
2. PINS 42CrMo4 +QT, 20 f7 GROUND, ZN-NI; CLEVIS HOLES 20 H8; DIN 471 GROOVES PER DIN. UNTOLERANCED +/-0.2 (MACHINED), +/-1 (WELDED).
3. LEAD SCREW TR16x4 RH ROLLED C45: TURN JOURNAL 10 h6 x 71 CONCENTRIC TO THE THREAD (0.02), SHOULDER FACE SQUARE (0.02).
4. ALL DIMENSIONS MM. SOURCE: _build/design.py + build_parts.py.

DRAWN Jay Patel	10/29/2026	
CHECKED		TITLE ScissorLift - manufacturing drawings
QA		
MFG		
APPROVED		SIZE D / DWG NO SL-DWG-100 / REV
		SCALE 1 / 2 / SHEET 3 OF 4


SL-301 PIN20X56 42CrMo4 +QT, QTY 4, 0.14 KG (INVENTOR), SCALE 2:1, ENVELOPE 56.0 x 20.0 x 20.0 MM
20 f7 x 56, 0.5 CHAMFERS; DIN 471-20 GROOVES 19.0 x 1.3 AT 1.5 FROM EACH END (QTY 4: 2 BASE + 2 PLATFORM PIVOTS)

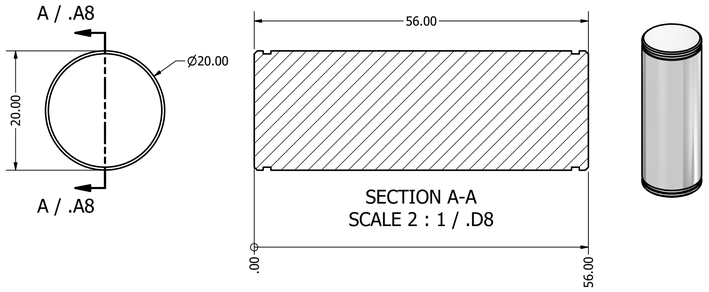


SL-302 PIN20X68 42CrMo4 +QT, QTY 2, 0.17 KG (INVENTOR), SCALE 2:1, ENVELOPE 68.0 x 20.0 x 20.0 MM
20 f7 x 68, 0.5 CHAMFERS; DIN 471-20 GROOVES 19.0 x 1.3 AT 1.5 FROM EACH END (QTY 2: CENTRE PINS)

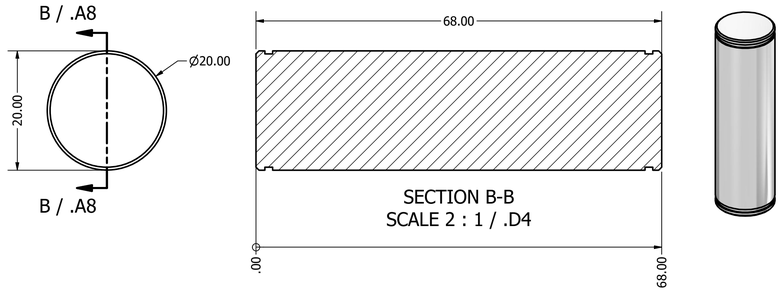

SL-303 ROLLERPIN 42CrMo4 +QT, QTY 4, 0.17 KG (INVENTOR), SCALE 2:1, ENVELOPE 75.0 x 20.0 x 20.0 MM
20 p6 x 60 (PRESS) + 15 k6 x 15 ROLLER SEAT; DIN 471-15 GROOVE 14.3 x 1.1 AT 71.2 (QTY 4)

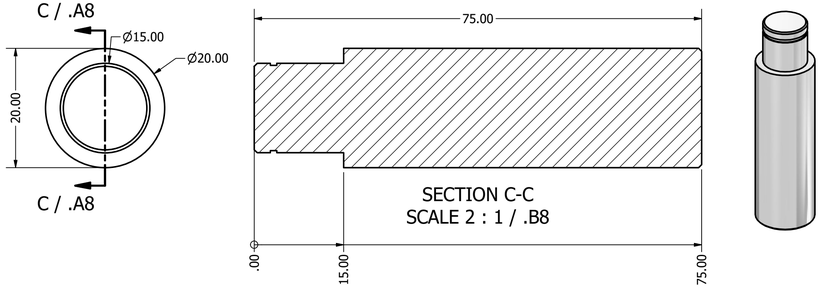

SL-201 LEADSCREW_TR16X4 C45 TR16x4 ROD, QTY 1, 0.98 KG (INVENTOR), SCALE 1:3, ENVELOPE 666.0 x 16.0 x 16.0 MM
TR16x4 RH x 595 + JOURNAL 10 h6 x 71; THREAD SHOULDER = THRUST FACE (51200); FREE END CHAMFER 1 x 45

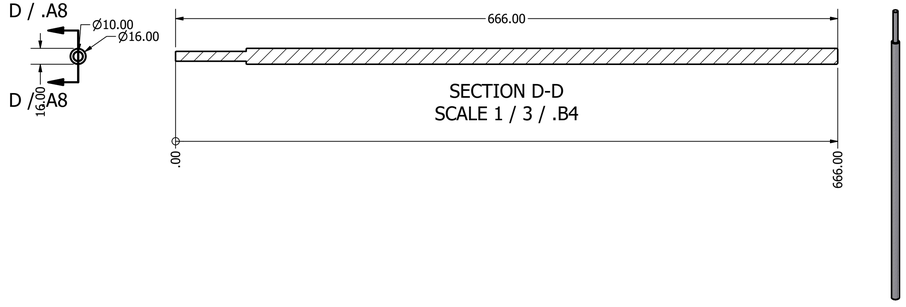

NOTES:
1. WELDMENTS: S355J2H HOLLOW SECTIONS (EN 10219) / S235JR PLATE, FILLET WELDS a3 ALL ROUND, GRIND BOSS FACES FLAT AND PARALLEL AFTER WELDING (0.1), BORE BUSHING SEATS 23 H7 / ROLLER-PIN SEATS 20 P7 AFTER WELDING IN ONE SET-UP. POWDER COAT.
2. PINS 42CrMo4 +QT, 20 f7 GROUND, ZN-NI; CLEVIS HOLES 20 H8; DIN 471 GROOVES PER DIN. UNTOLERANCED +/-0.2 (MACHINED), +/-1 (WELDED).
3. LEAD SCREW TR16x4 RH ROLLED C45: TURN JOURNAL 10 h6 x 71 CONCENTRIC TO THE THREAD (0.02), SHOULDER FACE SQUARE (0.02).
4. ALL DIMENSIONS MM. SOURCE: _build/design.py + build_parts.py.

DRAWN Jay Patel	10/29/2026	
CHECKED		
QA		TITLE: ScissorLift - manufacturing drawings
MFG		
APPROVED		SIZE D · DWG NO SL-DWG-100 · REV
		SCALE 2 : 1 · SHEET 4 OF 4