


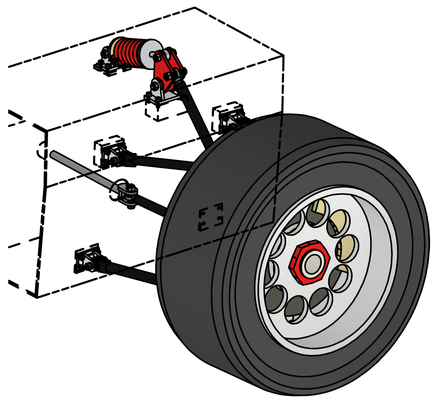


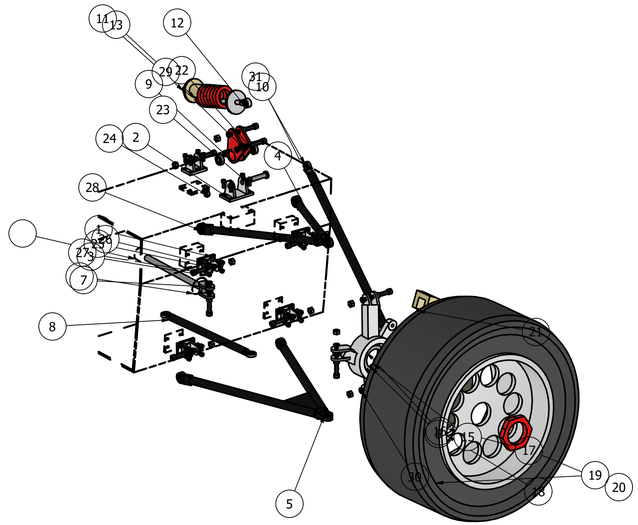

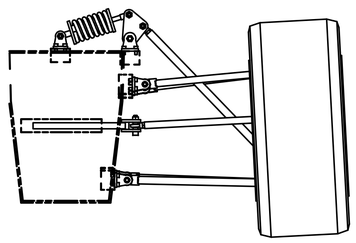

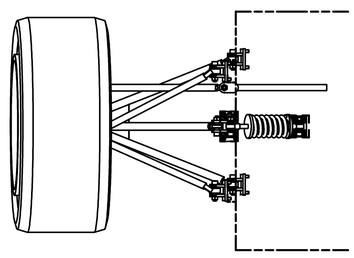

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
17	1	F1S-404	Brake disc carbon-carbon 328 x 32 (ventilation holes not modelled)
18	1	F1S-406	Wheel rim 18 in x 12 in, forged magnesium AZ80, centre lock
19	1	F1S-407	Front tyre 305/720 R18 (envelope, unloaded)
20	1	F1S-408	Centre-lock wheel nut M80x1.5, 7075-T6
21	1	F1S-405	Brake caliper, 6-piston monobloc (envelope), axial mount 2x M10
22	2	F1S-524	Deep-groove ball bearing 6202-2RS 15 x 35 x 11 (rocker pivot)
23	1	F1S-515	Rocker pivot pin d15 h6 x 62, M12 thread, 4340 steel
24	13	F1S-523	All-metal prevailing-torque locknut M12, class 10
25	8	F1S-511	Spherical plain bearing GE 12 E - inner ring (d12, dk18, B10), catalogue dimensions
26	16	F1S-519	High-misalignment cone spacer 12.2 / 14-19 x 7, 17-4PH
27	12	F1S-521	Socket head cap screw ISO 4762 M12 x 55, class 12.9, black oxide
28	8	F1S-512	Spherical plain bearing GE 12 E - outer ring (D22, C7), pressed in housing
29	4	F1S-514	Rod end M12 - ball (bore 12, sphere 22, B12)
30	8	F1S-518	High-misalignment cone spacer 12.2 / 14-19 x 6, 17-4PH
31	4	F1S-513	Rod end M12x1.25 RH body (SI 12 type, h 50, C9, D 32) with jam nut

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	5	F1S-101	Chassis clevis bracket, 7075-T6 machined, M12 double shear, 4x M8 to monocoque inserts
2	1	F1S-102	Rocker mount, 7075-T6 machined, d15 pivot pin double shear, 4x M8 to monocoque
3	24	F1S-522	Socket head cap screw ISO 4762 M8 x 20, class 12.9 (bracket to monocoque insert)
4	1	F1S-201	Upper wishbone, 4130 tube 22.2 x 1.65 TIG-welded, GE12E housings, normalised after welding
5	1	F1S-202	Lower wishbone, 4130 tube 25.4 x 1.65 TIG-welded, 3 mm gusset, GE12E housings (LBJ bolt vertical)
6	1	F1S-203	Front upright, 7075-T6 machined from billet: hub-bearing boss, UBJ/LBJ/steering/pushrod clevises, caliper lugs
7	1	F1S-104	Steering rack bar end with M12 tie-rod clevis, 17-4PH (rack teeth not modelled)
8	1	F1S-205	Tie rod (track rod), 4130 tube 22.2 x 1.65, M12 inserts, eye-to-eye 470.1 mm
9	1	F1S-206	Rocker (bell crank), twin 7075-T6 plates + hub, arms 60/80 mm, 2x 6202-2RS
10	1	F1S-204	Pushrod, 4130 tube 25.4 x 2.11, M12 RH/LH inserts, eye-to-eye 653.1 mm
11	1	F1S-301	Damper body, through-rod 4-way adjustable class (envelope), stroke 60 mm
12	1	F1S-302	Damper shaft + eye + lower spring perch (envelope)
13	1	F1S-303	Coil spring d12 wire, Dm 64, 4.9 active coils, installed 129.2 mm (see Analysis for rate)
14	1	F1S-401	Front hub / stub axle, Ti-6Al-4V, centre-lock nose, disc bell
15	1	F1S-402	Hub bearing, double-row angular contact 70 x 110 x 54 (catalogue-class envelope)
16	1	F1S-403	Hub-bearing retaining nut M66x1.5, 4340 steel

F1SUSPENSION - DOUBLE-WISHBONE PUSHROD FRONT-LEFT CORNER (FULL SIZE)
TRACK 1600 WHEELBASE 3600 TYRE 305/720 R18 STATIC CAMBER -3 DEG
KPI 8.5 DEG CASTER 6.9 DEG SCRUB 39 TRAIL 31
TRAVEL +35/-25 MM CAMBER GAIN -0.54 DEG/25 MM RC 72 MM ANTI-DIVE 28 %
INSTALLATION RATIO 0.894 SPRING 160 N/MM WHEEL RATE 133 N/MM RIDE 4.09 HZ
ASSEMBLY PARAMETERS: Heave (WHEEL TRAVEL) AND Steer (RACK) DRIVE THE MECHANISM
EXPLODED VIEW = F1Suspension_Exploded.iam. FASTENERS ISO 4762 12.9, THREADS COSMETIC.
CHASSIS SECTION AND RACK HOUSING ARE REFERENCE GEOMETRY (NOT IN PARTS LIST)

DRAWN	Jay Patel	10/28/2026	
CHECKED			
QA			TITLE: F1Suspension - general assembly
MFG			
APPROVED			
		SIZE: D	DWG NO: F1S-DWG-001 — REV:
		SCALE: 1 / 8	SHEET 1 OF 1