GK-301 REARAXLE
4140 PH 28-32 HRC, QTY 1, 6158 g (INVENTOR)
SCALE 1:5 ENVELOPE 1016.00 x 31.75 x 31.43 MM
OVERALL LENGTH 1016.0 (40.000 IN); DIA 31.75 (1.2500/1.2495 IN) GROUND; KEYWAY 6.35 X 3.18 FULL LENGTH; ENDS 1 X 45



NOTES:
1. 4130 / A36: TIG WELD (ER70S-2) TO THE CHASSIS IN THE AXLE JIG; HANGER BORES LINE-BORED AFTER WELDING, 0.2 MM.
2. 6061-T6: MACHINE FROM BILLET / PLATE, BREAK SHARP EDGES 0.5, CLEAR ANODISE. 4140 PH 28-32 HRC: GROUND 1.2500 / 1.2495 IN.
3. KEYWAYS 1/4 X 1/8 (AXLE, HUBS; INSERT SET SCREWS CLOCKED >= 90 DEG FROM THE KEYWAY) AND 3/16 X 3/32 (MOTOR SPROCKET) TO ANSI B17.1. MOTOR-FACE BOLT PATTERN TO BE CHECKED ON THE ME1114 DRAWING.
4. UNTOLERANCED DIMS +/-0.2 MM (MACHINED), +/-0.5 MM (WELDED, AFTER JIG). SPROCKET FACES COPLANAR WITHIN 0.5 MM.
5. ALL DIMENSIONS MM. KART COORDINATES (X FWD, Y LEFT, Z UP). SOURCE: _build/design.py + build_parts.py.


DRAWN	Jay Patel	10/29/2026
CHECKED		
QA		
MFG		
APPROVED		

TITLE: GoKartDrivetrain - part manufacturing drawings


SIZE	DWG NO	REV
D	GK-DWG-100	

SCALE 1 / 5 SHEET 1 OF 4

GK-103 MOTORMOUNTBRACKET
6061-T6, QTY 1, 1952 g (INVENTOR)
SCALE 1:1.5 ENVELOPE 250.00 x 233.12 x 116.09 MM
4 SLOTS 10.5 X 34.5 (TENSION TRAVEL +-12); MOTOR PILOT 64.5; 4 X 10.5 ON 165.1 PCD (ASSUMED ME1114 PATTERN)

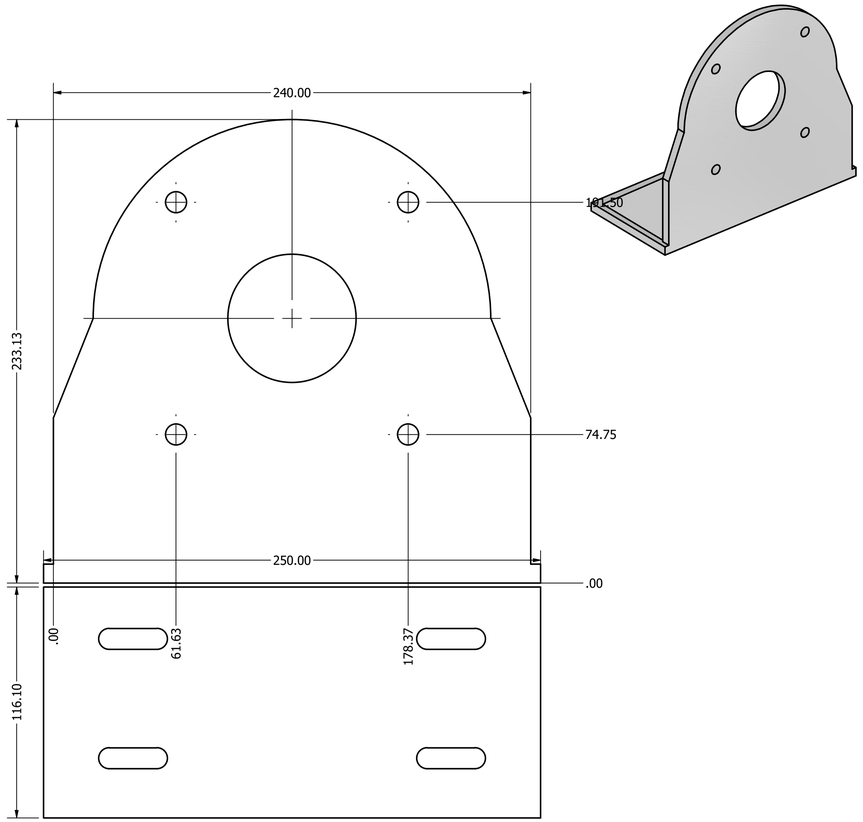

GK-102 MOTORMOUNTBASE
A36 6 MM, QTY 1, 1787 g (INVENTOR)
SCALE 1:1.5 ENVELOPE 270.00 x 142.00 x 6.00 MM
4 X 10.5 AT THE SLOT CENTRES; WELD 4 SIDES TO THE TWO 1-1/4 CROSS TUBES

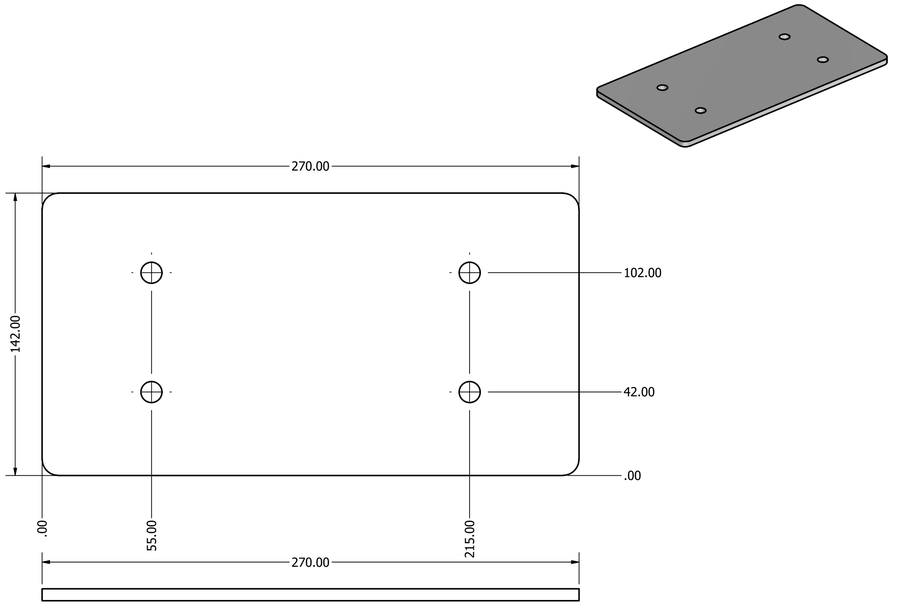

NOTES:
1. 4130 / A36: TIG WELD (ER70S-2) TO THE CHASSIS IN THE AXLE JIG; HANGER BORES LINE-BORED AFTER WELDING, 0.2 MM.
2. 6061-T6: MACHINE FROM BILLET / PLATE, BREAK SHARP EDGES 0.5, CLEAR ANODISE. 4140 PH 28-32 HRC: GROUND 1.2500 / 1.2495 IN.
3. KEYWAYS 1/4 X 1/8 (AXLE, HUBS; INSERT SET SCREWS CLOCKED >= 90 DEG FROM THE KEYWAY) AND 3/16 X 3/32 (MOTOR SPROCKET) TO ANSI B17.1. MOTOR-FACE BOLT PATTERN TO BE CHECKED ON THE ME1114 DRAWING.
4. UNTOLERANCED DIMS +/-0.2 MM (MACHINED), +/-0.5 MM (WELDED, AFTER JIG). SPROCKET FACES COPLANAR WITHIN 0.5 MM.
5. ALL DIMENSIONS MM. KART COORDINATES (X FWD, Y LEFT, Z UP). SOURCE: _build/design.py + build_parts.py.


DRAWN	Jay Patel	10/29/2026
CHECKED		
QA		
MFG		
APPROVED		

TITLE: GoKartDrivetrain - part manufacturing drawings

SIZE D | DWG NO GK-DWG-100 | REV

SCALE 2 / 3 | SHEET 2 OF 4

~~GK-101 BEARINGHANGER~~
4130 3/8 PLATE, QTY 2, 1278 g (INVENTOR)
SCALE 1:1 ENVELOPE 192.86 x 159.99 x 9.53 MM
BORE 52; 2 X 14 AT 117 CENTRES (UCFL206, 1/2-13 GR 8 + F436 WASHERS); SADDLE R15.88 ON THE 1-1/4 RAIL; 2 X 5 MM FILLET WELDS

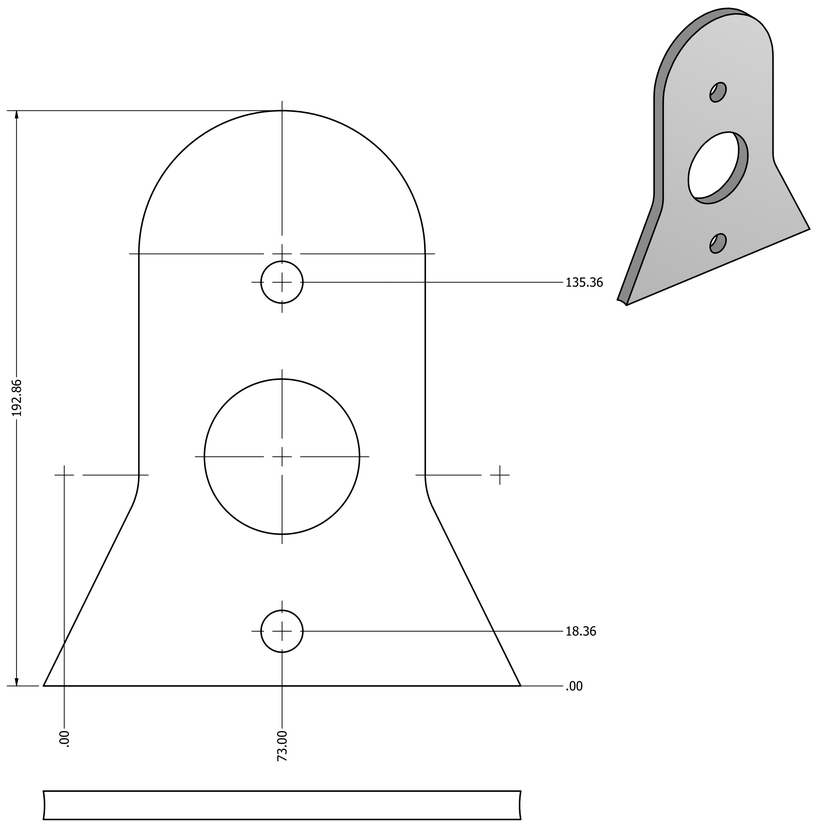

NOTES:
1. 4130 / A36: TIG WELD (ER70S-2) TO THE CHASSIS IN THE AXLE JIG; HANGER BORES LINE-BORED AFTER WELDING, 0.2 MM.
2. 6061-T6: MACHINE FROM BILLET / PLATE, BREAK SHARP EDGES 0.5, CLEAR ANODISE. 4140 PH 28-32 HRC: GROUND 1.2500 / 1.2495 IN.
3. KEYWAYS 1/4 X 1/8 (AXLE, HUBS; INSERT SET SCREWS CLOCKED >= 90 DEG FROM THE KEYWAY) AND 3/16 X 3/32 (MOTOR SPROCKET) TO ANSI B17.1. MOTOR-FACE BOLT PATTERN TO BE CHECKED ON THE ME1114 DRAWING.
4. UNTOLERANCED DIMS +/-0.2 MM (MACHINED), +/-0.5 MM (WELDED, AFTER JIG). SPROCKET FACES COPLANAR WITHIN 0.5 MM.
5. ALL DIMENSIONS MM. KART COORDINATES (X FWD, Y LEFT, Z UP). SOURCE: _build/design.py + build_parts.py.


DRAWN	Jay Patel	10/29/2026
CHECKED		
QA		
MFG		
APPROVED		


TITLE: GoKartDrivetrain - part manufacturing drawings

SIZE	DWG NO	REV
D	GK-DWG-100	


SCALE 1 : 1 SHEET 3 OF 4


GK-704 CALIPERBRACKET
A36 1/4 PLATE, QTY 1, 350 g (INVENTOR)
SCALE 1:1 ENVELOPE 105.00 x 68.00 x 6.35 MM
68 X 105 X 6.35; 2 X 8.5 FOR THE CALIPER (44 CENTRES); 2 X 5 MM FILLET WELDS ALONG THE 105 EDGES TO THE RIGHT HANGER



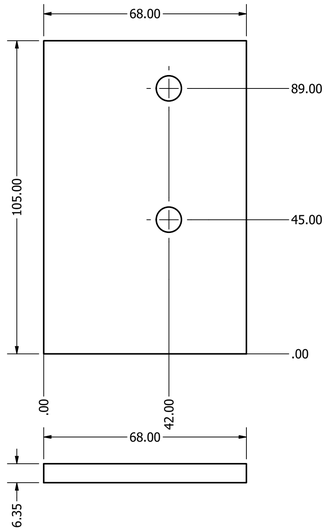

GK-705 CHAINGUARD
1.5 MM STEEL, QTY 1, 1004 g (INVENTOR)
SCALE 1:2 ENVELOPE 462.67 x 201.74 x 33.50 MM
1.5 MM STEEL SIDE PLATE + TOP COVER OVER THE TIGHT SPAN; 25 MM OFFSET FROM THE CHAIN; BOLTED TO THE MOTOR BASE



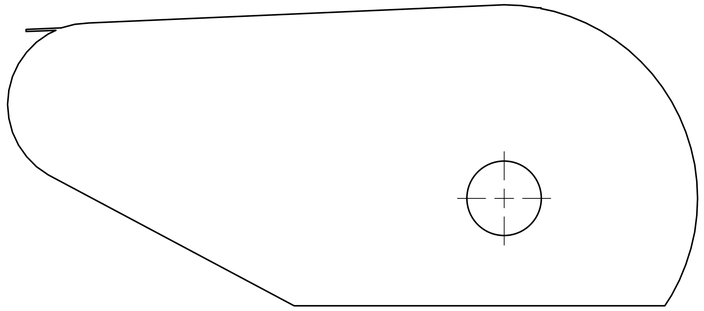



NOTES:
1. 4130 / A36: TIG WELD (ER70S-2) TO THE CHASSIS IN THE AXLE JIG; HANGER BORES LINE-BORED AFTER WELDING, 0.2 MM.
2. 6061-T6: MACHINE FROM BILLET / PLATE, BREAK SHARP EDGES 0.5, CLEAR ANODISE. 4140 PH 28-32 HRC: GROUND 1.2500 / 1.2495 IN.
3. KEYWAYS 1/4 X 1/8 (AXLE, HUBS; INSERT SET SCREWS CLOCKED >= 90 DEG FROM THE KEYWAY) AND 3/16 X 3/32 (MOTOR SPROCKET) TO ANSI B17.1. MOTOR-FACE BOLT PATTERN TO BE CHECKED ON THE ME1114 DRAWING.
4. UNTOLERANCED DIMS +/-0.2 MM (MACHINED), +/-0.5 MM (WELDED, AFTER JIG). SPROCKET FACES COPLANAR WITHIN 0.5 MM.
5. ALL DIMENSIONS MM. KART COORDINATES (X FWD, Y LEFT, Z UP). SOURCE: _build/design.py + build_parts.py.

DRAWN	Jay Patel	10/29/2026
CHECKED		
QA		
MFG		
APPROVED		

TITLE: GoKartDrivetrain - part manufacturing drawings

SIZE	DWG NO	REV
D	GK-DWG-100	

SCALE 1 : 1 SHEET 4 OF 4