

WT-201 HUB 6061-T6, QTY 1, 1212.5 g (INVENTOR), SCALE 1:2, ENVELOPE 240.0 x 240.0 x 12.0 MM
DISC 240 x 10 WITH 45 x 2 SPIGOT; BORE 17 H7 (CLAMPED ON THE SHAFT COLLAR BY THE M16x1.5 NUT); 6 X M8 THRU ON r 80 / 110 AT 0 / 120 / 240 DEG

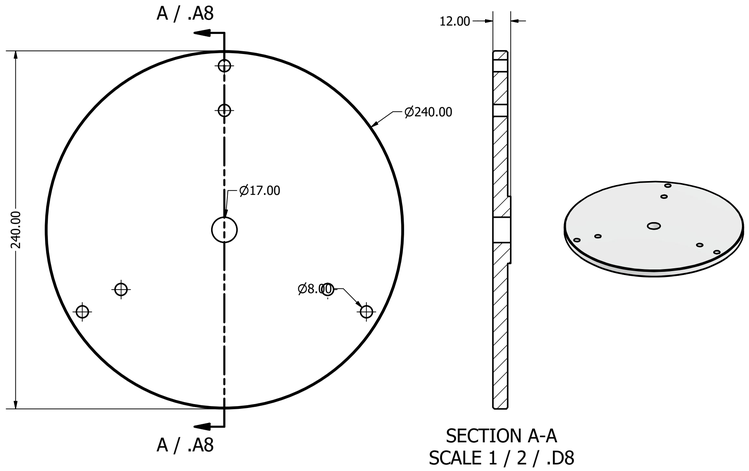


SECTION A-A
SCALE 1 / 2 / .D8

WT-202 CLAMPPLATE 6061-T6, QTY 1, 704.8 g (INVENTOR), SCALE 1:2, ENVELOPE 240.0 x 240.0 x 6.0 MM
240 x 6; CENTRE 40 (NUT ACCESS); 6 X 8.6 THRU ON r 80 / 110 AT 0 / 120 / 240 DEG (INNER 3 ALSO CLAMP THE SPINNER FLANGE)

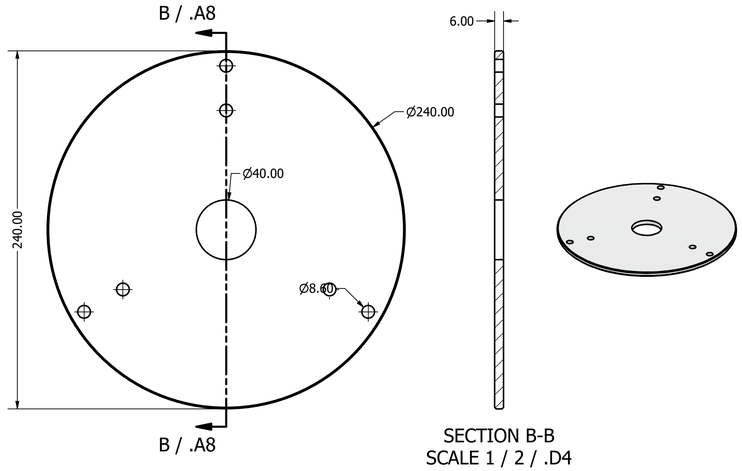


SECTION B-B
SCALE 1 / 2 / .D4

WT-402 YAWSPINDLE 1045 CD, QTY 1, 2801.3 g (INVENTOR), SCALE 1:2, ENVELOPE 306.0 x 76.0 x 76.0 MM
PLUG 52.2 x 120 IN THE 2IN PIPE, 2 X 10.5 CROSS HOLES; COLLAR 76 x 12; SPINDLE 35 h6 TO z 186, DIN 471 GROOVE 33 x 1.5 AT z 174.2; BORE 22 THRU (GENERATOR CABLE)

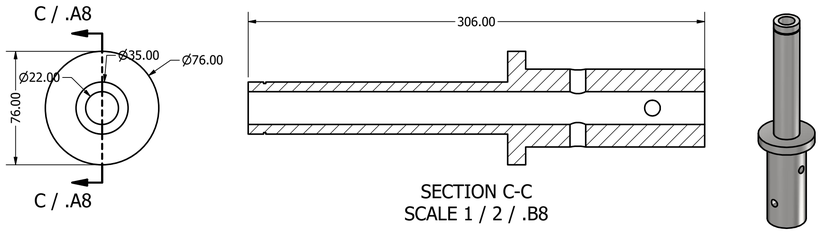

SECTION C-C
SCALE 1 / 2 / .B8

WT-406 HINGECAP S235, QTY 1, 73.7 g (INVENTOR), SCALE 2:1, ENVELOPE 50.0 x 50.0 x 5.0 MM
50 x 5, 10.5 HOLE; M10 x 20 INTO THE HINGE POST END

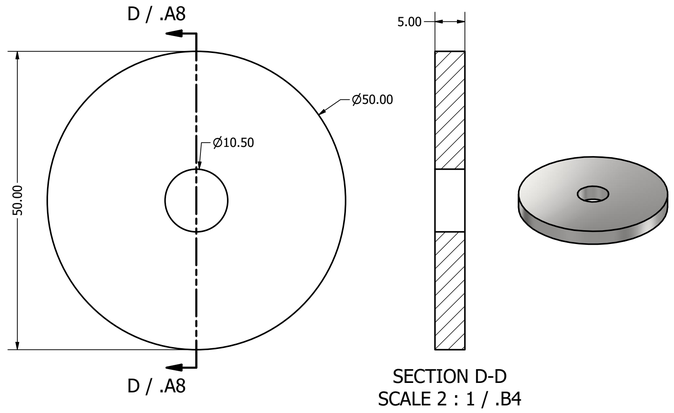

SECTION D-D
SCALE 2 : 1 / .B4

NOTES:
1. 6061-T6 / 1045 CD: MACHINE, BREAK SHARP EDGES 0.3. S235 WELDMENTS: FILLET WELDS 4 MM UNLESS NOTED, BORE AND FACE AFTER WELDING. UNTOLERANCED DIMS +/-0.1 (TURNED), +/-0.2 (MILLED), +/-1 (WELDED). GALVANISE OR ZINC-RICH PRIMER + PAINT ALL STEEL.
2. YAW TUBE SEATS 62 K6 (6007-2RS), SPINDLE 35 h6; HUB BORE 17 H7 ON THE GENERATOR SHAFT, CLAMPED BY M16x1.5 NYLOC 60 NM.
3. BLADE SEGMENTS: ASA, SPAN VERTICAL, 6 WALLS, 40 % GYROID; ROD HOLES REAMED 5.2 / 3.2, RODS BONDED WITH STRUCTURAL EPOXY.
4. ALL DIMENSIONS MM. SOURCE: _build/design.py + build_parts.py (ROTOR PARTS: Z = ROTOR AXIS; BLADE: Z = SPAN).


DRAWN	Jay Patel	10/29/2026
CHECKED		
QA		
MFG		
APPROVED		


TITLE: WindTurbine - manufacturing drawings

SIZE	DWG NO	REV
D	WT-DWG-100	

SCALE 1 / 2 SHEET 1 OF 5

WT-401 NACELLEFRAME S235 WELDMENT, QTY 1, 6138.2 g (INVENTOR), SCALE 1:1, ENVELOPE 255.5 x 185.2 x 163.5 MM
YAW TUBE 76 x 162, SEATS 62 K6 x 13.5 BOTH ENDS, BORE 56; GENERATOR PLATE 6 MM 170 x 163.5 WITH 40 HOLE AND 4 X 6.6 C'BORE 11 x 4 ON
PCD 110 (ROTOR AXIS 35 OFF THE YAW AXIS, 94 ABOVE THE MAST TOP); ARM PLATE 6; 2 GUSSETS; HINGE POST 1IN SCH 80 TILTED 20 DEG, COLLAR 50 x 8

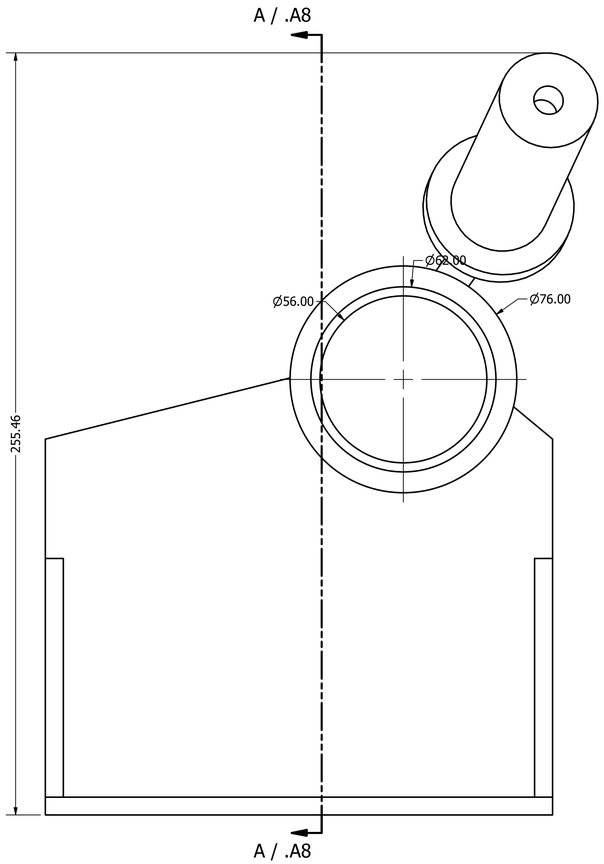

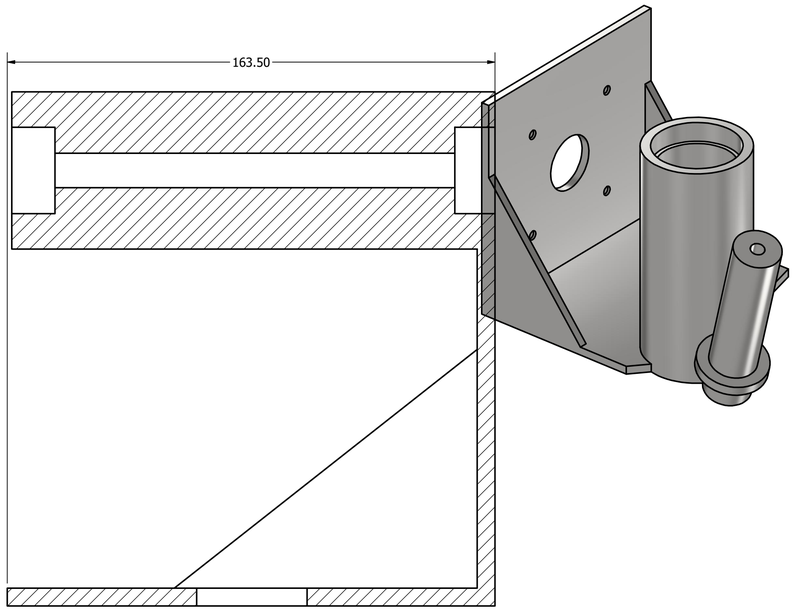


SECTION A-A
SCALE 1 : 1 / .C7

NOTES:
1. 6061-T6 / 1045 CD: MACHINE, BREAK SHARP EDGES 0.3. S235 WELDMENTS: FILLET WELDS 4 MM UNLESS NOTED, BORE AND FACE AFTER WELDING.
UNTOLERANCED DIMS +/-0.1 (TURNED), +/-0.2 (MILLED), +/-1 (WELDED). GALVANISE OR ZINC-RICH PRIMER + PAINT ALL STEEL.
2. YAW TUBE SEATS 62 K6 (6007-2RS), SPINDLE 35 h6; HUB BORE 17 H7 ON THE GENERATOR SHAFT, CLAMPED BY M16x1.5 NYLOC 60 NM.
3. BLADE SEGMENTS: ASA, SPAN VERTICAL, 6 WALLS, 40 % GYROID; ROD HOLES REAMED 5.2 / 3.2, RODS BONDED WITH STRUCTURAL EPOXY.
4. ALL DIMENSIONS MM. SOURCE: _build/design.py + build_parts.py (ROTOR PARTS: Z = ROTOR AXIS; BLADE: Z = SPAN).


DRAWN Jay Patel	10/29/2026	
CHECKED		TITLE: WindTurbine - manufacturing drawings
QA		
MFG		
APPROVED		SIZE D · DWG NO WT-DWG-100 · REV
		SCALE 1 : 1 · SHEET 2 OF 5

WT-404 TAILBOOM S235 WELDMENT, QTY 1, 1488.6 g (INVENTOR), SCALE 1:2.5, ENVELOPE 767.2 x 305.6 x 42.2 MM
SLEEVE 1-1/4IN SCH 40 x 100 (35.0 BORE ON THE 33.4 POST); BOOM 1IN SQ x 2 x 780 WELDED AT 110 DEG TO THE SLEEVE AXIS; 3 X 6.4 FOR THE VANE

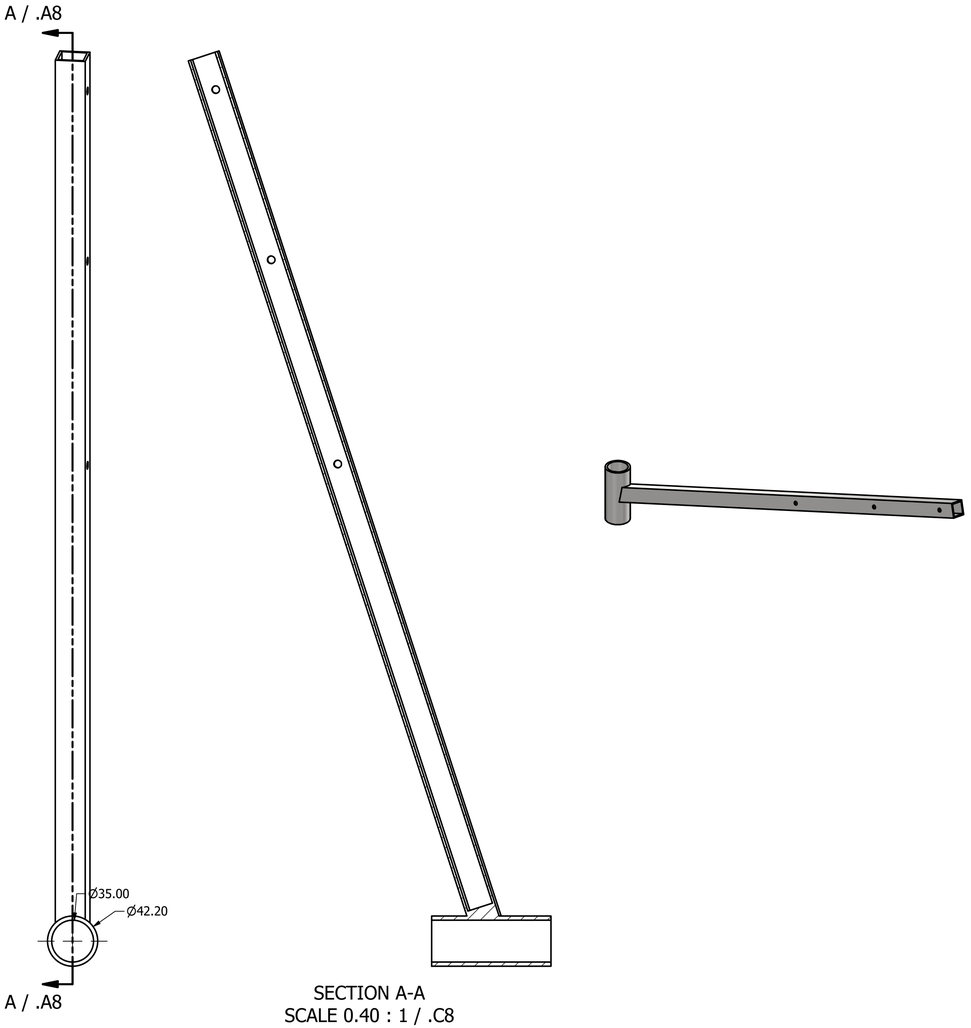

SECTION A-A
SCALE 0.40 : 1 / .C8

WT-405 TAILVANE 5052-H32 1.6, QTY 1, 492.7 g (INVENTOR), SCALE 1:2.5, ENVELOPE 514.0 x 377.7 x 47.2 MM
5052-H32 1.6, TRAPEZOID 460 LONG, 200 -> 300 HIGH (0.115 M2); 3 X 6.4 MATCH-DRILLED WITH THE BOOM

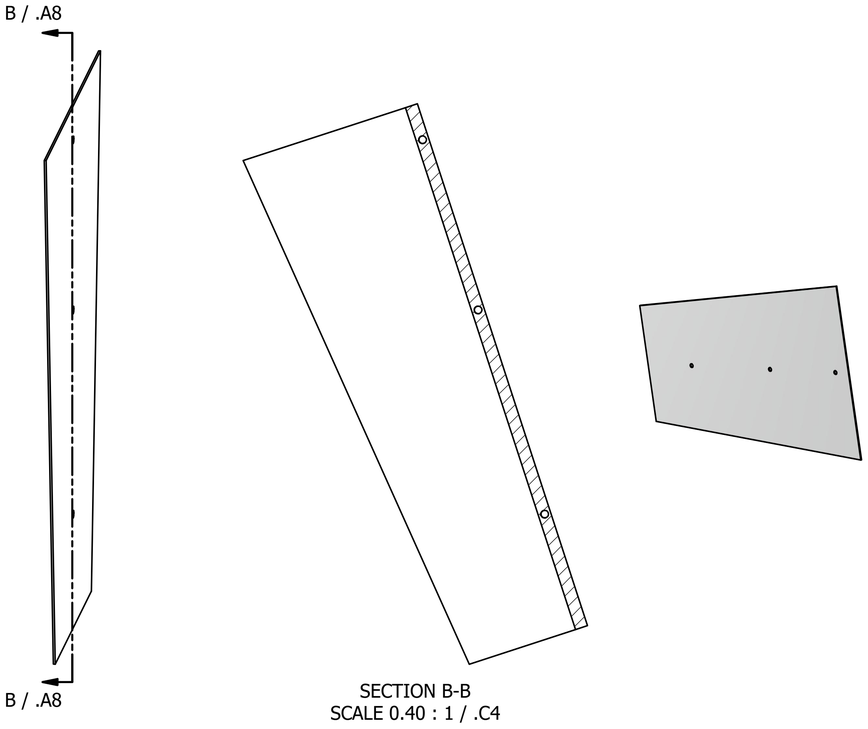

SECTION B-B
SCALE 0.40 : 1 / .C4


NOTES:
1. 6061-T6 / 1045 CD: MACHINE, BREAK SHARP EDGES 0.3. S235 WELDMENTS: FILLET WELDS 4 MM UNLESS NOTED, BORE AND FACE AFTER WELDING.
2. UNTOLERANCED DIMS +/-0.1 (TURNED), +/-0.2 (MILLED), +/-1 (WELDED). GALVANISE OR ZINC-RICH PRIMER + PAINT ALL STEEL.
3. YAW TUBE SEATS 62 K6 (6007-2RS), SPINDLE 35 h6; HUB BORE 17 H7 ON THE GENERATOR SHAFT, CLAMPED BY M16x1.5 NYLOC 60 NM.
4. BLADE SEGMENTS: ASA, SPAN VERTICAL, 6 WALLS, 40 % GYROID; ROD HOLES REAMED 5.2 / 3.2, RODS BONDED WITH STRUCTURAL EPOXY.
5. ALL DIMENSIONS MM. SOURCE: _build/design.py + build_parts.py (ROTOR PARTS: Z = ROTOR AXIS; BLADE: Z = SPAN).


DRAWN	Jay Patel	10/29/2026
CHECKED		
QA		
MFG		
APPROVED		

TITLE: WindTurbine - manufacturing drawings


SIZE: D | DWG NO: WT-DWG-100 | REV:
SCALE: 0.40 : 1 | SHEET 3 OF 5

WT-504 GUYCOLLAR S235 WELDMENT, GALV., QTY 1, 1580.1 g (INVENTOR), SCALE 1:1, ENVELOPE 147.1 x 147.1 x 40.0 MM
RING 90 / 61 x 40; 4 LUGS 8 THICK AT 45 / 135 / 225 / 315 DEG WITH 13 HOLES ON r 75; 10.5 CROSS HOLE

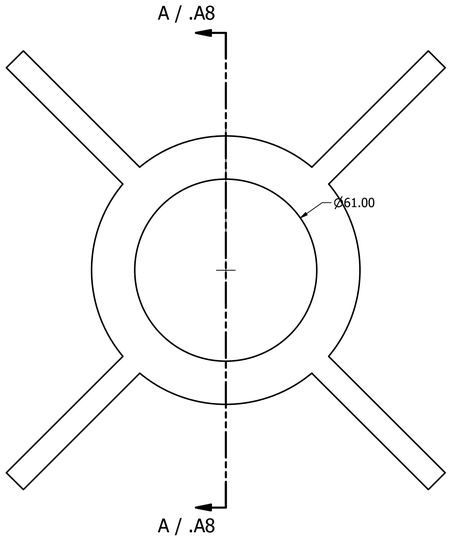





SECTION A-A
SCALE 1 : 1 / .C8




WT-505 BASEHINGE S235 WELDMENT, GALV., QTY 1, 9298.6 g (INVENTOR), SCALE 1:2, ENVELOPE 300.0 x 300.0 x 95.0 MM
PLATE 300 x 300 x 12, 4 X 14 ON 230 SQ (M12 ANCHORS); 2 LUGS 10 THICK, 95 HIGH, 62.3 APART, 16.5 PIN HOLE AT z 60

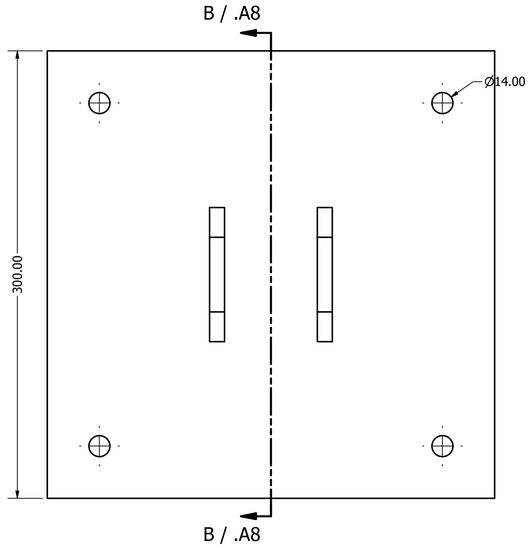

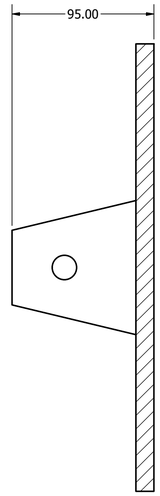


SECTION B-B
SCALE 1 / 2 / .C4



NOTES:
1. 6061-T6 / 1045 CD: MACHINE, BREAK SHARP EDGES 0.3. S235 WELDMENTS: FILLET WELDS 4 MM UNLESS NOTED, BORE AND FACE AFTER WELDING. UNTOLERANCED DIMS +/-0.1 (TURNED), +/-0.2 (MILLED), +/-1 (WELDED). GALVANISE OR ZINC-RICH PRIMER + PAINT ALL STEEL.
2. YAW TUBE SEATS 62 K6 (6007-2RS), SPINDLE 35 h6; HUB BORE 17 H7 ON THE GENERATOR SHAFT, CLAMPED BY M16x1.5 NYLOC 60 NM.
3. BLADE SEGMENTS: ASA, SPAN VERTICAL, 6 WALLS, 40 % GYROID; ROD HOLES REAMED 5.2 / 3.2, RODS BONDED WITH STRUCTURAL EPOXY.
4. ALL DIMENSIONS MM. SOURCE: _build/design.py + build_parts.py (ROTOR PARTS: Z = ROTOR AXIS; BLADE: Z = SPAN).


DRAWN Jay Patel	10/29/2026	
CHECKED		TITLE
QA		WindTurbine - manufacturing drawings
MFG		
APPROVED		SIZE D / DWG NO WT-DWG-100 / REV
		SCALE 1 : 1 / SHEET 4 OF 5

WT-101 BLADEROOT ASA PRINTED, QTY 3, 193.5 g (INVENTOR), SCALE 1:1.5, ENVELOPE 208.0 x 124.7 x 50.0 MM
r 62-270: ROOT BLOCK 44 x 20 TO r 125, 2 X 8.6 AT r 80 / 110; LOFT TO SG6040 CHORD 125 TWIST 20.9 AT r 175; 2 X 5.2 ROD HOLES

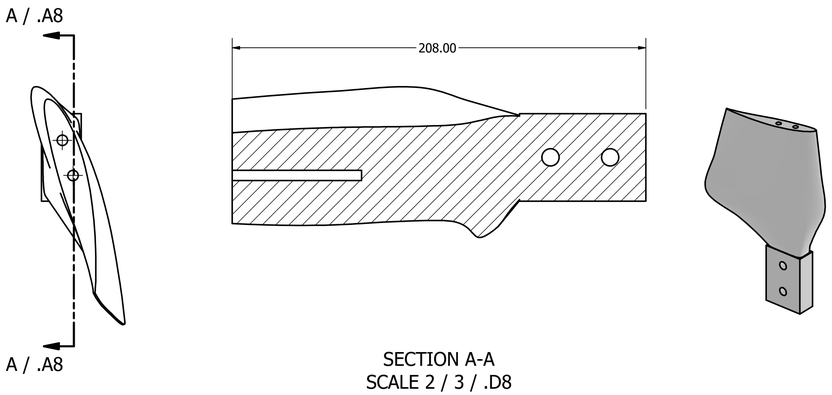


SECTION A-A
SCALE 2 / 3 / .D8

WT-102 BLADEMID ASA PRINTED, QTY 3, 79.9 g (INVENTOR), SCALE 1:1, ENVELOPE 190.0 x 97.8 x 26.0 MM
r 270-460: SG6040 -> SG6043, CHORD 100.5 -> 64.8, TWIST 13.6 -> 7.0 DEG; 2 X 5.2 + 2 X 3.2 ROD HOLES

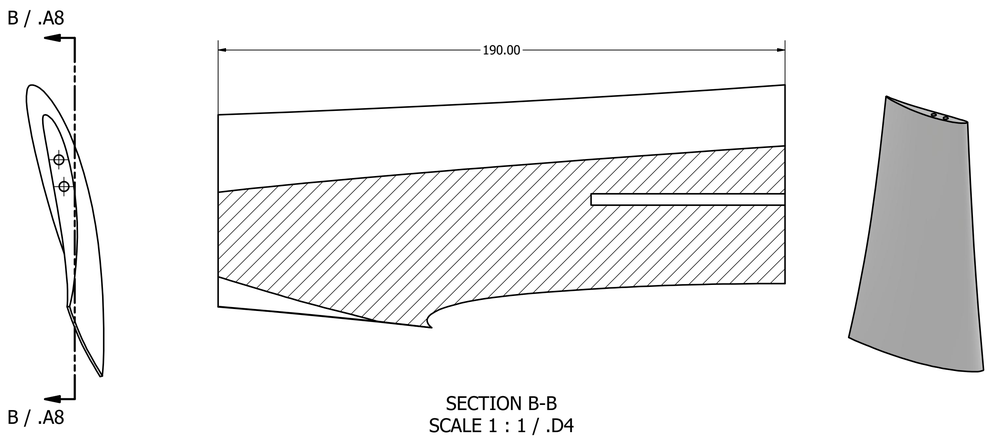


SECTION B-B
SCALE 1 : 1 / .D4

WT-103 BLADETIP ASA PRINTED, QTY 3, 34.6 g (INVENTOR), SCALE 1:1, ENVELOPE 190.0 x 64.4 x 11.8 MM
r 460-650: SG6043, CHORD 64.8 -> 47.1, TWIST 7.0 -> 4.0 DEG, TE 0.8; 2 X 3.2 ROD HOLES

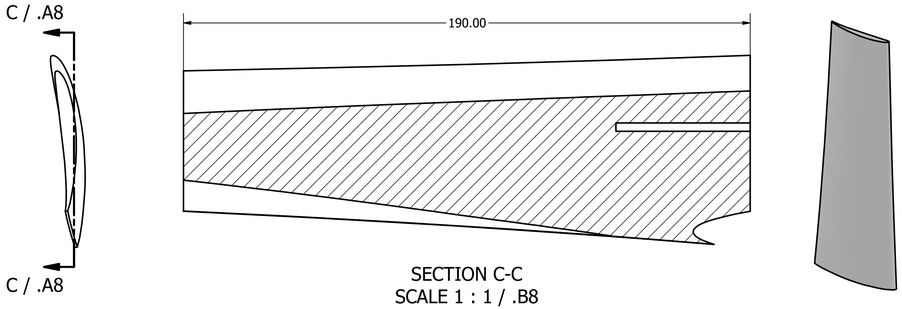

SECTION C-C
SCALE 1 : 1 / .B8

WT-203 SPINNER PETG PRINTED, QTY 1, 91.9 g (INVENTOR), SCALE 1:1.5, ENVELOPE 190.0 x 190.0 x 124.0 MM
190 x 124 OGIVE, 2.4 WALL, 4 MM FLANGE WITH 3 X 8.6 ON r 80

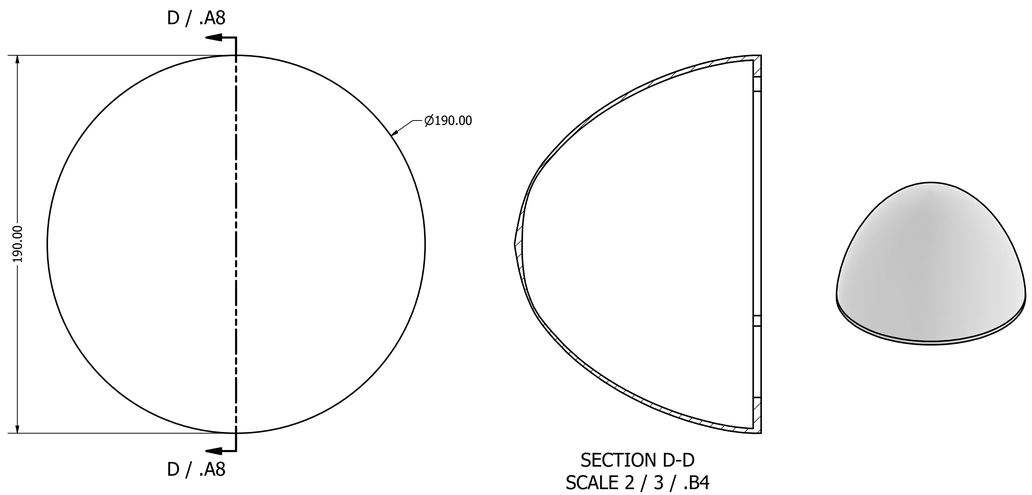

SECTION D-D
SCALE 2 / 3 / .B4

NOTES:
1. 6061-T6 / 1045 CD: MACHINE, BREAK SHARP EDGES 0.3. S235 WELDMENTS: FILLET WELDS 4 MM UNLESS NOTED, BORE AND FACE AFTER WELDING. UNTOLERANCED DIMS +/-0.1 (TURNED), +/-0.2 (MILLED), +/-1 (WELDED). GALVANISE OR ZINC-RICH PRIMER + PAINT ALL STEEL.
2. YAW TUBE SEATS 62 K6 (6007-2RS), SPINDLE 35 h6; HUB BORE 17 H7 ON THE GENERATOR SHAFT, CLAMPED BY M16x1.5 NYLOC 60 NM.
3. BLADE SEGMENTS: ASA, SPAN VERTICAL, 6 WALLS, 40 % GYROID; ROD HOLES REAMED 5.2 / 3.2, RODS BONDED WITH STRUCTURAL EPOXY.
4. ALL DIMENSIONS MM. SOURCE: _build/design.py + build_parts.py (ROTOR PARTS: Z = ROTOR AXIS; BLADE: Z = SPAN).

DRAWN Jay Patel	10/29/2026	
CHECKED		
QA		TITLE: WindTurbine - manufacturing drawings
MFG		
APPROVED		
		SIZE D · DWG NO WT-DWG-100 · REV
		SCALE 2 / 3 · SHEET 5 OF 5