

Shyam Polymers

Cellulose acetate granules for eyewear

Plant-based acetate compounds for injection-moulded spectacle and sunglass frames, in solid, crystal, tortoise and pearl colours. Nylon 6 and PBT granules for engineering parts.



50+

years in plastics

100 t

acetate capacity a year

250+

people, four sites

120+

coded colours


Granules that mould into frames people want to wear

Our cellulose acetate compounds are made for injection moulding of spectacle fronts, temples and sunglass frames. Every batch is colour-checked against its master, dried, bagged and labelled with a traceable batch number. We hold stock in Gujarat, match colours to your sample and send trial quantities free.

- Phthalate-free plasticisers
- Consistent melt flow from batch to batch
- Polishes to a deep gloss after moulding
- 25 kg moisture-barrier bags


Solids

SP-A100 series

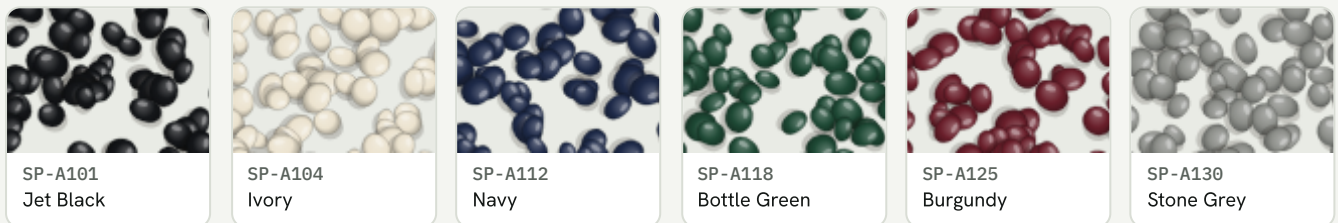

Crystal

SP-A200 series

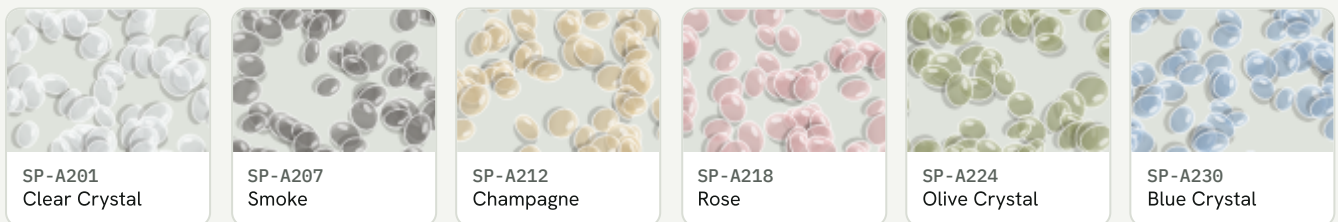

Tortoise

SP-A300 series



Pearl

SP-A400 series



Printed and on-screen colours are a guide. Ask for physical chips and moulded plaques. Custom colours matched to your sample in 7 to 10 working days.

Typical properties and moulding guide

Acetate granules, typical values

PROPERTY	METHOD	VALUE
Density	ISO 1183	1.27 to 1.30 g/cm ³
Melt flow rate	ISO 1133	8 to 18 g/10 min
Tensile strength	ISO 527	35 to 50 MPa
Hardness	Rockwell R	90 to 110
Vicat softening point	ISO 306	85 to 105 °C
Moisture as supplied	Karl Fischer	≤ 0.2 %

Values vary by grade. A full technical data sheet comes with every grade.

Moulding guide

Drying	70 to 80 °C for 2 to 4 hours
Melt temperature	180 to 220 °C
Mould temperature	40 to 70 °C
Injection speed	Medium to fast, to avoid flow lines
Regrind	Up to 20 % clean regrind of the same colour
Packing	25 kg moisture-barrier bags, 1 t per pallet

Our technical team can help set up drying and moulding at your plant.

ENGINEERING POLYMERS

Nylon 6 and PBT granules

Nylon 6

50 t a year

Natural, unfilled	SP-N600
Black, unfilled	SP-N601
15 % glass-filled	SP-N615G
30 % glass-filled	SP-N630G
Impact-modified	SP-N6IM

Switch housings, cable ties, gears, bushes, automotive clips.

PBT

30 t a year

Natural, unfilled	SP-B100
30 % glass-filled	SP-B130G
Flame-retardant	SP-B1FR

Connectors, relay and coil parts, lamp holders, automotive sensors.

A Vadodara family business, now in its second generation

Our founder came to Vadodara as a young man and started in the plastics trade. The business grew into compounding, and then into acetate for the eyewear industry. Today it is run by his son, with the rule the founder started with: every bag that leaves the plant should match the last one.

Head office and colour lab

Ajwa Road, Vadodara

Waghodia plant

Nylon 6 and PBT

Halol plant

Acetate compounding

Savli unit

Regrind and warehousing

1970s

Founder settles in Vadodara and starts trading plastics.

1980s

First compounding line. Acetate for combs and hair accessories.

1990s

Eyewear-grade acetate. Frame makers become our main customers.

2003

Shyam Polymers registered. Nylon 6 and PBT added.

2010s

Halol plant opens. Acetate capacity reaches 100 tonnes a year.

Today

Colour lab, phthalate-free range, second generation at the helm.

QUALITY AND SUSTAINABILITY

ISO 9001

Quality management, 2015 standard

REACH

Compliant, SVHC-screened raw materials

RoHS

Compliant for restricted substances

Phthalate-free

Test report for every acetate grade

Made from plants

Cellulose acetate comes from wood pulp and cotton, not crude oil. Our compounds are tested for biodegradation under ISO 14855 composting conditions.

Scrap taken back

Frame makers can return clean sprues and runners. We regrind them and put them back into use instead of sending them to landfill.

Shyam Polymers

Free samples, colour matching and technical data sheets on request. We usually reply within one working day.

EMAIL

sales@shyampolymers.net

PHONE

+91 265 XXX XXXX

HEAD OFFICE

Ajwa Road, Vadodara, Gujarat 390019

WEB

shyampolymers.net