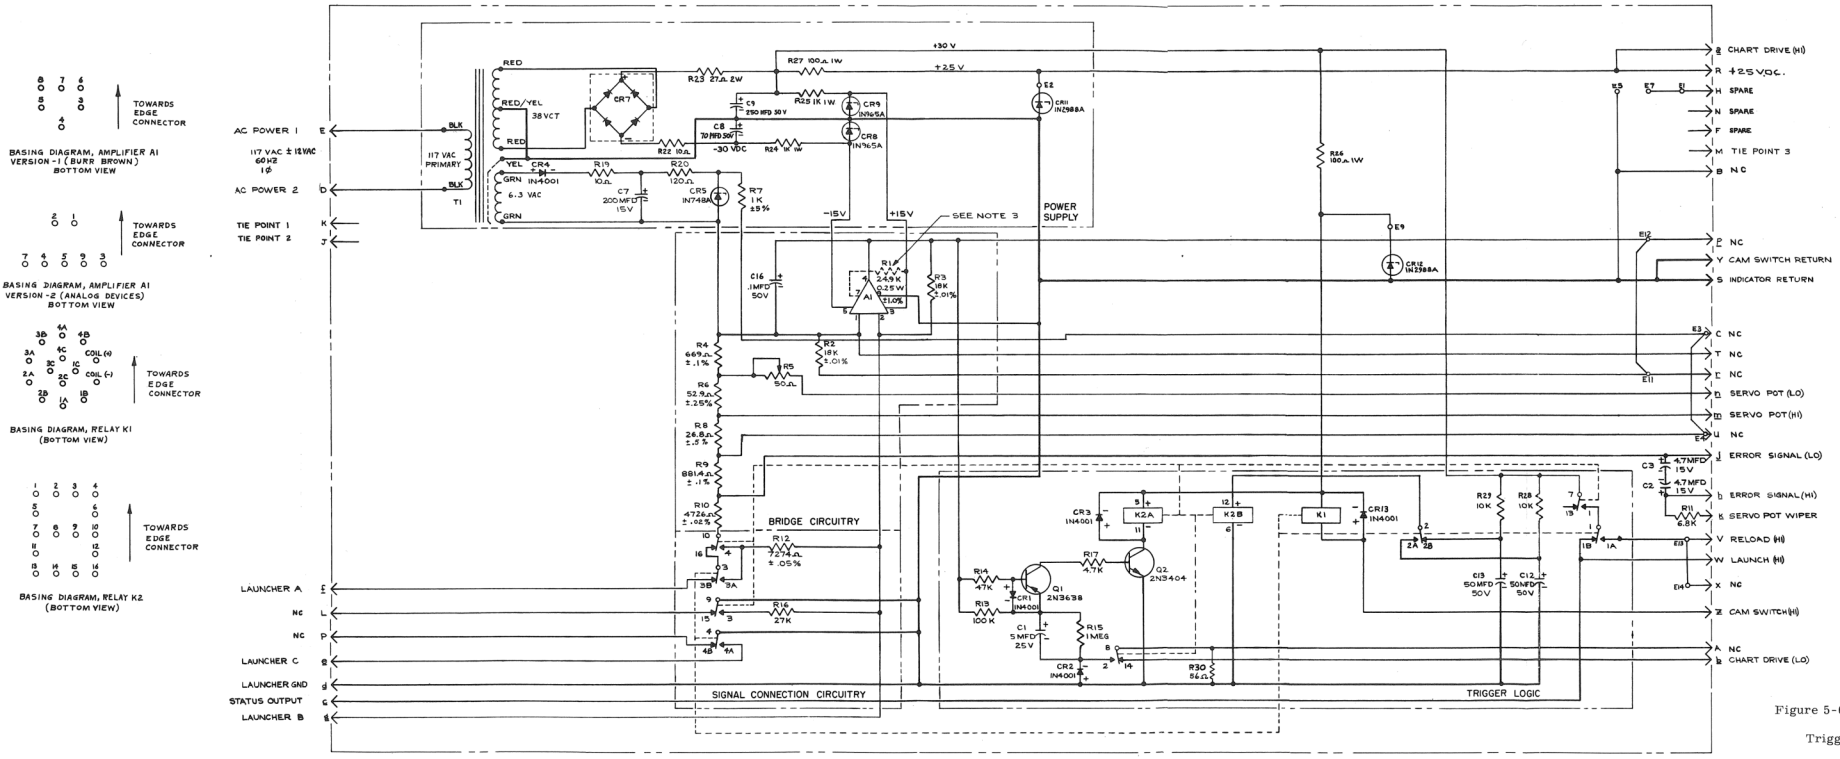

NOTES:
1. CIRCUIT SHOWN IN MEASURE MODE.
2. K1 IS A CONVENTIONAL RELAY; K2 IS MAGNETICALLY LATCHED.
3. R1 INSTALLED ONLY WHEN A1 IS ANALOG DEVICES INC P/N ES5288.
4. PREFIX ALL REF DES WITH 1A143.
5. UNLESS OTHERWISE NOTED ALL RESISTORS ARE ½W.
6. R1,R2,R3,R4,R6,R8,R9,R10 AND R12 ARE PRECISION WIRE WOUND RESISTORS.

HIGHEST REF DES: A1; C16; CR13; K2; Q2; R30; T1
REF DES NOT USED: C4,C5,C6,C10,C11,C14,C15; CR6,CR10; R18,R21

Figure 5-6. Schematic Diagram - Bridge Circuit, Trigger Logic and Power Supply - Revision K