PROPACK®

We Automate Your Solution



We Supply

FOOD & BEVERAGE PROCESSING & PACKAGING MACHINERY



PROPACK TECHNOLOGY ENTERPRISE


23, Lorong Asas Jaya 27, Kawasan Industry Ringan Asas Jaya,
14000, Simpang Ampat, Pulau Pinang, Malaysia.

Contact: +6012 593 1199 Jordan Oor

BUATAN MALAYSIA
MADE IN MALAYSIA

AUTOMATIC STAINLESS STEEL 304 VERTICAL FORM FILL & 3 SIDE SEAL PACKING MACHINE



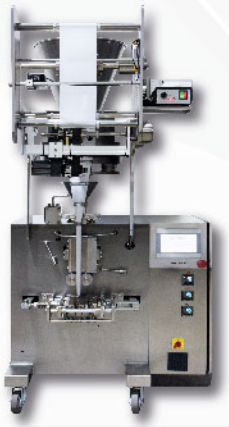

PREMIUM GRADE

10 YEARS WARRANTY (MAIN MOTOR)

MACHINE SPECIFICATIONS

· Film width:	50mm-200mm
· Bag length:	50mm-150mm
· Film thickness:	50 –100micron
· Inner film reel diameter:	75mm
· Outer film reel diameter:	300mm
· Voltage:	1 phase / 220V / 50Hz
· Total power:	2kw
· Speed per minute:	50-60 sachets

STANDARD COMPONENTS

- Color touch screen control panel.
- PLC Delta link intercommunication.
- Delta inverter
- Bag counter.
- Speed indicator.
- Bag length indicator.
- Easy bag length adjustment.
- Argon welding former
- Former vibrator.
- PANASONIC photocell sensor.
- OMRON digital temperature controller.
- Hardening cam system.
- Heavy-duty waterproof heater.
- Funnel volume: 20 liters
- Dimension(L*W*H): 1200 x 880 x 1720mm

ROTARY PUMP




COUNTING MACHINE



SMALL AUGER FILLER



CYLINDER PUMP





Kita Ada Sediakan Nasihat Kewangan Bank Untuk

Kemudahan Bagi Pembelian Mesin, Peralatan Dan Kenderaan Komersial Untuk Mengembangkan Kapasiti Perniagaan Anda

Tempoh Pembiayaan: Sembilan (9) Tahun

Margin Pembiayaan: Sehingga 90% Daripada Kos Aset

STAINLESS STEEL 304 AUTOMATIC PACKAGING MACHINE

COMPLETED WITH PRINTER



BACK SEAL SEALING

TECHNICAL SPECIFICATIONS

- PLC control, drive stepper motor to control the bag length, stable performance,easy to adjust and accurate.
- PID control to ensure the error range of temperature controlled within 1 degree Centigrade.
- Packing material：BOPP/Polyethylene, Aluminium/ Polyethylene, Paper/Polyethylene, Polyester/Aluminizer/ Polyethylene, Nylon/CPP and so on.

TECHNICAL PARAMETERS

· Volume	5-100 g (5-100 ml)
· Film width	60mm- 250mm
· Bag length	30mm -170mm
· Packing speed	30-70 bags/minute
· Dimension	730mm x 1000mm x 1600mm
· Weight	250kg
· Power	220v, 1 phase 50hz, 1.4kw



STAINLESS STEEL 304 AUTOMATIC PACKAGING MACHINE

COMPLETED WITH PRINTER



THREE SIDES SEALING

TECHNICAL SPECIFICATIONS

- PLC control, drive stepper motor to control the bag length, stable performance,easy to adjust and accurate.
- PID control to ensure the error range of temperature controlled within 1 degree Centigrade.
- Packing material：BOPP/Polyethylene, Aluminium/ Polyethylene, Paper/Polyethylene, Polyester/Aluminizer/ Polyethylene, Nylon/CPP and so on.

TECHNICAL PARAMETERS

· Volume	5-100 g (5-100 ml)
· Film width	60mm- 250mm
· Bag length	30mm -170mm
· Packing speed	30-70 bags/minute
· Dimension	810mm x 630mm x 1550mm
· Weight	300kg
· Power	220v, 1 phase 50hz, 1.4kw



AUTOMATIC STAINLESS STEEL 304 DUAL SERVO PACKAGING MACHINE

MODEL: PP-VPM420



MODEL: PP-VPM730



FEATURES

- User-friendly colors touch screen control panel.
- PLC for machine intercommunication.
- Real time indicator.
- Bag counter.
- Speed indicator.
- Bag length indicator.
- Easy bag length adjustment with length setting or photocell tracking.
- Custom made former rack roller to ensure smooth operation.
- Double unit cylinder with air regulator for adjusting the belt tension.
- Double unit cylinder with air regulator for adjusting the belt tension.
- Japanese fiber optic photocell for bag registration.
- Japanese digital temperature controller for back seal and jaw seal.
- All proximity read switches are non-contact switch.
- Bi-active horizontal seal bar.
- Heavy-duty cartridge heater.
- All product-contacted areas are in stainless steel AISI304 construction.
- Transparent see thru machine cover.

TECHNICAL PARAMETERS

	PP-VPM320	PP-VPM420	PP-VPM520	PP-VPM620	PP-VPM730
· Film Web Width	80-320mm	320-420mm	220-520 mm	260-620 mm	300-730 mm
· Bag Length	30-200mm	50-300 mm	80-350 mm	80-350mm	200-400 mm
· Packing Speed Range	30-60/MIN	30-60/MIN	20-80	20-60	10-50
· Power Supply	220V , 50HZ , 3.9KW	220V , 50HZ , 3.9KW	220V , 50HZ , 3.9KW	220V , 50HZ , 3.9KW	220V , 50HZ , 5KW
· Dimensions(L*W*H)	1115x800x1370mm	1530x970x1600mm	1560x1160x1530mm	1950x1390x2040mm	1820x1430x2000mm

STAINLESS STEEL 304 Z BUCKET CONVEYOR C/W
14 MULTIHEADS WEIGHER & PACKAGING MACHINE



MACHINE SPECIFICATIONS

· Heads No.:	14
· Weighing Range:	2–2000g
· Accuracy:	X(0.5)
· Max. Speed:	100 P/M
· Hopper Volume:	500ml
· Film Width:	460mm
· Bag Size:	60–250(L) × 60–170(W) mm
· Packing Speed:	40-100 Bags/Min
· Film Pulling Driven By:	Servo Motor
· Horizontal Sealing Driven By:	Servo Motor
· Power Requirement:	220V / 4.75KW / 50/60Hz
· Gas Consumption:	0.15m³/min
· Packing Dimension (mm):	1325(L) × 1071(W) × 2025(H)
· Gross Weight:	600kg

FREE **TAKE AWAY CONVEYOR**





- *Sus 304,*
- *1.5 Liter Buckets*
- *Including Vibrator*
- *Adjustable Speed*

STANDARD MULTIHEAD WEIGHER MAIN PART BRAND

1: Load Cell: Nmb Load Cell (Japan)	9: Wire Socket - Weidmuller (Germany)
2: Toshiba Ic (Japan)	10: The Base Plate - Weidmuller (Germany)
3: Schneider Switch (France)	11: Main Control Chip - Fujitsu (Japan)
4: Autonics Sensor (Korea)	12: Motor Driven - Toshiba (Japan)
5: Igus Bearing (Germany)	13: Data Storage Chip - Ramtron (U.S.A)
6: Touch Screen - Flexem, Wenview, Kinco	14: Photoelectric Coupling Chip - Toshiba (Japan)
7: Breaker - Delixi (Taiwan Or Can Be Cutomized)	15: Inverter Chip - Mornsun (Germany)
8: Power Supply Cable - Schneider (France)	16: Communication Chips - Sipex (U.S.A)

APPLICATION

It is suitable for weighing candy, seeds, jelly, pet foods, puffy foods, pistachio, peanuts, nuts, raisins, dried fruits, frozen foods, snack foods, hardwares, meatballs etc.

FEATURES

Bag type: Pillow bag, Gusset bag, Side seal bag.
Film type: A variety of laminated films, single-layer PE film.
Thickness range: 0.04mm~0.15mm.

MECHANICAL CHARACTER

- *High-precision and high resolution loadcell.*
- *1.6L hoppers can be widely used for a variety of common standard materials and standard weights.*
- *Integrated multihead weigher and vertical packer for fully automatic weighing, filling, printing, and packaging.*
- *Automatic fault alarm system ensures safe and reliable operation.*
- *Integrated control panel, man-machine interface touch screen, easy operation and maintenance.*
- *Equipped with servo motor, film puller, and optical tracker for precise bag length and color alignment.*
- *Horizontal sealing by servo motor with high speed and high efficiency.*
- *Cheap, economical, cost-effective and with low maintenance costs.*
- *Low height, small sizes for a variety of standard workshop and small places.*



SUITABLE PRODUCT TYPES




PILLOW POUCH

AUTOMATIC VERTICAL PACKING MACHINE

14 Multihead Weigher, Platform, Printer And Take Away Conveyor.

MACHINE SPECIFICATIONS

· Film Width	160~420mm
· Bag Size	L*W= (60~300) mm* (70~200) mm
· Packing Speed	100bags/min
· Film Pulling Driven System	Servo Motor
· Horizontal Sealing Driven System	Cylinder
· Voltage	4.5KW/220V/50 (60) HZ
· Gas Pression	0.6Mpa
· Gas Consumption	0.2m 3 /min
· Machine Dimension	L*W*H=1400mm*1100mm*1560mm
· Machine Weight	500Kg

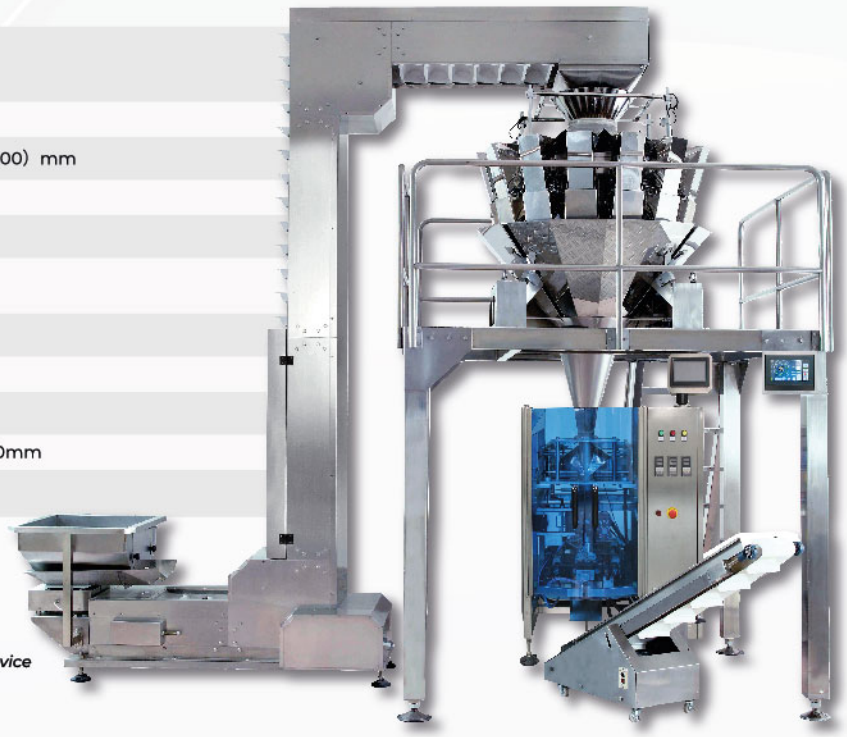

OPTIONAL DEVICE

1. Gusset Device
2. Vacuum Pulling-film
3. Chain Bag
4. Punching Device
5. Exhaust/ Inflatable Devices
6. Pe Film Sealing
7. Anti-static Electricity
8. Horizontal Seal Cooling Blowing Device
9. Upper Feeding Device
10. Bag-lifting Device

14 MULTIHEADS WEIGHER

FEATURES

- Special load cell with high precision and high standard.
- Program recovery function can reduce operation failures and support multi-segment
- Weight calibration
- No products auto pause function can improve weighing stability and accuracy
- Linear amplitude can be adjusted independently in the running
- Many languages available for global markets.
- 100 programs capacity can meet various weighing requirements

· Weighing Range	10-1000g
· Weighing Accuracy	X(0.5)
· Max. Weighing Speed	120P/M
· Hopper Volume	1.6/2.5l
· Control panel	7' Touch Screen
· Driving system	Step Rotor
· Power Requirements	220V/1500W/50/60Hz/10A
· Packing Dimension(mm)	1700(L)x1100(W)x1265(H)
· Gross WGT	475KG



SUITABLE PRODUCT TYPES



PILLOW POUCH

ROTARY PACKING MACHINE



TECHNICAL PARAMETERS

· Packing speed	35-300bags/min	· Heating power	3.8kW
· Bag former	(L)65-600mm, (W)30-150mm, (H)5-50mm	· Motor power	2.5kW
· Film width	65-400mm	· Total power	6.3kW
· Packing material	OPP/CPP, PT/PE,KOP/CPP,ALU-FOIL	· Weight	630kg
· Machine size	(L)4000MM x (W)900mm x (H)1600mm		







APPLICATION SCOPE

It is suitable for packing various solid regular objects, such as cake, bread, biscuit, daily items, hardware parts and so on.

ROTARY DOWN FILM PACKING MACHINE



TECHNICAL PARAMETERS

· Packing speed	35-150bags/min, 10-60bags/min (Free length)	· Heat power	3.8kW
· Bag size	(L)90-600mm, (W)30-140mm, (H)5-50mm	· Motor power	2.5kW
· Film width	65-380mm	· Total power	6.3kW
· Packing material	OPP/CPP, PT/PE,KOP/CPP,ALU-FOIL	· Weight	630kg
· Dimension	(L)4000MM x (W)960mm x (H)1400mm		

APPLICATION SCOPE

It is suitable for the packing of sticky, soft, long strips and other irregular items such as steamed cakes, candied fruits, wet paper towels, hardware parts, medicines, hotel disposable products, and vegetables and fruits.







ROTARY PACKING MACHINE



TECHNICAL PARAMETERS

· Packing speed	35-80bags/min	30-90bags/min
· Bag size	(L)200-600mm, (W)50-250mm, (H)20-100mm	(L)150-600mm, (W)50-250mm, (H)10-80mm
· Film width	200-600mm	
· Packing material	OPP/CPP, PT/PE,KOP/CPP,ALU-FOIL	
· Dimension	(L)4300MM x (W)1100mm x (H)1600mm	
· Total power	5.9kW	
· Weight	1000kg	





APPLICATION SCOPE

It is suitable for single combined packaging of bread, cake, hamburger, frozen steamed buns, material with supporting box, etc. It is easy to adjust and has stable performance.

BOX-MOTION PACKING MACHINE



TECHNICAL PARAMETERS

· Packing speed	35-120bags/min	30-60bags/min
· Bag former	(L)100-500mm, (W)50-200mm, (H)5-100mm	(L)180-500mm, (W)50-300mm, (H)5-140mm
· Film width	Max500mm	Max720mm
· Packing material	KNY+PE/KNY,+CPP/OPP+CPP/PET+CPP/PET+VMCPP	
· Machine size	(L)4000MM x (W)1139mm x (H)1680mm	(L)4300MM x (W)1250mm x (H)1700mm
· Total power	6.5kW	7kW
· Power and connection	Voltage:220V, Single phase: 50/60Hz, Air pressure: 0.6MPa	
· Weight	About 1400kg	

APPLICATION SCOPE

It is suitable for baking bread cakes, quick-frozen steamed buns, dumplings with trays, cooked food bags, burgers, etc. It is more advantageous for higher products.







AUTOMATIC CONTINUOUS STRETCH VACUUM PACKAGING MACHINE



EQUIPMENT FUNCTION

1. Photoelectric tracking, optional color cover film or light film for packaging, reduce costs and improve produ
2. The use of combined mold, easy to replace, a multi-purpose machine, the mold has a cooling system.
3. According to the user's product packaging requirements, equipped with automatic coding or coding system, or a laser coding system can be selected.
4. According to the packaging requirements of the user's products, on the basis of vacuuming, it can be packed with nitrogen or mixed gas.
5. Equipped with imported vacuum pump, high vacuum, stable quality, durable and reliable.
6. With a comer scrap recycling system to maintain environmental sanitation.
7. Using advanced cross-cutting, slitting system, computer tuning knife.

TECHNICAL PARAMETERS

· Width of the upper film	395-396(495-496)mm
· Width of the lower film	423(523)mm
· Vacuum	≤200pa
· Compressed air	≥0.6Mpa
· Power	380V/50HZ
· Capacity	14(18)KW
· Cooling water	≥0.15Mpa
· Overall dimensions	6500x980x1860(7200x1080x1860)mm















AUTOMATIC THERMOFORMING RIGID TRAY PACKAGING MACHINE WITH GAS FILLING



EQUIPMENT FUNCTION

1. According to the user's product packaging requirements, nitrogen or mixed gas can be flushed into the packaging on the basis of vacuum pumping
2. The imported wide open chain is suitable for stretching and forming of hard film and semi-hard film of various thickness.
3. The package has beautiful appearance and good sealing performance.

TECHNICAL PARAMETERS

· Width of the upper film	395-396(495-496)mm
· Width of the lower film	423(523)mm
· Vacuum	≤ 200Pa
· Compressed air	≥ 0.6Mpa
· Filling gas pressure	≥ 0.2Mpa
· Gas interface	Ø12PU tube
· Power	380V/50HZ
· Capacity	16(20)KW
· Cooling water	≥ 0.15Mpa
· Overall dimensions	6500x980x1860 (7200x1080x1860)mm







AUTOMATIC BARRELED WATER PRODUCTION LINE





TECHNICAL PARAMETERS

	PP-QGF-100	PP-QGF-240	PP-QGF-300	PP-QGF-450	PP-QGF-600	PP-QGF-900	PP-QGF-1200
• Filling heads	1	2	2	3	4	6	12
• Volume (Gallon)	3 & 5	3 & 5	3 & 5	3 & 5	3 & 5	3 & 5	3 & 5
• Capacity (B/H)	60-100	100-240	250-300	400-450	600-800	800-900	1000-1200
• Gas pressure (Mpa)	0.4-0.6	0.4-0.6	0.4-0.6	0.4-0.6	0.6	0.6	0.6
• Motor power (KW)	1.38	1.75	3.8	3.8	7.5	9.75	13.5
• Rated voltage	380V/50HZ	380V/50HZ	380V/50HZ	380V/50HZ	380V/50HZ	380V/50HZ	380V/50HZ
• Weight	680kg	800kg	1500kg	2100kg	3000kg	3500kg	4500kg

LINEAR FILLING MACHINE

MODEL: PP-LFM-1










TECHNICAL PARAMETERS

• Filling nozzle	4-20 nozzles
• Filling volume	50-5000ml
• Capacity (B/H)	4000
• Filling accuracy	≥99%
• Bottle size	40-100mm (diameter) 80-300mm (height)
• Gas cansumption	0.6m3/min
• Work pressure (Mpa)	0.55-0.65
• Machine power (KW)	1.5
• Size (LxWxH)	2500x1600x2500mm
• Weight	700kg

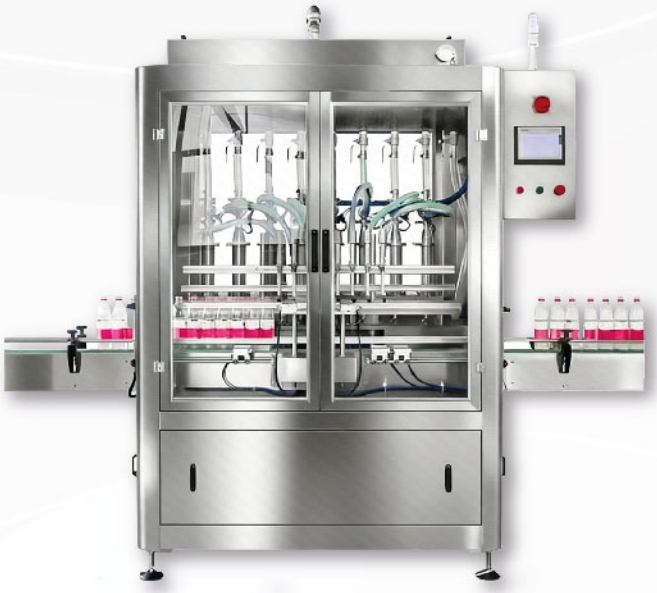

AUTOMATIC TRACKING FILLING MACHINE

PRODUCT CONFIGURATION

NAME	BRANDING
· Touch Screen	Siemens
· PLC	Siemens
· Solenoid Valve	AirTAC
· Bottle Inspection Photoelectric	Omron
· Proximity Switch	Schneider
· Air Source Treatment	AirTAC
· Inverter	Siemens
· Relay	Schneider
· Alarm	China
· Button And Low Voltage Electric Appliance	Schneider



TECHNICAL PARAMETERS

	PP-MIC-ZFG-2	PP-MIC-ZFG-4	PP-MIC-ZFG-6
· Filling Nozzle	2	4	6
· Filling Volume	50ml-5L	50ml-5L	50ml-5L
· Capacity	1500BPH(500ml)	3000BPH(500ml)	4500BPH(500ml)
· Filling Accuracy	≥99%	≥99%	≥99%
· Power Supply	380V, 50/60HZ	380V, 50/60HZ	380V, 50/60HZ
· Working Pressure	0.6-0.8Mpa	0.6-0.8Mpa	0.6-0.8Mpa
· Machine Power	9KW	9KW	9KW
· Dimension	1800x2000x2300mm	2400x2000x2300mm	2800x2000x2300mm
· Weight	600kg	850kg	1000kg



AUTOMATIC LIQUID FILLING 3 IN 1 MONOBLOC MACHINE
(WASHING, FILLING, AND CAPPING)





TECHNICAL PARAMETERS

	PP-CGF-12/12/1	PP-CGF-15/15/5	PP-CGF-24/24/8
• Capacity (B/H)	1000-1500	1500-2000	2500-3000
• Total Power (KW)	2.2	3	4


TECHNICAL PARAMETERS

	PP-CGF-8/8/4	PP-CGF-8/8/4	PP-CGF-8/8/4	PP-CGF-8/8/4	PP-CGF-8/8/4	PP-CGF-8/8/4	PP-CGF-8/8/4	PP-CGF-8/8/4
• Capacity (B/H)	2000-3000	3000-4000	5000-6000	8000-10000	10000-12000	12000-14000	14000-16000	20000-24000
• Suitable bottle shape	Round or Square							
• Bottle diameter (mm)	Ø50 - Ø100							
• Bottle height (mm)	50-320							
• Compressed air pressure (Mpa)	0.3-0.7							
• Washing medium	Purified Water							
• Washing water pressure (MPa)	0.06-0.2							
• Total power (KW)	3	3.1	3.1	3.8	5.6	5.6	7.2	9
• Size (LxWxH)	2000x1500x2200	2400x1600x2400	2400x1830x2400	3100x2200x2400	3600x2500x2400	3750x2600x2400	4000x2800x2400	4500x3300x2400
• Weight (kg)	3200	4000	6500	6500	7500	7500	8500	9000







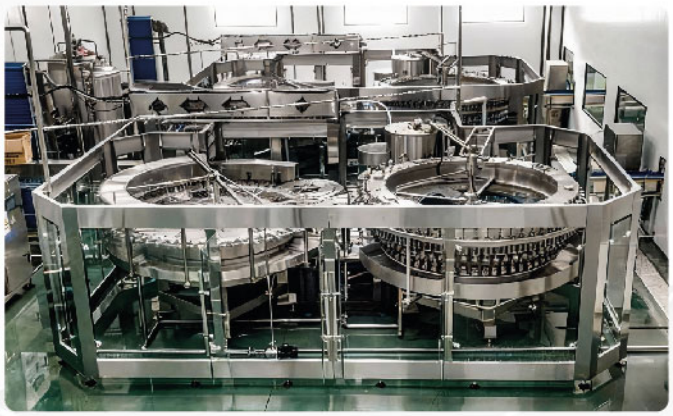





50L VACUUMEMULSIFYING HOMOGENIZER MIXER

ALL CONTACT MATERIAL PARTS STAINLESS STEEL 316L, MIDDLE LAYER & SURFACE STAINLESS STEEL 304

1. All Mixing Motor: Germany Siemens
2. Invert speed control: Germany Siemens
3. Electric component: France Schneider
4. Temperature probe: PT100 + Omron display
5. Bearing- NSK from Japan

TECHNICAL PARAMETERS

THREE JACKETS:	***TOP HELICAL MIXING WITH SCRAPER***
· Internal layer: SUS316L 4mm	· Speed: 0–63 rpm
· Middle layer: SUS304 3mm	· Power: 2.2KW
· External layer: SUS304 3mm	
	BOTTOM HOMOGENIZER:
HYDRAULIC LIFTING & TILTING	· Speed: 0–2880 rpm
· 1.5KW	· Power: 3KW
ELECTRIC HEATING: 9KW	***AUTOMATIC PNEUMATIC BOTTOM DISCHARGE VALVE***



VACUUM PUMP

- Power: 1.45 KW
- water cycled type
- including tap water inlet & outlet pipes

PIPE CONNECTION

- within mixer area
- Sanitary manual valve control
- tap water pipes
- waste discharge pipes



50L VACUUM EMULSIFYING MIXER







TOP HOMOGENIZER





TILTING POT





HELICAL MIXING BLADE, FULLY MIXING & EASY CLEANING

BABY FOOD
FBF FOOD
PRODUCTION LINE

TWIN-SCREW EXTRUDER



TECHNICAL PARAMETERS

	HM65 Extruder Line	HM70 Extruder Line	HM85 Extruder Line
• **Installed Power**	77kw	108kw	150kw
• **Power Consumption**	50kw	75kw	100kw
• **Production Capacity**	100-150kg/h	200-260kg/h	400-500kg/h
• **Dimension**	19000×1300×2200mm	21000×1300×2200mm	30000×1500×2600mm



1. Mixer	5. Dryer
2. Screw conveyor	6. Screw conveyor
3. Twin-screw extruder	7. Grinding Group
4. Air conveyor	

SUITABLE PRODUCT TYPES



PET FOOD / AQUATIC FEED PRODUCTION LINE




TWIN-SCREW EXTRUDER

TECHNICAL PARAMETERS

	HM65 Extruder Line	HM70 Extruder Line	HM85 Extruder Line	HM90 Extruder Line	HM95 Extruder Line
• **Input Voltage**	380V/50HZ	380V/50HZ	380V/50HZ	380V/50HZ	380V/50HZ
• **Installed Power**	70kw	90kw	120kw	96kw	180kw
• **Power Consumption**	40kw	50kw	100kw	80kw	120kw
• **Production Capacity**	120-150kg/h	200-250kg/h	400-500kg/h	800-1000kg/h	800-1000kg/h
• **Dimension**	22000×1200×2200mm	24000×1500×2200mm	28000×3500×2300mm	30000×3500×2300mm	45000×2500×2500mm

1. Mixer
2. Bucket elevator
3. Twin-screw extruder
4. Air coveyor
5. Dryer
6. Hoister
7. Oil sprayer
8. Double roller flavoring line
9. Hoister
10. Cooler

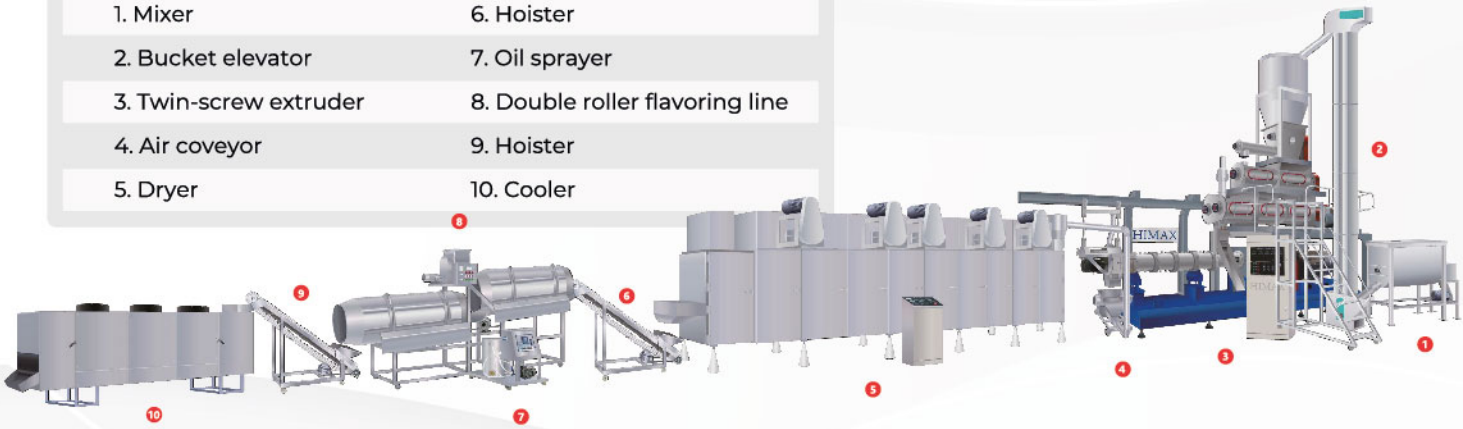



SUITABLE PRODUCT TYPES

ARTIFICIAL RICE PRODUCTION LINE

TWIN-SCREW EXTRUDER



TECHNICAL PARAMETERS

	HM70 Extruder Line	HM85 Extruder Line
• Installed Power	96.5kw	165kw
• Power Consumption	60.5kw	103kw
• Production Capacity	180-240kg/h	300-400kg/h
• Dimension	20000×1500×2200mm	22000×3500×2300mm



1. Mixer	5. Air conveyor
2. Screw conveyor	6. Dryer
3. Twin-screw extruder	7. Cooling conveyor
4. Vibratory cooling machine	

SUITABLE PRODUCT TYPES



CORN FLAKES OR BREAKFAST CEREAL PRODUCTION LINE



TWIN-SCREW EXTRUDER

TECHNICAL PARAMETERS

	HM65 Extruder Line	HM70 Extruder Line	HM85 Extruder Line
• Installed Power	140kw	194kw	245kw
• Power Consumption	90kw	147kw	185kw
• Production Capacity	120-150kg/h	180-240kg/h	300-500kg/h
• Dimension	39000×1200×2200mm	41000×1500×2200mm	43000×3500×2300mm



1. Mixer	7. Air conveyor	13. Flavoring machine
2. Screw conveyor	8. Dryer	14. Sugar spraying line
3. Twin-screw extruder	9. Hoister	15. Hoister
4. Ibrate feeder	10. Vitrate feeder	16. Dryer
5. Air conveyor	11. Hot air puffing dryer	17. Cooling conveyor
6. Flaking machine	12. Hoister	

SUITABLE PRODUCT TYPES



LIFTER BIN



EFFICIENT MATERIAL HANDLING SYSTEM

- This equipment is designed for the transfer and charging of solid materials.
- It integrates seamlessly with bin blenders, tablet machines, and capsule filling machines, making it suitable for pharmaceutical, chemical, and food industries.
- When the bin is positioned into the lifting arm, the system automatically raises or lowers it through an electric gear motor, ensuring smooth material lifting, transfer, and discharge.

HYGIENIC & GMP-COMPLIANT DESIGN

- The bin is constructed from high-quality stainless steel with both internal and external mirror polishing, eliminating dead angles and ensuring full compliance with GMP standards.
- Its sealed transportation system effectively prevents contamination, minimizes dust dispersion, and avoids cross-contamination throughout the production and transfer process.

TECHNICAL PARAMETERS

Model	BN100	BN200	BN300	BN500	BN800	BN1000
Bin volume (L)	100	200	300	500	800	1000
Lift motor power (kW)	0.75	1.5	2.2	2.2	3	4

UV LASER PRINTING MACHINE (3W / 5W)



PRODUCT SPECIFICATIONS

Laser Power	: 3W / 5W
Machine Weight	: 85 kg
Cooling Method	: Water Cooling
Laser Source	: UV Laser Generator
Scanning System	: High-precision dual-axis galvanometer system
Positioning Method	: Red light preview, red light positioning
Interface	: SD Card, USB 2.0, Communication Port
Laser Wavelength	: 355 nm
Machine Dimensions	: 1580 × 750 × 1000 mm

PERFORMANCE & APPLICATION

Marking Speed (Reference)	: Foil food packaging: 70 m/min Daily chemical bottles: 12,000 bottles/hour
Marking Area	: 110 × 110 mm
Applicable Materials	: Composite film, aluminum foil, PET, PP, glass, ceramics, plastics, metals, cables, and electronic components



SINGLE-STATION FUME EXTRACTOR

Specification	: Value
Brand	: An Jing Lang
Rated Power	: 200W
Airflow	: 350 m^3/h
Air Pressure	: 3000 Pa
Smoke Removal Efficiency	: 99.97%
Filtration Level	: Four-Stage Filtration
Power Supply	: AC 220V
Product Dimensions	: 430 × 240 × 500 mm (L × W × H)
Flexible Hose	1.4 m × Ø75 mm

HEAVY DUTY RIBBON MIXER (300LIT)

PRODUCT FEATURES

Design and Construction

- Robust Construction: Made from high-quality stainless steel 304 to ensure durability and resistance to corrosion.
- Sanitary Design: Smooth surfaces & easy-to-clean components to meet sanitary standards, suitable for food & pharmaceutical industries.
- Sealed Bearings: To prevent contamination and ensure long-lasting operation.

Mixing Efficiency

- Dual Helical Ribbon Agitators: Inner and outer ribbons designed to move materials both radially and laterally for thorough mixing.
- Versatile Mixing Capacity: Efficient mixing for both small and large batches.

Ease of Operation

- User-Friendly Controls: Simple and intuitive control panel for easy operation and adjustments.
- Optional-Variable Speed Drive: Allows adjustment of mixing speed to suit different materials and mixing requirements.
- Easy Discharge: Designed with a full-length discharge gate for quick and complete product release.

Safety Features

- Safety Interlocks: Prevents operation unless all safety guards are in place.
- Safety Grid: Protects workers from damage .



TECHNICAL PARAMETER

Model	: PP-RM-300	**Tank plate thickness**	: 3 mm
Mixing Volume / Batch	: 300 L	**Motor Power**	: 5.5 KW
Total tank volume	: 420 L	**Discharge height**	: Standard height:600mm **It can be customized**
Rotation speed	: 46 RPM	**Power Supply**	: 3 phase, 415V 50HZ
Ribbon thickness	: 6 mm	**Dimension(L*W*H)**	: 1550*970*1650 mm
Side plate thickness	: 8 mm	**Weight**	: 350 Kg

STAINLESS STEEL 304 ELECTROMAGNETIC HEATING COOKER (700 LIT)



PRODUCT SPECIFICATIONS

2 Unit Heavy Duty Industrial Safety Valve	**Temperature can be setting as well as timer.**
Tank thickness: 8mm	**Use hydraulic open cover and close cover.**
No added thermal oil, 100% no thermal oil leakage problem.	**Use hydraulic to lifted the tank.**
Body material: SUS 304 meet the food grade standard.	**Inner cooking tank pressure:** 0.25Mpa, working pressure: 0.20Mpa
Inner tank thickness: SUS 304 8mm	**Maximum inside cooking tank temperature:** 125℃
Outer tank thickness: SUS 304 3mm	**Total KW:** 51.5KW, 72 amp (recommend install 100amp)
Cooking tank diameter: 1200mm, **Deep:** 850mm	**Control panel:** control 3 type temperature with time and temperature setting.
Hydraulic system: 3 phase, 1.5kw, 415v, 50hz	**Weight:** 680kg
	Dimension: 2000MM X 2100MM X 2000MM (LXWXH)

COFFEE ROASTER (20KG)



PRODUCT FEATURES

- ***Chaff Collector Included***
- ***Easy Operation***
- ***Sample Spoon & Glass Viewing Window***
- ***Separate Chaff Collection System***
- ***Simultaneous Roasting & Cooling***
- ***High Capacity Cooling Suction Fan***
- ***Digital Bean Thermometer***
- ***Stainless Steel Drum Construction***
- ***Digital Temperature Control Unit & Alarm System***

TECHNICAL SPECIFICATIONS

Number of Motors	: 4 Motors	**Roasting Type**	: Thermal Roasting
Power Supply	: 15 Amp, Single Phase	**Roasting Time**	: 17–20 Minutes per Batch
Motor Speed	: 1400 RPM	**Dimensions (L × W × H)**	: 160 × 85 × 190 cm
Frequency	: 50–60 Hz	**Weight**	: 450 kg
Voltage	: 220–240V		
Fuel Options	: LPG / NG Available		





THANK YOU

PROPACK®
We Automate Your Solution

CONTACT US

Jordan Oor +6012 593 1199 | **Hong** +6012 413 8288

OUR ADDRESS

23, Lorong Asas Jaya 27,
Kawasan Industry Ringan Asas Jaya,
14000, Simpang Ampat, Pulau Pinang, Malaysia.