## Control Rod Worth Calibration Generated January 25, 2021

Control rod worths

Safe Rod	\$2.61
Shim Rod	\$2.83
Reg Rod	\$1.25
Total	\$6.70

Peak reactivity addition rates for each control rod

	Max. Add. Rate	Max. Add. Rate	$\operatorname{Spec}$	OK?
Safe	$3.40~{ m c}/\%$	$6.77~\mathrm{c/sec}$	< 12  ¢/sec	OK
Shim	$3.89~{ m c}/\%$	$4.95~\mathrm{c/sec}$	< 12  ¢/sec	OK
Reg	$1.88~{ m c}/\%$	$5.16~\mathrm{c/sec}$	< 12  ¢/sec	OK


Plots of the original data, and polynomials of best fit, are on the next page.

Core excess and shutdown margin

The core excess is calculated twice: once using the Safe Rod at its lowest critical point with the other two rods removed, and once using the Shim Rod in the same configuration. Both values of the CXS are given here; they should be nearly equal.

The shutdown margin and one-stuck-rod SDM are also calculated using each value of the CXS. For the "one stuck rod" rule, we assume that the most reactive control rod, in this case the **Shim Rod**, is completely withdrawn.

	Safe	Shim	Spec	OK?
CXS height	49.5%	53.8%		_
Core excess	\$1.25	\$1.24	< \$3.00	OK
Shutdown margin	\$5.45	\$5.46	> \$1.00	OK
One-stuck-rod SDM	\$2.61	\$2.63	> \$0.50	OK
			/	
Operator Signature				Date

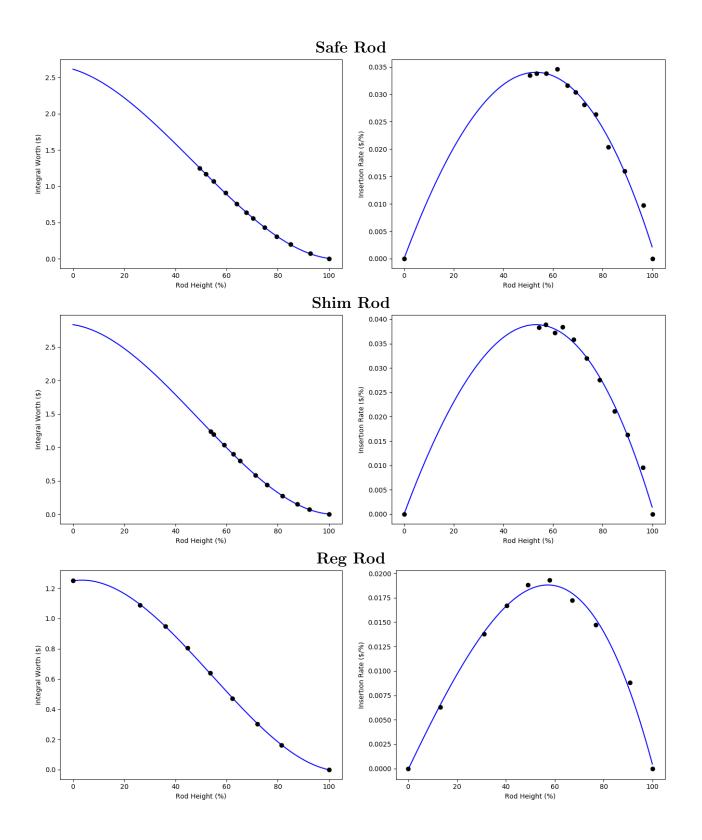

Safe Int. Worth:  $(3.66827 \times 10^{-6}) \, x^3 + -0.000520251 \, x^2 + -0.0107719 \, x + 2.61465$ Safe Add. Rate:  $(-2.47559 \times 10^{-8}) \, x^3 + (-9.4415 \times 10^{-6}) \, x^2 + 0.00121182 \, x + (-4.19028 \times 10^{-6})$ Shim Int. Worth:  $(4.76217 \times 10^{-6}) \, x^3 + -0.000703023 \, x^2 + -0.00562901 \, x + 2.83329$ Shim Add. Rate:  $(-3.38706 \times 10^{-8}) \, x^3 + (-1.01585 \times 10^{-5}) \, x^2 + 0.0013673 \, x + (-6.80163 \times 10^{-6})$ Reg Int. Worth:  $(2.40791 \times 10^{-6}) \, x^3 + -0.000392507 \, x^2 + 0.00266926 \, x + 1.24955$ Reg Add. Rate:  $(-4.24349 \times 10^{-8}) \, x^3 + (-9.49321 \times 10^{-7}) \, x^2 + 0.000524058 \, x + -0.000119569$