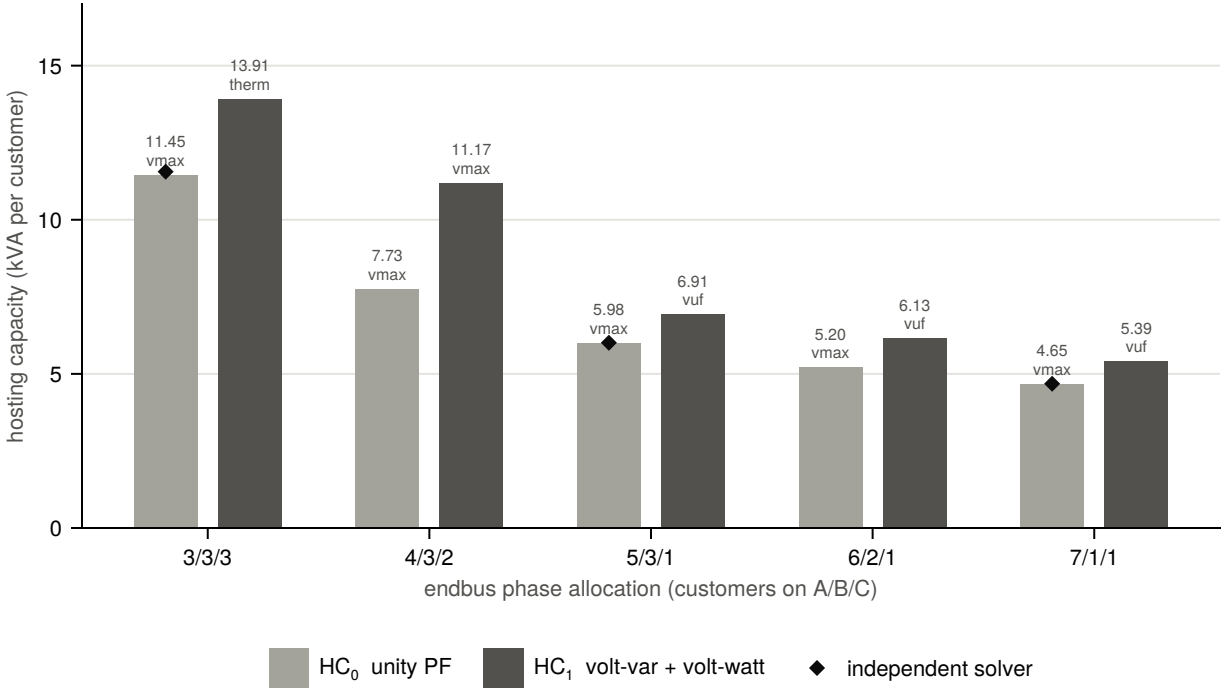
15
10
5
0
hosting capacity (kVA per customer)
11.45
vmax
13.91
therm
7.73
vmax
11.17
vmax
5.98
vmax
6.91
vuf
5.20
vmax
6.13
vuf
4.65
vmax
5.39
vuf
3/3/3
4/3/2
5/3/1
6/2/1
7/1/1
endbus phase allocation (customers on A/B/C)
HC0 unity PF
HC1 volt-var + volt-watt
independent solver