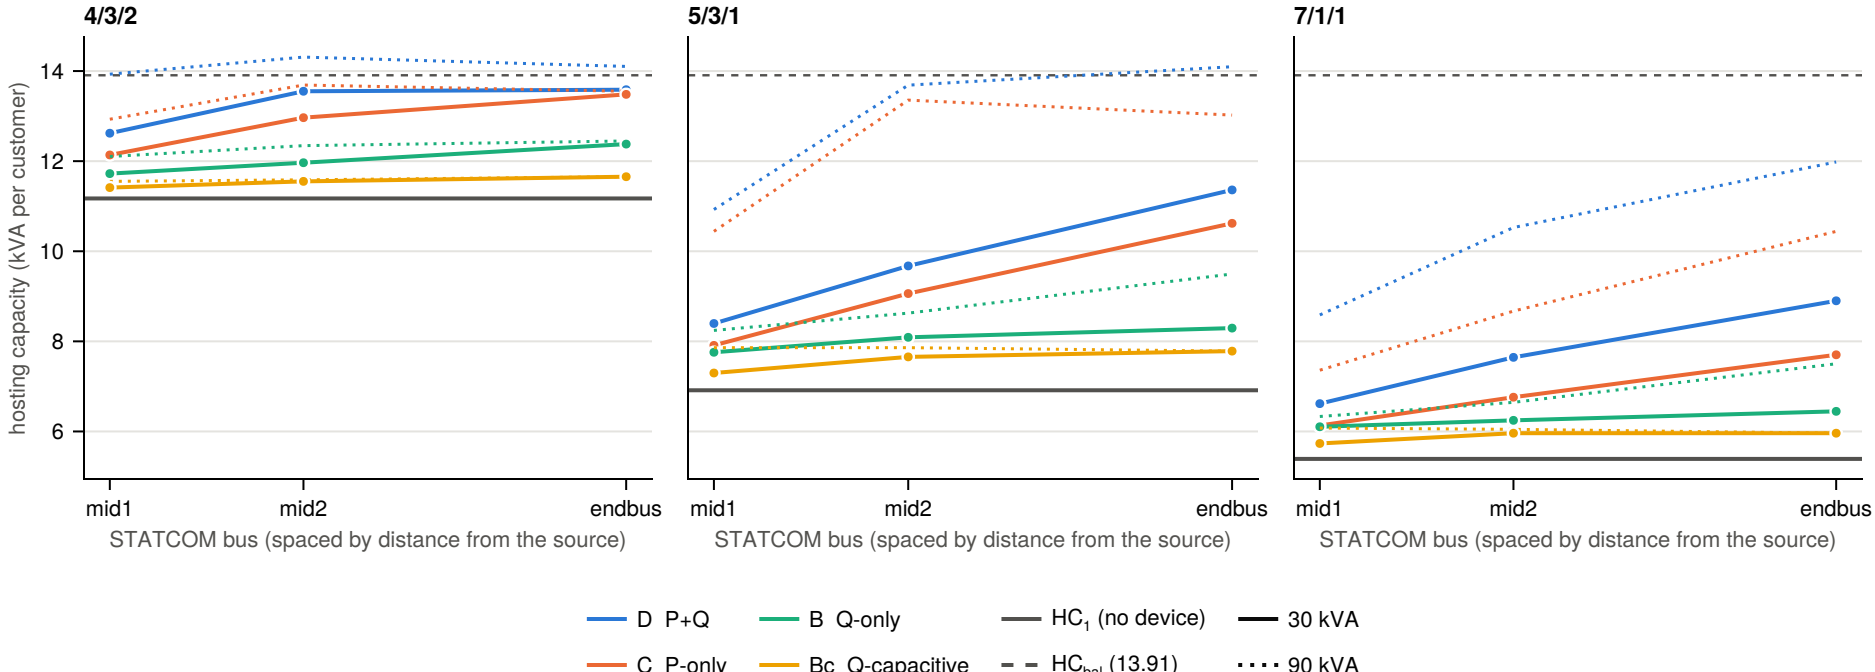
4/3/2
5/3/1
7/1/1
hosting capacity (kVA per customer)
14
12
10
8
6
mid1
mid2
endbus
STATCOM bus (spaced by distance from the source)
D P+Q
C P-only
B Q-only
Bc Q-capacitive
HC1 (no device)
HCbal (13.91)
30 kVA
90 kVA