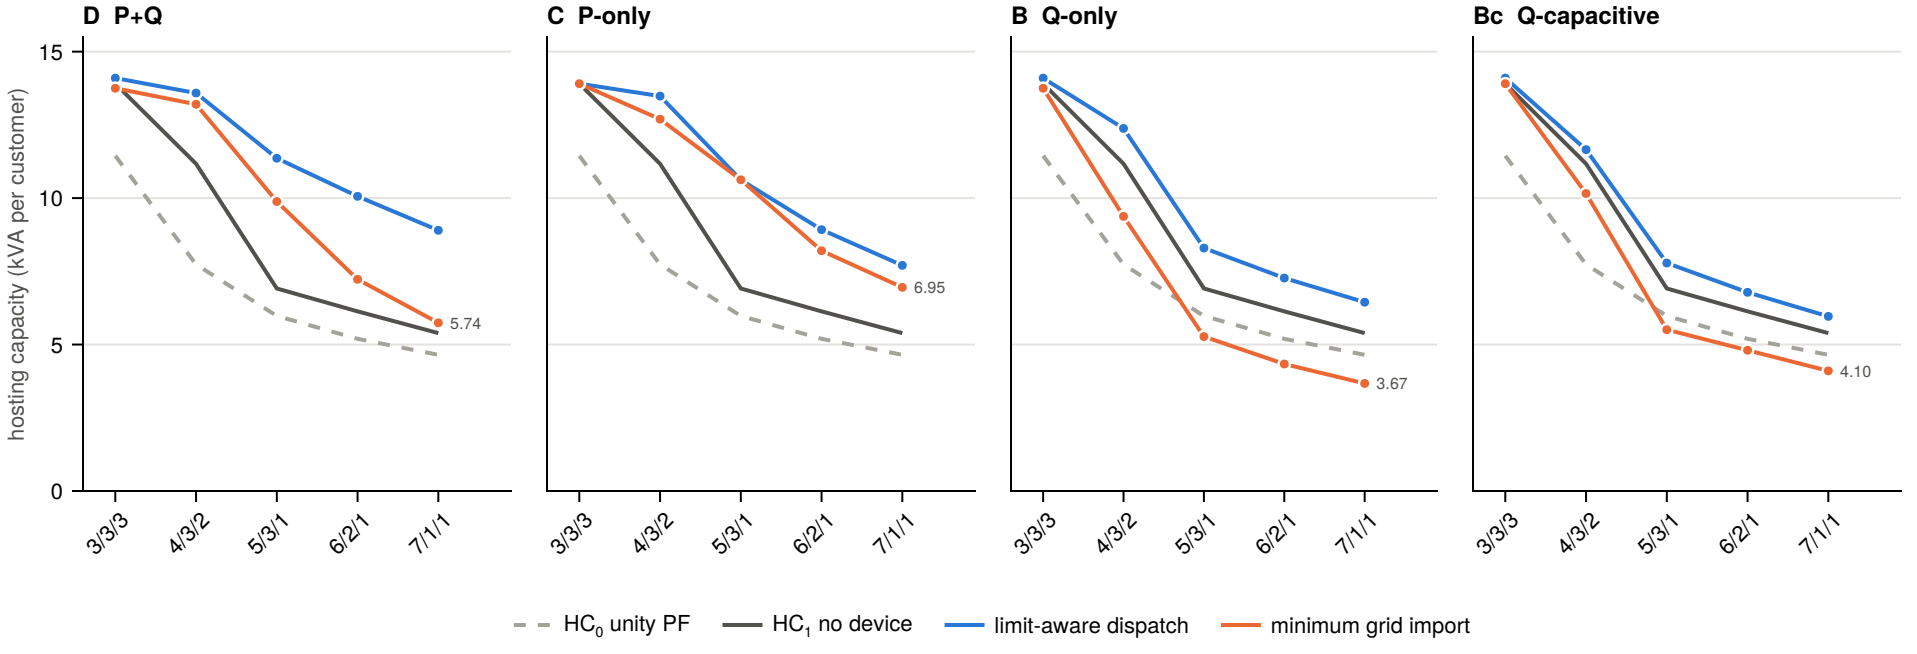
D P+Q
C P-only
B Q-only
Bc Q-capacitive
hosting capacity (kVA per customer)
15
10
5
0
3/3/3
4/3/2
5/3/1
6/2/1
7/1/1
5.74
6.95
3.67
4.10
HC0 unity PF
HC1 no device
limit-aware dispatch
minimum grid import