
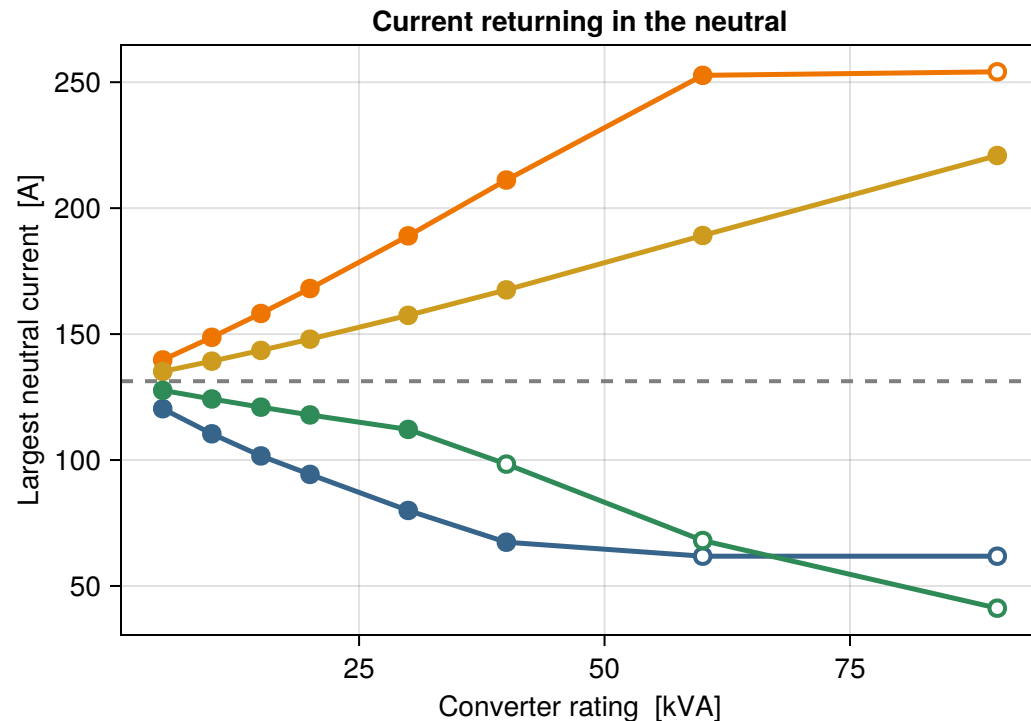


Effect of converter rating — 7/1/1 lots per phase

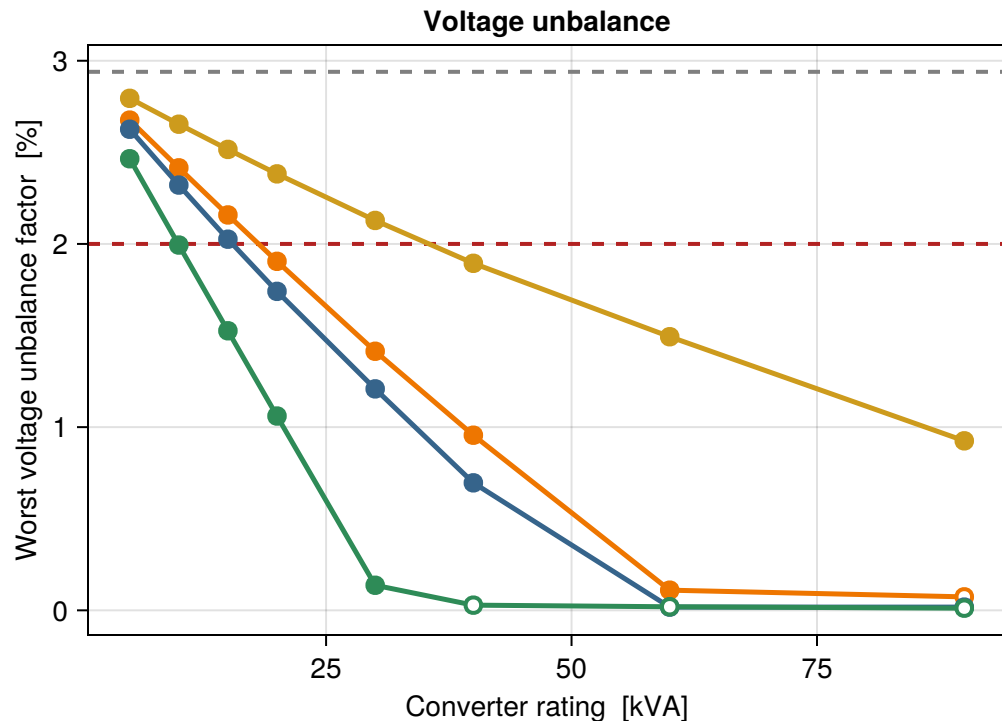

- Reactive only (both signs)
- Real power exchange only
- - No STATCOM
- running at its limit
- Reactive only (capacitive)
- Real + reactive
- - 2% limit
- capacity to spare