



# M/S. U.K. ENTERPRISE

Govt. Approved (Class I) Contractor ,

*Deals with all Electrical , Civil works & Consultant*

**UDYAM REGISTRATION NO. UDYAM-AS-03-0005077**

Dr. R.P. Road, Dispur, Guwahati-781006, Ph.98643-46349,90853-90161 Email: babultalukdar@gmail.com

No. UKE/ BMC/2026-27/ 144

Date 23.06.2026

To  
The Chief General Manager(D&S)  
APDCL (LAR), Bijulee Bhawan ,  
Paltan Bazar , Guwahati -1

Sub:- Approval of GTP and Drawing

Ref:- 1. LOA No. CGM(D&S)/APDCL/LAR/Bongaigaon Medical College /2025-26/38  
Dt. 13.05.2026

Sir,

With reference to the above , we have the honour to forward herewith the GTP and Drawing of the following materials for favour of according necessary approval from your end .

The details are as follows :-

| Sl. No. | Item Description                         | Name of Manufacturer                                                                 | Remarks |
|---------|------------------------------------------|--------------------------------------------------------------------------------------|---------|
| 1       | AAAC Covered Conductor , 1cr. 241 sq. mm | M/S. Havells India limited<br>Alwar, Rajasthan ,<br>India ,<br>Mobile No. 9864783339 |         |

The above materials will be utilised for Construction of 33kV Dedicated Medical College Feeder from 132/33kV Dhaligaon GSS to the premises of the Bongaigaon Medical College, Majgaon and associated work under Bongaigaon ESD-I under Deposit Work Scheme

Thanking you in anticipation and assuring our best service in future .

Enclo. : As above

Yours faithfully  
Authorised Signatory

M/S. U.K. Enterprise ,  
Dispur , Guwahati -06



|                                                                                   |                                                                                                                                      |                                                    |                                                                                                                                            |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| NAME OF THE CONTRACTOR: M/s. U.K. ENTERPRISE                                      |                                                                                                                                      |                                                    |                                                                                                                                            |
| NAME OF THE PROJECT: Bongaigaon Medical College                                   |                                                                                                                                      |                                                    |                                                                                                                                            |
| NAME OF THE CLIENT: Assam Power Distribution Company Limited                      |                                                                                                                                      |                                                    |                                                                                                                                            |
| LOA NO.: CGM(D&M)/APDCL/LAR/Bongaigaon Medical College/2025-26/38 Dt. 13.05.26    |                                                                                                                                      |                                                    |                                                                                                                                            |
| NAME OF THE MANUFACTURER: HAVELLS INDIA LIMITED                                   |                                                                                                                                      |                                                    |                                                                                                                                            |
| CABLE DETAILS: 1X241 AAAC MVCC                                                    |                                                                                                                                      |                                                    |                                                                                                                                            |
| VOLTAGE GRADE 33KV                                                                |                                                                                                                                      |                                                    |                                                                                                                                            |
|  |                                                                                                                                      | <b>HAVELLS INDIA LTD. (CABLE DIVISION) - ALWAR</b> |                                                                                                                                            |
| Technical Particulars                                                             |                                                                                                                                      |                                                    |                                                                                                                                            |
| Our Ref. No. : HIL/GTP/YY/2026, Dated -19.06.2026                                 |                                                                                                                                      | AAAC COVERED CONDUCTOR                             |                                                                                                                                            |
| S.N                                                                               | Descriptions                                                                                                                         | Unit                                               | 241 SQ. MM                                                                                                                                 |
| 1                                                                                 | Name of Manufacturer.                                                                                                                |                                                    | HAVELLS INDIA LIMITED                                                                                                                      |
| 2                                                                                 | Applicable Standard to which cable conforms                                                                                          |                                                    | GENERALLY CONFIRMING TO IS -398 PT-IV / EN 50397-1                                                                                         |
| 3                                                                                 | Type of cable                                                                                                                        |                                                    | AAAC COVERED CONDUCTOR                                                                                                                     |
| 4                                                                                 | Voltage Grade                                                                                                                        | KV                                                 | 33                                                                                                                                         |
| 5                                                                                 | Phase Conductor detail                                                                                                               |                                                    |                                                                                                                                            |
|                                                                                   | ~ Conductor material                                                                                                                 |                                                    | AAAC CONDUCTOR as per IS : 398-IV                                                                                                          |
|                                                                                   | ~ Nominal cross-sectional Area                                                                                                       | mm <sup>2</sup>                                    | 241                                                                                                                                        |
|                                                                                   | ~ Number of strands / Nom. dia of strands                                                                                            | No.                                                | 19/4.02                                                                                                                                    |
|                                                                                   | ~ Form of conductor                                                                                                                  | mm                                                 | Stranded Non-Compacted circular                                                                                                            |
|                                                                                   | ~ Breaking Load of conductor                                                                                                         | KN                                                 | 70.61                                                                                                                                      |
|                                                                                   | ~ Longitudinal Water Blocking                                                                                                        |                                                    | Yes                                                                                                                                        |
| 6                                                                                 | Screening on Conductor :                                                                                                             |                                                    | Suitable extruded Water Blocking layer shall be provided over central strand & in between layers of conductor                              |
|                                                                                   | ~ Type & Material.                                                                                                                   |                                                    | Semiconducting Compound by extrusion                                                                                                       |
|                                                                                   | ~ Approx. Thickness of semiconducting part                                                                                           | mm                                                 | 0.30                                                                                                                                       |
| 7                                                                                 | Insulation :                                                                                                                         |                                                    |                                                                                                                                            |
|                                                                                   | ~ Material.                                                                                                                          |                                                    | XLPE                                                                                                                                       |
|                                                                                   | ~ Nominal thickness                                                                                                                  | mm                                                 | 2.43                                                                                                                                       |
|                                                                                   | ~ Colour                                                                                                                             |                                                    | Natural                                                                                                                                    |
| 8                                                                                 | Outer covering :-                                                                                                                    |                                                    |                                                                                                                                            |
|                                                                                   | ~ Material.                                                                                                                          |                                                    | (Track Resistant , Erosion resistant & UV Resistant)                                                                                       |
|                                                                                   | ~ Nominal thickness                                                                                                                  | mm                                                 | 1.20                                                                                                                                       |
|                                                                                   | ~ Colour                                                                                                                             |                                                    | BLACK                                                                                                                                      |
| 9                                                                                 | Standard drum length                                                                                                                 | Mtrs.                                              | 1000 ± 5%                                                                                                                                  |
| 10                                                                                | Non Standard Drum length                                                                                                             | %                                                  | Max. 5% of ordered quantity                                                                                                                |
| 11                                                                                | Allowable max. cond. Temp. when carrying cont. rated current (Temp. at which water blocking material shall remain stable)            | Deg. C                                             | 90                                                                                                                                         |
| 12                                                                                | Allowable max. cond. Temp. at the time of short circuit (Temp. at which water blocking material shall remain stable)                 | Deg. C                                             | 250                                                                                                                                        |
| 13                                                                                | Short Circuit current rating for 1 Sec. duration                                                                                     | K.A.MPS                                            | 23.62                                                                                                                                      |
| 14                                                                                | Conductor DC Resistance at 20°C. ( Max.)                                                                                             | Ohms/Km                                            | 0.143                                                                                                                                      |
| 15                                                                                | Over all diameter (mm) (Approx)                                                                                                      |                                                    | 30                                                                                                                                         |
| 16                                                                                | Weight (Kg/Km)(Approx)                                                                                                               |                                                    | 1020                                                                                                                                       |
| 17                                                                                | Max load(IEC 61597), cond.temp 90 °C, air temp. 40 °C, wind speed 0.5 m/s, Solar radiation 1045W/m2 ,Approximate value (continuous): | Amp                                                | 495                                                                                                                                        |
| 18                                                                                | Marking detail (Embossing/printing)                                                                                                  |                                                    | HAVELLS 33 KV XLPE AAAC COVERED CONDUCTOR<br>(SIZE IN SQMM) - ( MFG . YEAR ), AS PER EN 50397-1 IN GENERAL                                 |
| 19                                                                                | SEQUENTIAL LENGTH MARKING                                                                                                            |                                                    | SHALL BE PROVIDED BY PRINTING AT EVERY MTR OF CABLE                                                                                        |
| 20                                                                                | Insulation Resistance (Volume resistivity)(Min)                                                                                      |                                                    |                                                                                                                                            |
|                                                                                   | at 27 Deg.C                                                                                                                          | Ohms - cm                                          | $1 \times 10^{14}$                                                                                                                         |
|                                                                                   | at 90 Deg. C                                                                                                                         | Ohms - cm                                          | $1 \times 10^{12}$                                                                                                                         |
| 21                                                                                | Lightning Impulse Withstand Voltage                                                                                                  | KV                                                 | 100                                                                                                                                        |
| 22                                                                                | Design Life                                                                                                                          |                                                    | We confirm use of cables for 25 years under Stipulated functional conditions & use of cables as per relevant IS: 1255 wherever applicable. |
| 23                                                                                | Packing material                                                                                                                     |                                                    | Non Returnable wooden drums                                                                                                                |

**Yours Faithfully,**

**For Havells India Ltd**

Angkit Boruah

Manager- Cables.

Email: Angkit.boruah@havelson.com

Phone no: 7002287818.

\* Values indicated as " Approx. " are for guidelines only

\* In case of any Typographical Error / Discrepancy , relevant standards shall be prevailed.




**HAVELLS**

## HAVELLS INDIA LTD. (CABLE DIVISION) - ALWAR

### CROSS-SECTIONAL DRAWING

120 mm<sup>2</sup>, 160 mm<sup>2</sup> & 241 mm<sup>2</sup> 33kV, AAAC COVERED CONDUCTOR

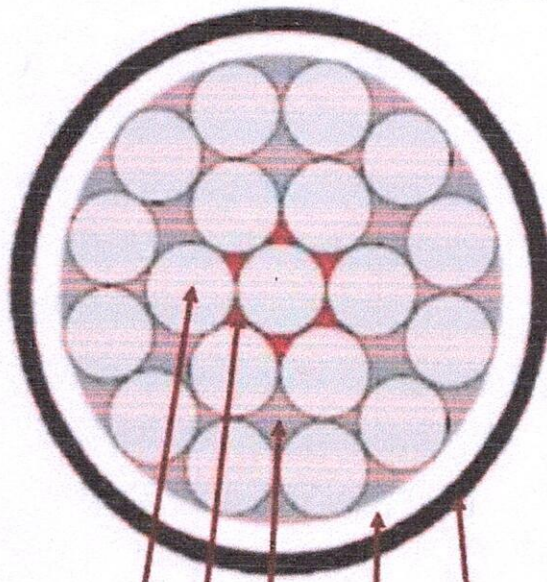

Aluminum Alloy Wires

Extruded Longitudinal water blocking layer

Extruded semi conductive layer

Covering (Insulation) of Track Resistant XLPE

(Track Resistant, Erosion resistant & UV Resistant)

Customer : APDCL

DWG NOT TO SCALE