




Diagonal Circuits

The RP2040 GPIO pins can support a max of 50mA TOTAL. RP2040 runs at 3.3v
Each pin should not draw more than 16mA
 $3.3/0.016 = 206$
Let's go higher and say 220R

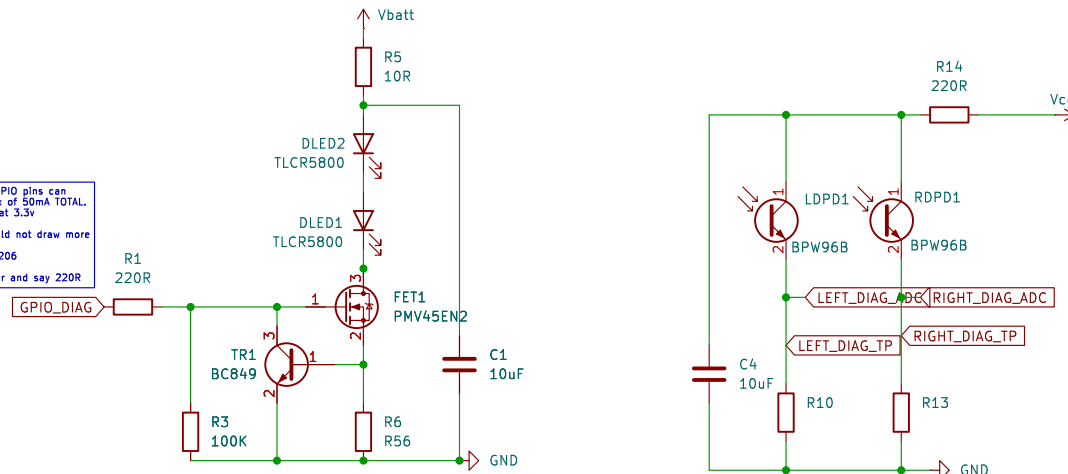




Front Circuits

The RP2040 GPIO pins can support a max of 50mA TOTAL. RP2040 runs at 3.3v
Each pin should not draw more than 16mA
 $3.3/0.016 = 206$
Let's go higher and say 220R

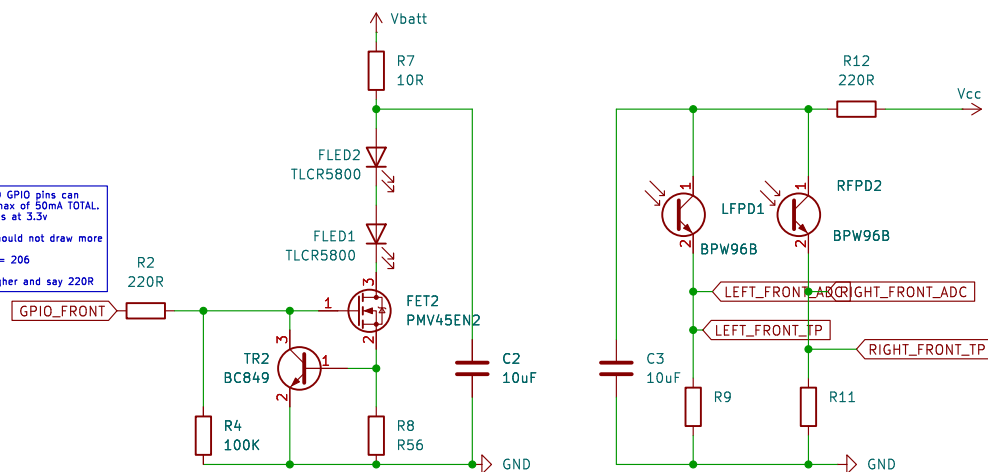

GND ← 1 GROUND1 GROUND

GND ← 1 GROUND2 GROUND



Redesign of the UKMARS Advanced board to use SMD and Duncan's design

Sheet: /
File: SSWallSensorBoard.kicad_sch

Title: Sepent Scamper Sensor Board

Size: A4 Date: 2025-04-07

KiCad E.D.A. 8.0.8

Rev: 2.0

Id: 1/1