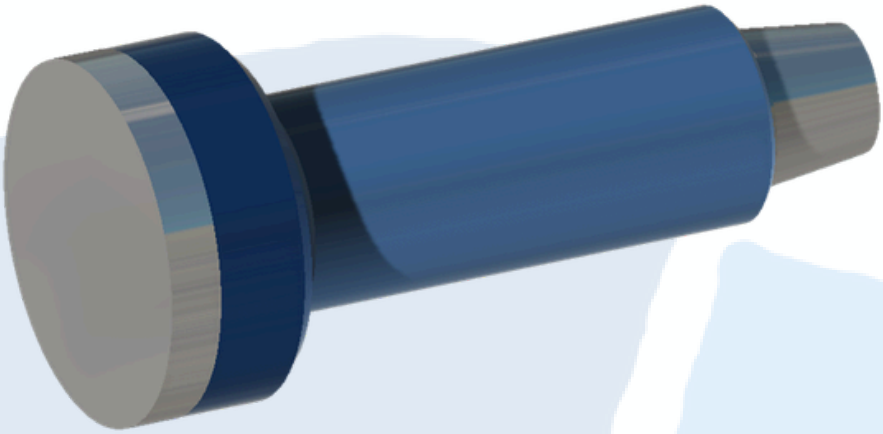


IMPRESSION BLOCK

CLEAN OUT

GENERAL DESCRIPTION

Impression Blocks are made from a low alloy steel outer casing, with either a lead or tar inner filling, depending on the circumstances in which the impression is taken.

Lead is ideal for deeper, higher temperature conditions while tar is very good for large OD, shallow applications.

Any size impression block can be built to order.

SPECIFICATIONS

Top Connection	2-3/8 API REG	2-7/8 API REG	3-1/2 API REG
Tool OD	4	5	6
Material used	Lead	Lead	Lead
Top Connection	4-1/2 API REG	6-5/8 API REG	7-5/8 API REG
Tool OD	8-1/2	12-1/4	17-1/2 - 26”
Material used	Lead	Lead	Tar