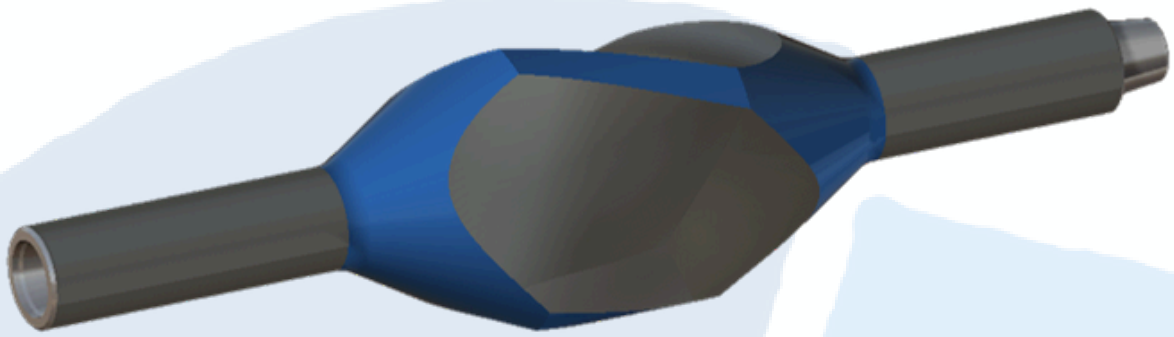


STABILIZERS NEAR BITS

GENERAL DESCRIPTION

The Integral Blade Stabilizer stabilizes the BHA maintaining the drillstring in the centre of the hole and avoids vibrations. It is manufactured from high-strenght alloy steel as a single piece tool. Its construction features three spiralled ribs designed to minimize downhole torque, reduce damage to the hole wall and ensure a maximum fluid circulation.

It is particularly suitable for use in hard and abrasive formations.


Stabilizers are available with pin and box connection (String Type) or with two boxes connections (Near Bit Type).

This last configuration is usually placed just above the bit and can receipt a float valve.

SPECIFICATIONS

Hole size	6 - 6-3/4	7-5/8 - 8-1/2	9-5/8 - 12-1/4	14-3/4 - 17-1/2	20 - 26
Std. DC Size	4-1/2 - 4-3/4	6-1/2	8	9-1/2	9-1/2
Blade diameters	1/32 under size	1/32 under size	1/32 under size	1/16 under size	1/16 under size

HARDFACING COMPARISON

Hardfacing type	Hardness (HRC)	Wear resistance	Impact resistance
	60-65	★★★★★	★★★☆☆
	55-60	★★★★☆	★★★★☆
	60-64	★★★★★	★★★★☆

