


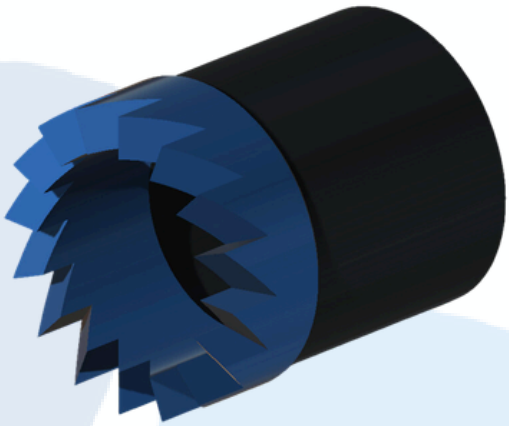


WASHOVER SHOE

MILLING

The Washover Shoes are designed in various sizes and styles to meet the many conditions encountered in oil well fishing and washover operations. Located at the bottom of the washover string, Washover Shoe is used to cut a clearance between the fish and the wall of the well bore during retrieval operations or to release stuck downhole objects. Washover Shoe can be dressed with carbide Inserts for hard milling and for best work duration.

Washover Extensions, Washover Pipes, and Top Subs are available according to the connection size of the washover string desired. Appropriate washover lifting equipment are also available.

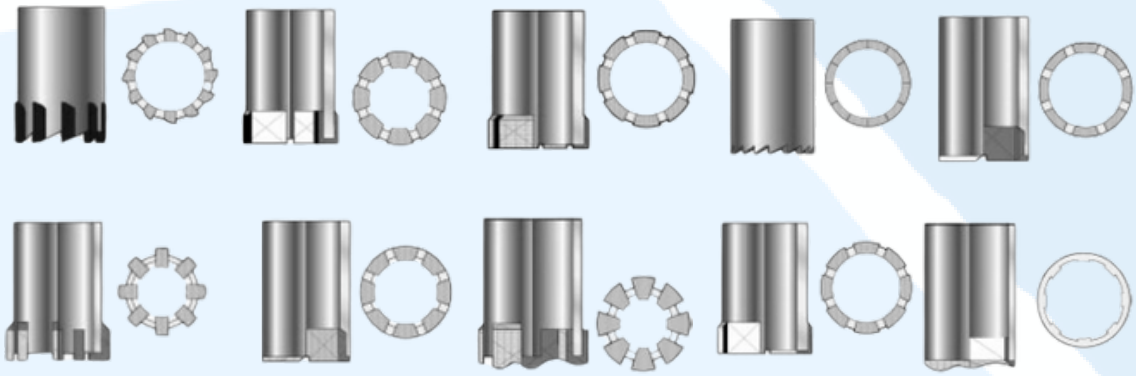

MAIN APPLICATIONS

- Recovering stuck drill pipe, tubing, or casing.
- Clearing wellbore restrictions caused by collapsed formations or debris.
- Assisting fishing operations by providing a clean passage around stuck equipment.

TECHNICAL FEATURES

- Cutting edge designed for efficient material removal.
- Available in multiple sizes to match casing and tubing diameters.
- Hard-faced or carbide-enhanced surfaces for durability and cutting efficiency.
- Optimized fluid ports to maintain circulation and aid in debris removal.
- Compatible with various thread connections for seamless integration into the fishing string.