
SOFA BED


ASSEMBLY INSTRUCTIONS
MODEL NO.:RYS213 / RYS214

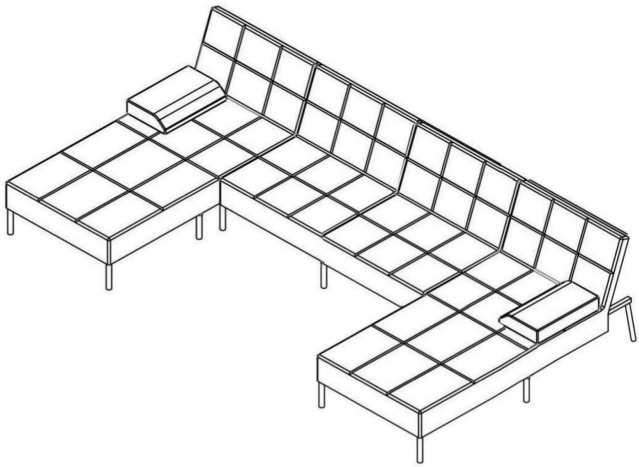


INSTALLATION VIDEO


Please scan QR code with iPhone or Android phone camera, click the link to play the installation video.
If QR code is damaged, contact us for the video.
If no access for cell phone scanner, please try other APP.


213/214 installation video

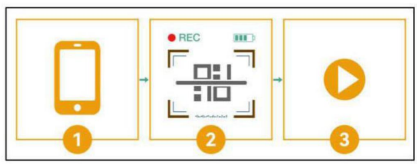


CAUTION:
– Please do not open the compress packaging until your sofa frame iscompletely assembled.
– Compress cushions or pillows need to fully fluffed within 72 hours foryour perfect use.
– Please keep children away from plastic bag or any small pieces of stuff
– After assembly is completed, don't forget to pat the back cushions and seat cushions, make them recovering better. And wait 72 hours for fully rebound
– Cushions should be regularly maintained for perfect use.
– 2 people to instal is recommend
– 2 people to lift the sofa if you want to move it, do not push or pull directly
– You can assemble it with out packaging tools or home electric drill, as shown below, Electric Drill tool is not included.
Electric drill will improve your assembling efficiency.
You can use it if you have this tool, DO NOT overtight to prevent from damaging screws and slats/boards.









Components:

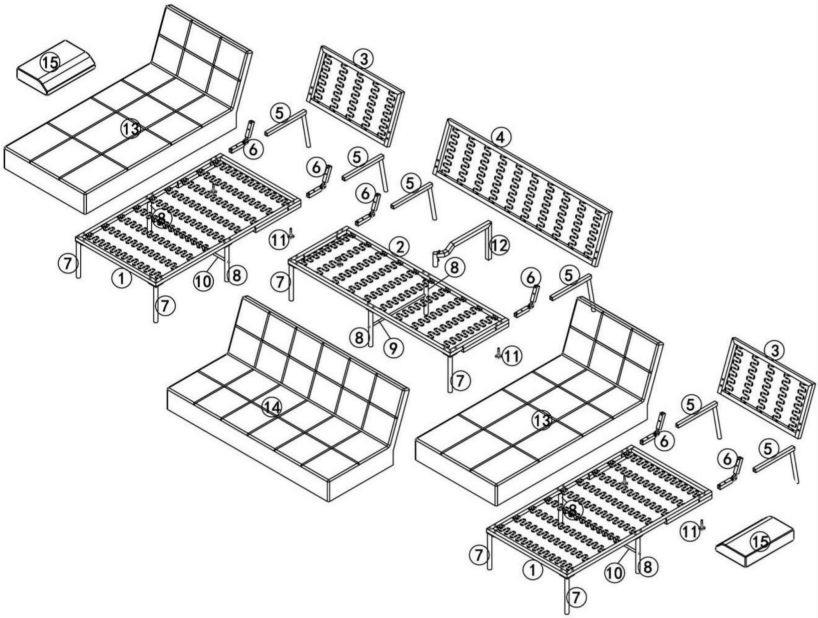


PARTS LIST:




① x2



② x1



③ x2



④ x1



⑤ x6



⑥ x6



⑦ x6



⑧ x6



⑨ x1



⑩ x2




M8*20 ⑪ x7



⑫ x1



⑬ x2



⑭ x1




⑮ x2


HARDWARE LIST:

A M8*35 30PCS	B M6*15 24PCS	C M8*45 4PCS		
D M6*40 6PCS	E S4 1PCS	F S5 1PCS	M5*60mm 1pc	M4*60mm 1pc


Step 1:
- Assemble the leg (7) by bolts "A" and wrench "F".
- Connect the metal tube (10) to middle legs (8) by bolts "A", and then assemble the leg (8) to seat frame.
- Insert the hings (6) with arrow side to the upper tube of seat frame (1) and tighten with bolts "B" and wrench "E".
- Insert the back leg (5) to the seat frame (1), then screw "11" from bottom.

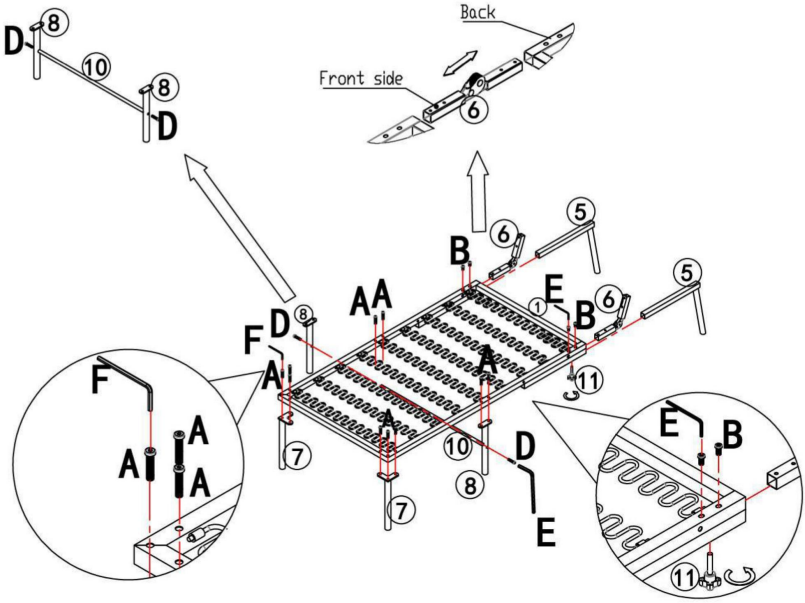


Step 2: Insert the back frame (3) to seat frame (1), and tighten with bolts "B" and wrench "E".

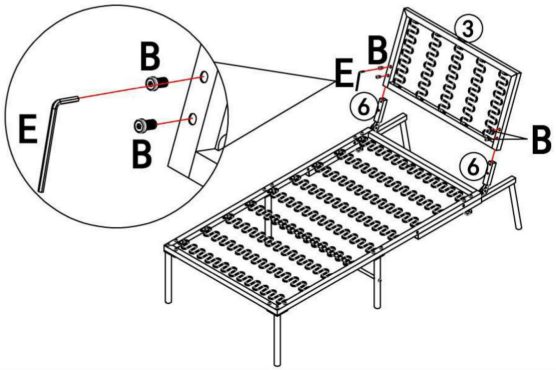


Step 3: – Install the middble legs (8)& (12).

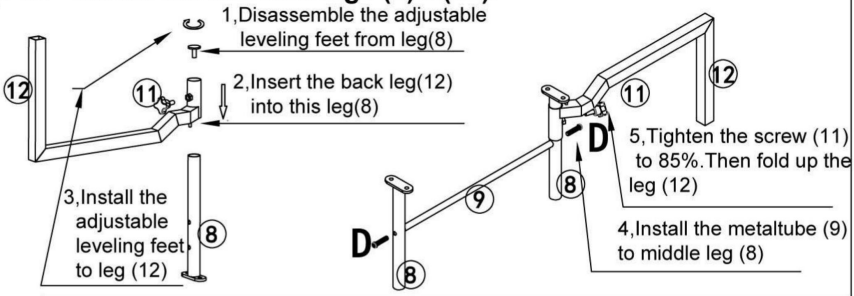


- Assemble the leg (7) by bolts "A" and wrench "F".
- Assemble the middle leg (8) to seat frame.
- Insert the hings (6) with arrow side to the upper tube of seat frame (2) and tighten with bolts "B" and wrench "E".
- Insert the back leg (5) to the seat frame (2), then screw "11" from bottom.

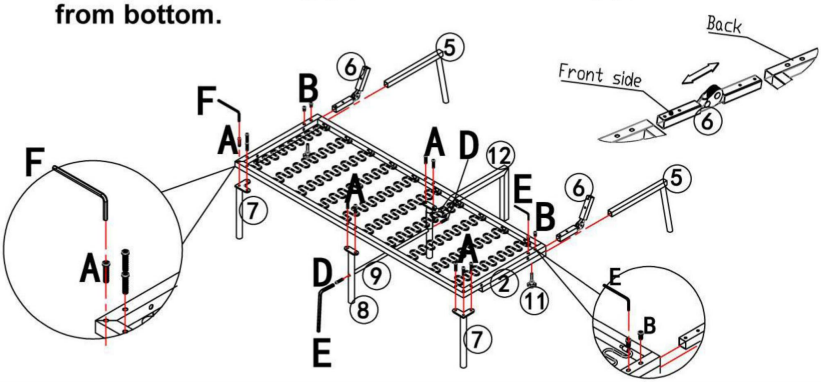


Step 4: Insert the back frame (4) to seat frame (2), and tighten with bolts "B" and wrench "E".

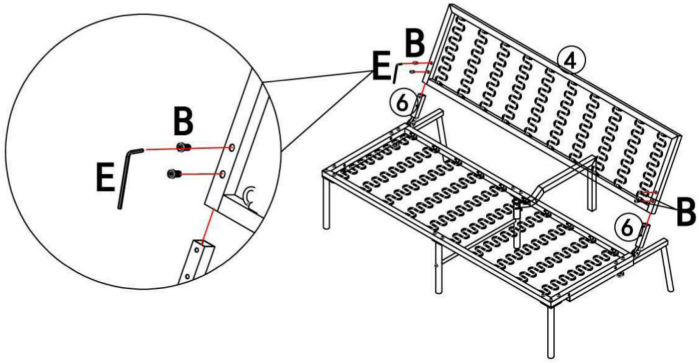


Step 5: Cover on the metal back frame, and put the seat cushion flat, then tie it up to metal frame.

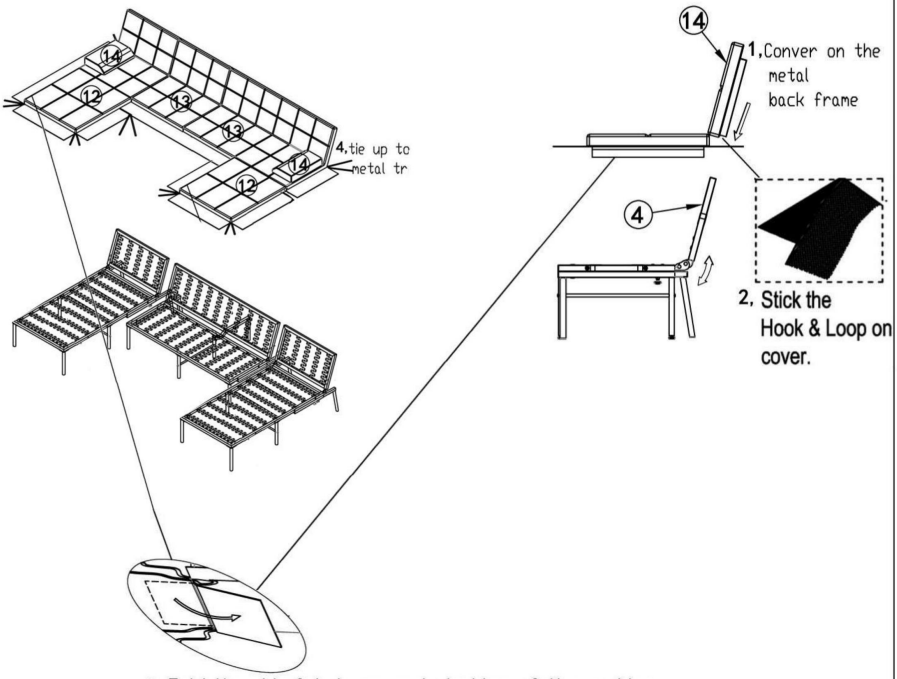

Step 6: connect the sofa & chaise by bolts "C" and wrench "F".

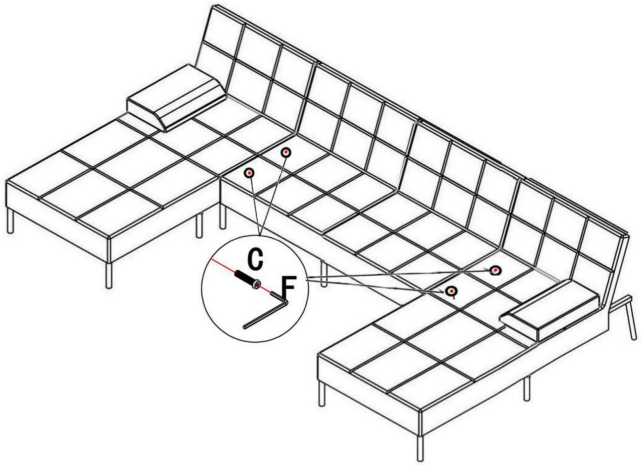

Step 7: Assembly is complete.
Convert the sofa bed as per following steps:

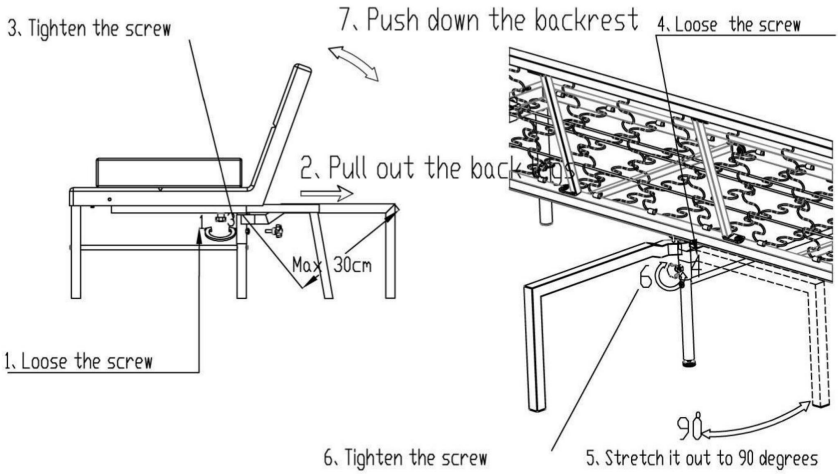

The back has 5 angles for adjustable.
The back must be adjusted more than 90° to lie flat.

