MARINA MOORING LINES

Policy Title:	Marina Mooring Lines
Current Issue Number:	2.3
Approved By & Date:	Harbour Berthing Committee 19/01/2026
Date of Review:	12/01/26
Location of Document	SharePoint Risk and Assurance – Policies Formatted & Approved

Policy

All Vessels shall be moored as directed by the Harbour Berthing Committee.

Procedure

1. The Club is responsible for the fixtures up to and including the jetty and pylon eyebolts. The Pen Occupier is responsible for notifying the Harbour Berthing Committee of unacceptable wear to the jetty or pylon eyebolt rings or the first large shackle (if provided by the Club).

2. The Pen Occupier is responsible for the installation, maintenance and suitability of their mooring gear and mooring arrangement.

3. The following table specifies the sizes and materials for mooring gear that shall be fitted as a minimum:

Overall length of vessel	Minimum diameter of mooring lines (Polypropylene)	Drop chain link & shackle diameter (Galvanised)	Pen weight (plastic coated concrete)
Up to 6 m	12 mm	12 mm	20 Kg
6 to 10 m	16 mm	12 mm	20 Kg
10 to 14m	20 mm	16 mm	30 Kg
More than 14m	24 mm	20 mm	30 Kg

Please note that if a boat is stored on a dry berth or air berth of any sort, then the specifications for the 10 to 14m size range shall apply.

4. Stainless steel shackles shall not be used for attachment to the jetty or pylon eyebolt rings or the first large shackle, if provided.

5. Bow, stern and springer lines shall:
   - have an eye spliced in the vessel end;
   - have an eye spliced with a metal galvanised thimble at the chain end;
   - be attached with a shackle to the chain;
   - not use knots for attachment; and
   - floating brick docks may be attached at the brick end with a sliced eye, including a round-turn through the brick connector.

6. Where possible, the mooring weights should in the water. For pens with high-level eye bolts, the weights may be out of the water and may require retaining straps.

7. Rubber mooring snubbers / compensators may be used in addition to, but not in place of pen weights.

8. Mooring lines are to be of suitable length and tension to retain the vessel in the pen at all levels of the tide.

9. Springer lines are to be used to retain the vessel from colliding with the jetty, pylons or other adjacent vessels. It is recognised that some arrangements do not need Springer Lines.

10. Zero-stretch ropes such as Kevlar, Dyneema and Spectre shall not be used for mooring gear.

11. The following shall not be done without the permission of the Harbour Berthing Committee:
    - attaching materials or fittings to pylons or jetty. For the new type of mooring pylons with plastic coatings, the coatings must not be damaged or pierced by any attachments, as the plastic coating is the corrosion protection for the pylon;
    - attaching or cantilevering access steps from the jetty;
    - the installation of 'floating brick docks', as this requires specific installation requirements to be considered for most pens. Where possible, the floating brick docks should be connected and integrated with any adjacent floating dock systems. These are not permitted for vessels larger than 8m in length or more than 2500kg total weight; and
    - the installation of 'air ballasted floating docks', as this requires specific installation requirements to be considered for most pens. No apparatus associated with the docking system is permitted on the jetty.

12. Mooring gear or arrangements that are considered unsafe may be required to be refitted at the direction of the Harbour Berthing Committee.

13. A typical arrangement of mooring lines is shown in Figures 1 & 2. It is recognised that variations to the typical arrangement may be required for the differing boats and conditions in various parts of the marina. Should the Pen Occupier wish to install a different arrangement, then permission of the Harbour Berthing Committee should be sought.

Figure 1 – Typical Mooring Detail

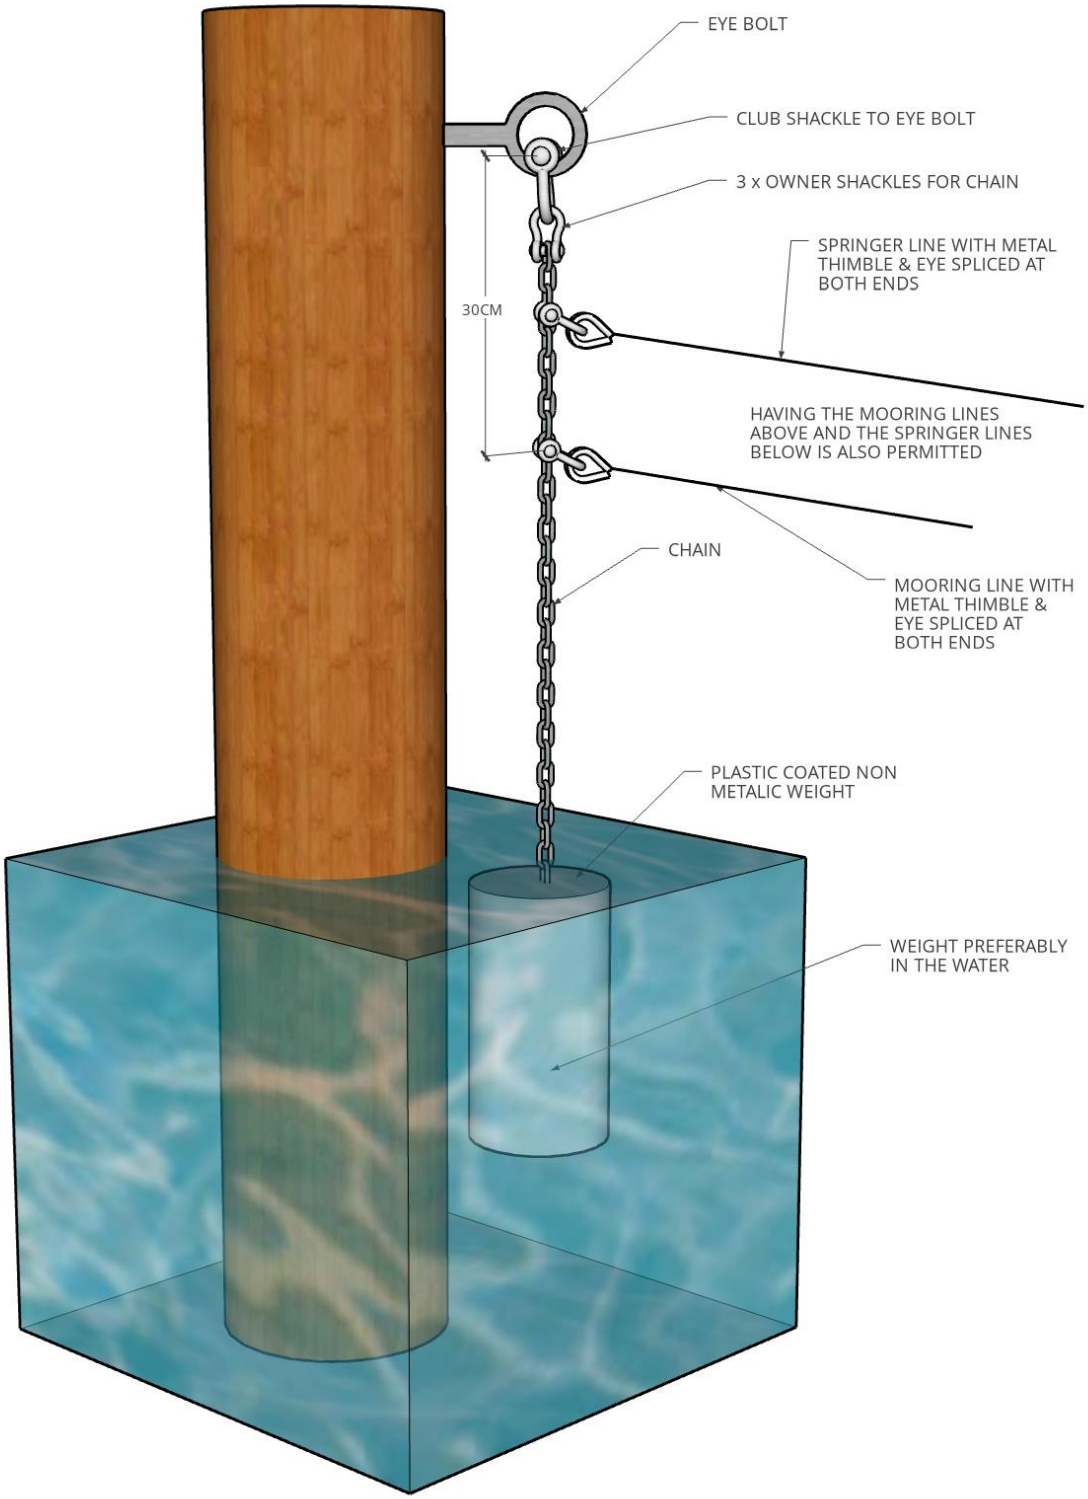

Figure 2 – Typical Mooring Arrangement

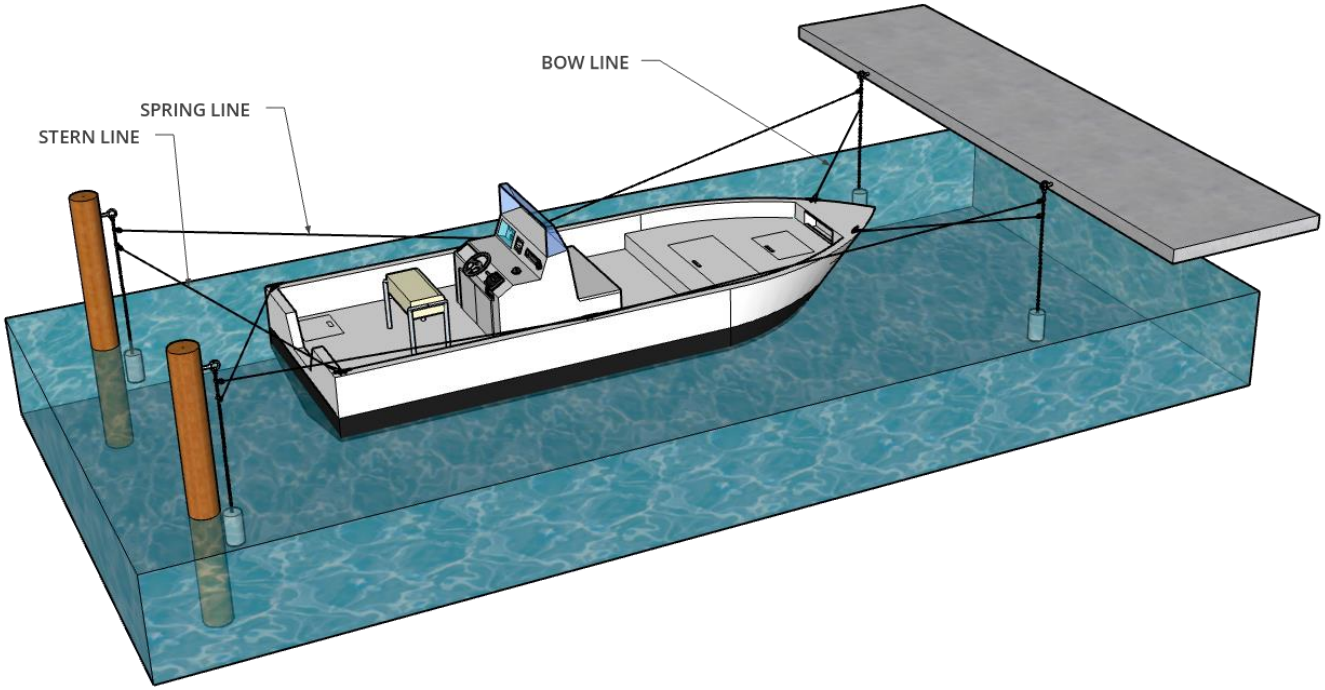

Pillar:		Responsible Manager:
Facilities		Bosun
Risk Rating:	Review Cycle:	Review Next Due:
Compliance References:		
Statutory:		
Australian Sailing:		
RFBYC:	By-Law 1.4, 1.5	
Version:	Decision Reference:	Synopsis:
1.05	01/02/2022	
2.0	JDStandley 26/6/23	Contents reviewed
2.1	BDJones 23/8/23	Formatted for new risk management portfolio
2.2	Neil Clegg	Specifications for dry docks. No attachments to mooring pylons
2.3	Neil Clegg	Clarification of mooring weights being in the water when suitable and upgrade of weight quantum