




Implementing VLANs and Trunks


Issues in a Poorly Designed Network

- **Unbounded failure domains**
- **Large broadcast domains**
- **Large amount of unknown MAC unicast traffic**
- **Unbounded multicast traffic**
- **Management and support challenges**
- **Possible security vulnerabilities**

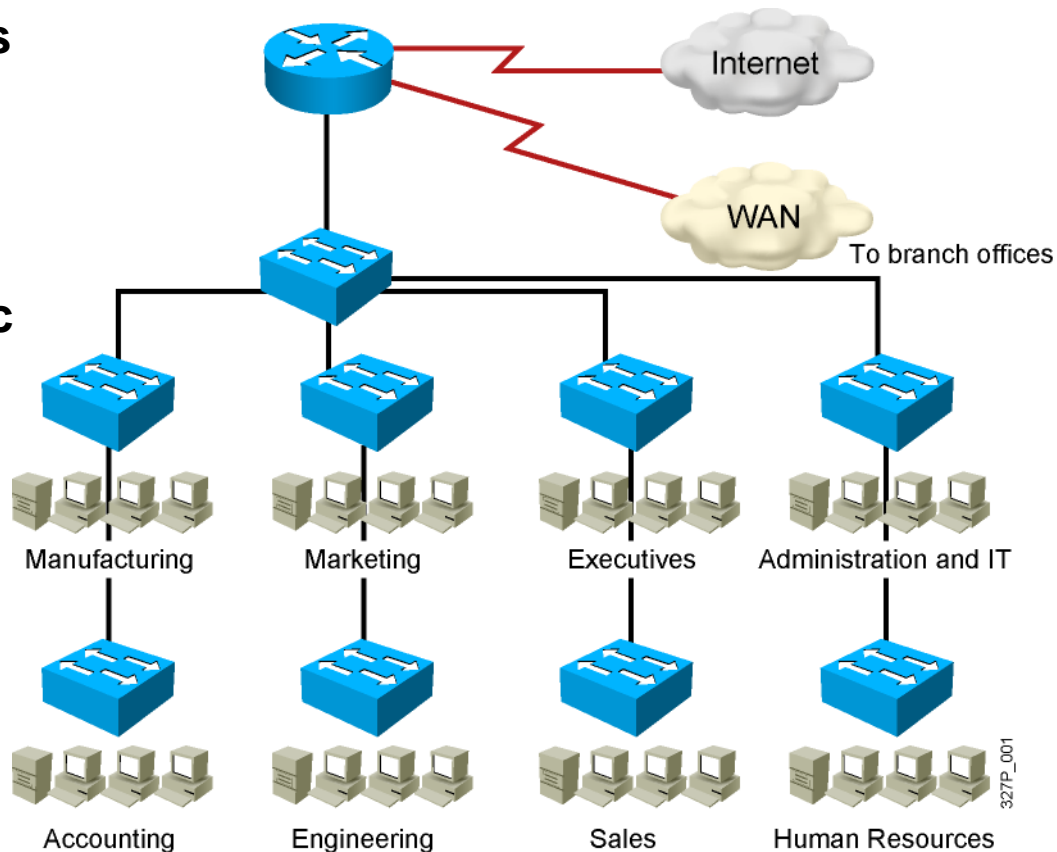

VLAN Overview

- Segmentation
- Flexibility
- Security

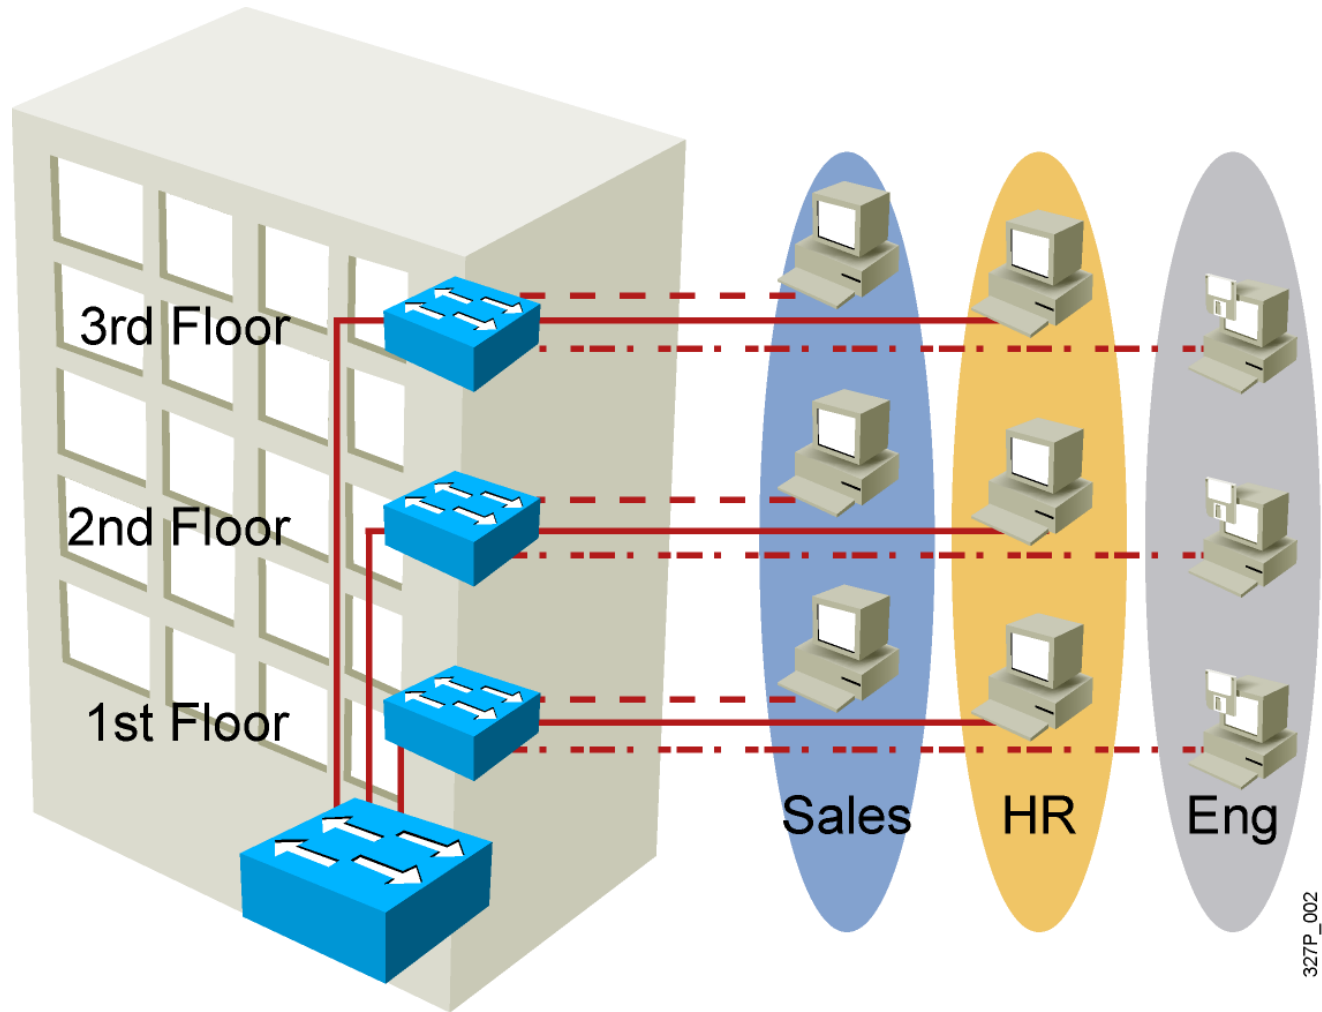


VLAN = Broadcast Domain = Logical Network (Subnet)

Designing VLANs for an Organization

- **VLAN design must take into consideration the implementation of a hierarchical network addressing scheme.**
- **The benefits of hierarchical addressing are:**
 - **Ease of management and troubleshooting**
 - **Minimization of errors**
 - **Reduced number of routing table entries**

Guidelines for Applying IP Address Space

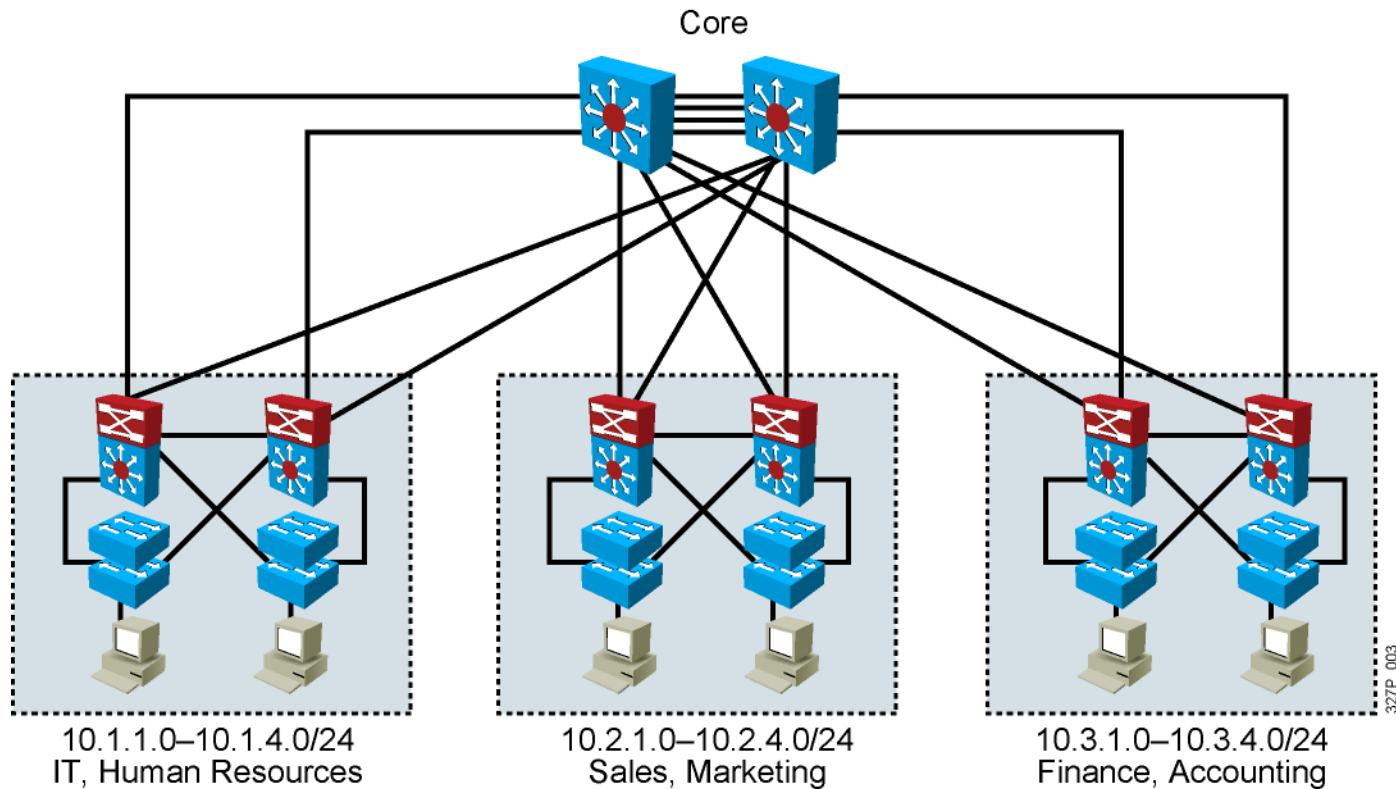


- **Allocate one IP subnet per VLAN.**
- **Allocate IP address spaces in contiguous blocks.**


Network Traffic Types

Traffic types to consider when designating VLANs:


- Network management
- IP telephony
- IP Multicast
- Normal data
- Scavenger class

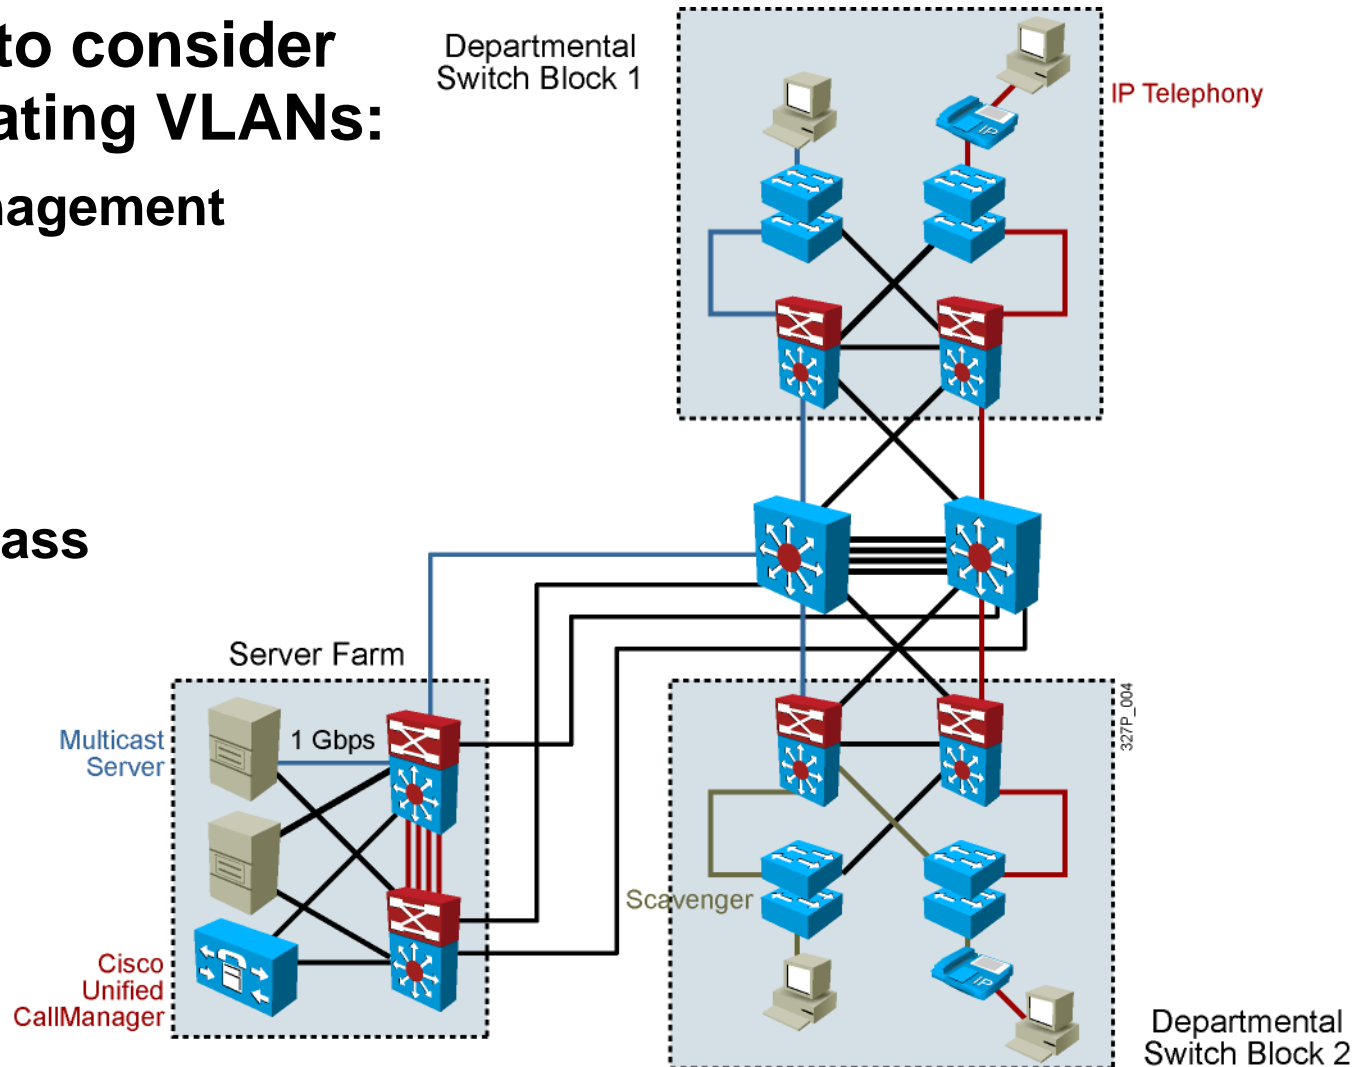


802.1Q Trunking

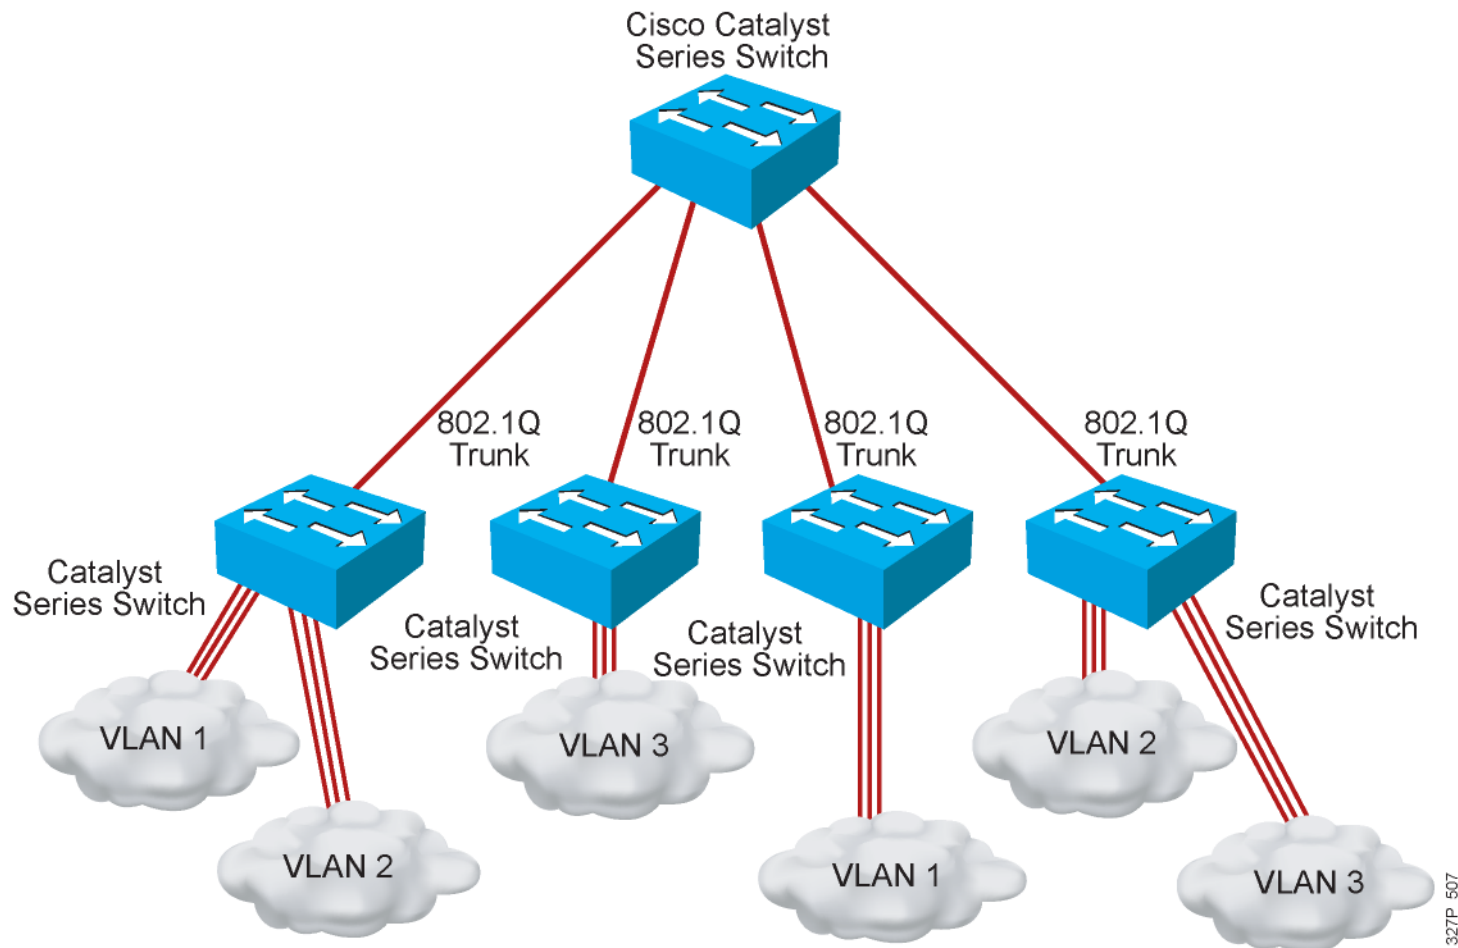


802.1Q Frame

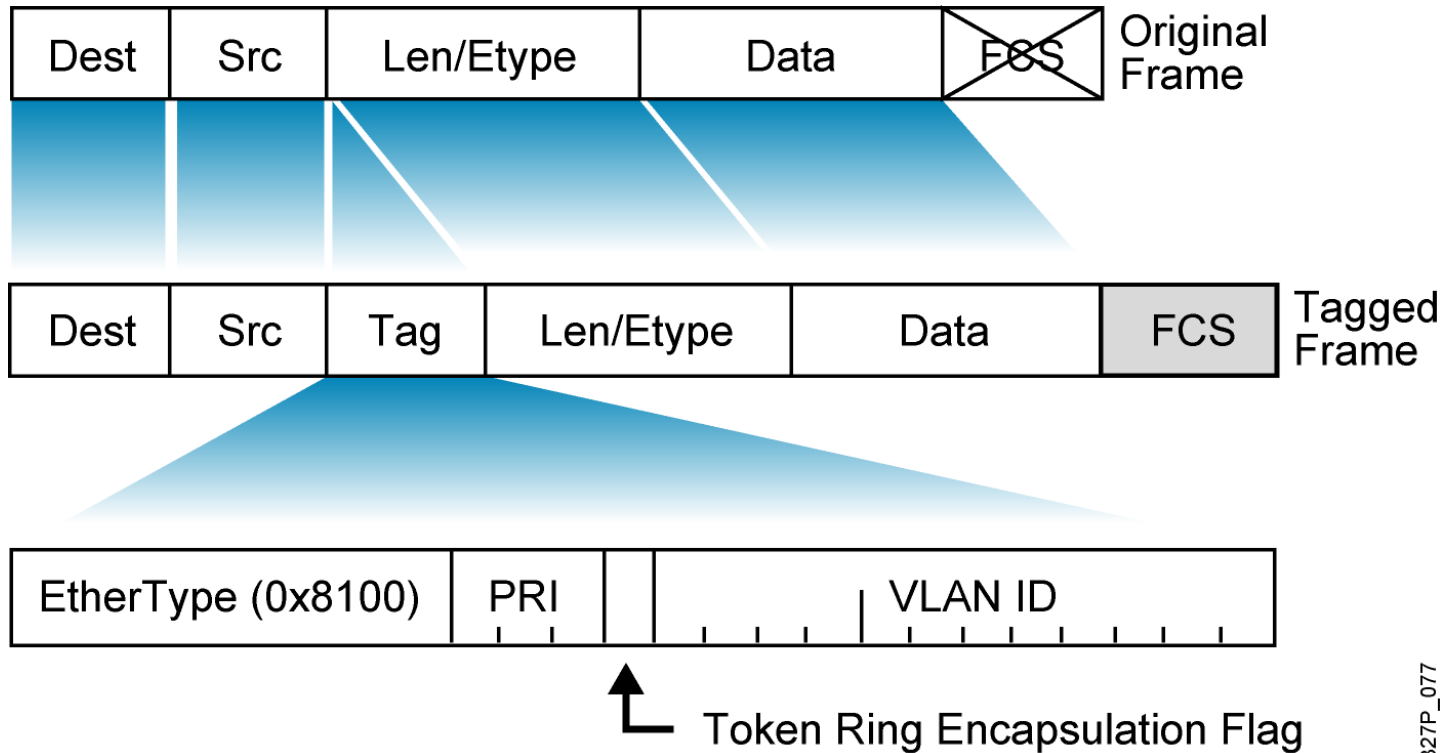

ISL Encapsulation

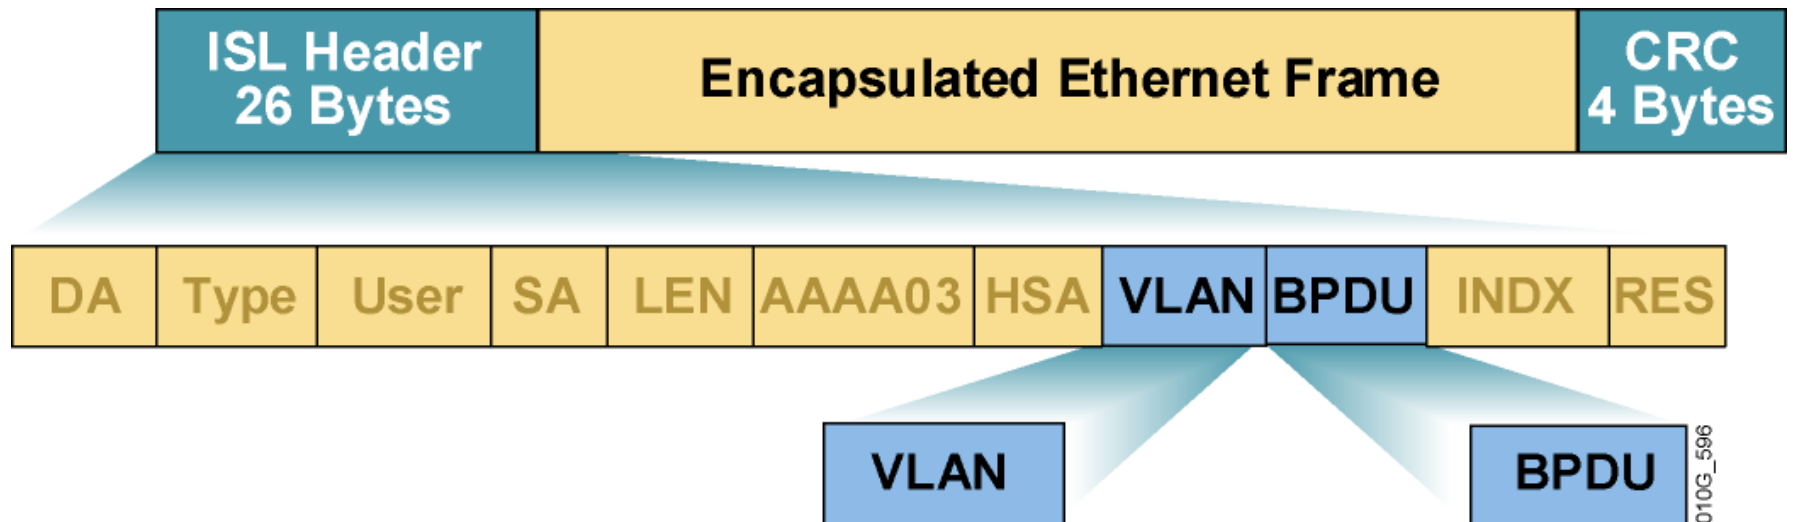

Understanding Native VLANs

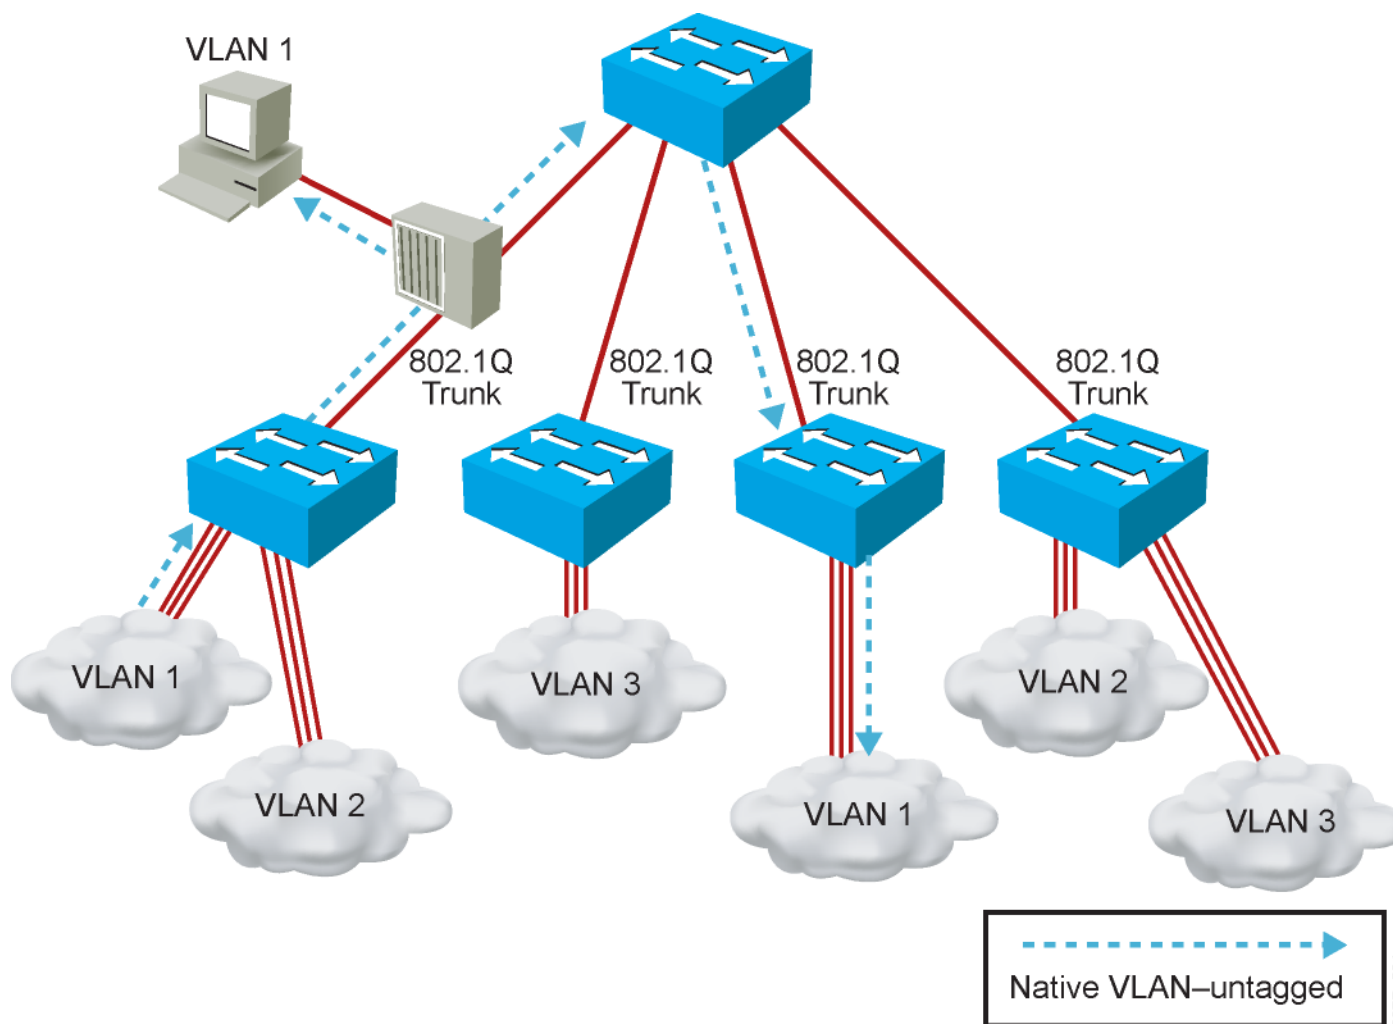


VTP Features

VTP Domain
CISCO

VTP Server


1. VLAN added/deleted

2. Change propagated

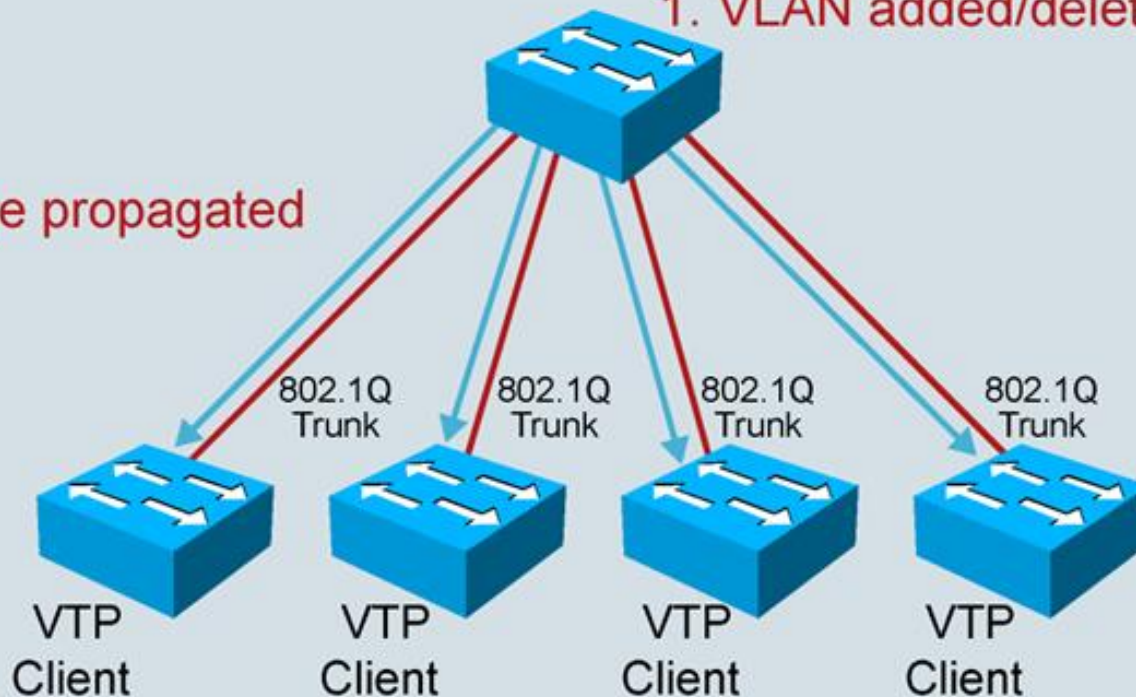


3. Synch to latest change

VTP Modes

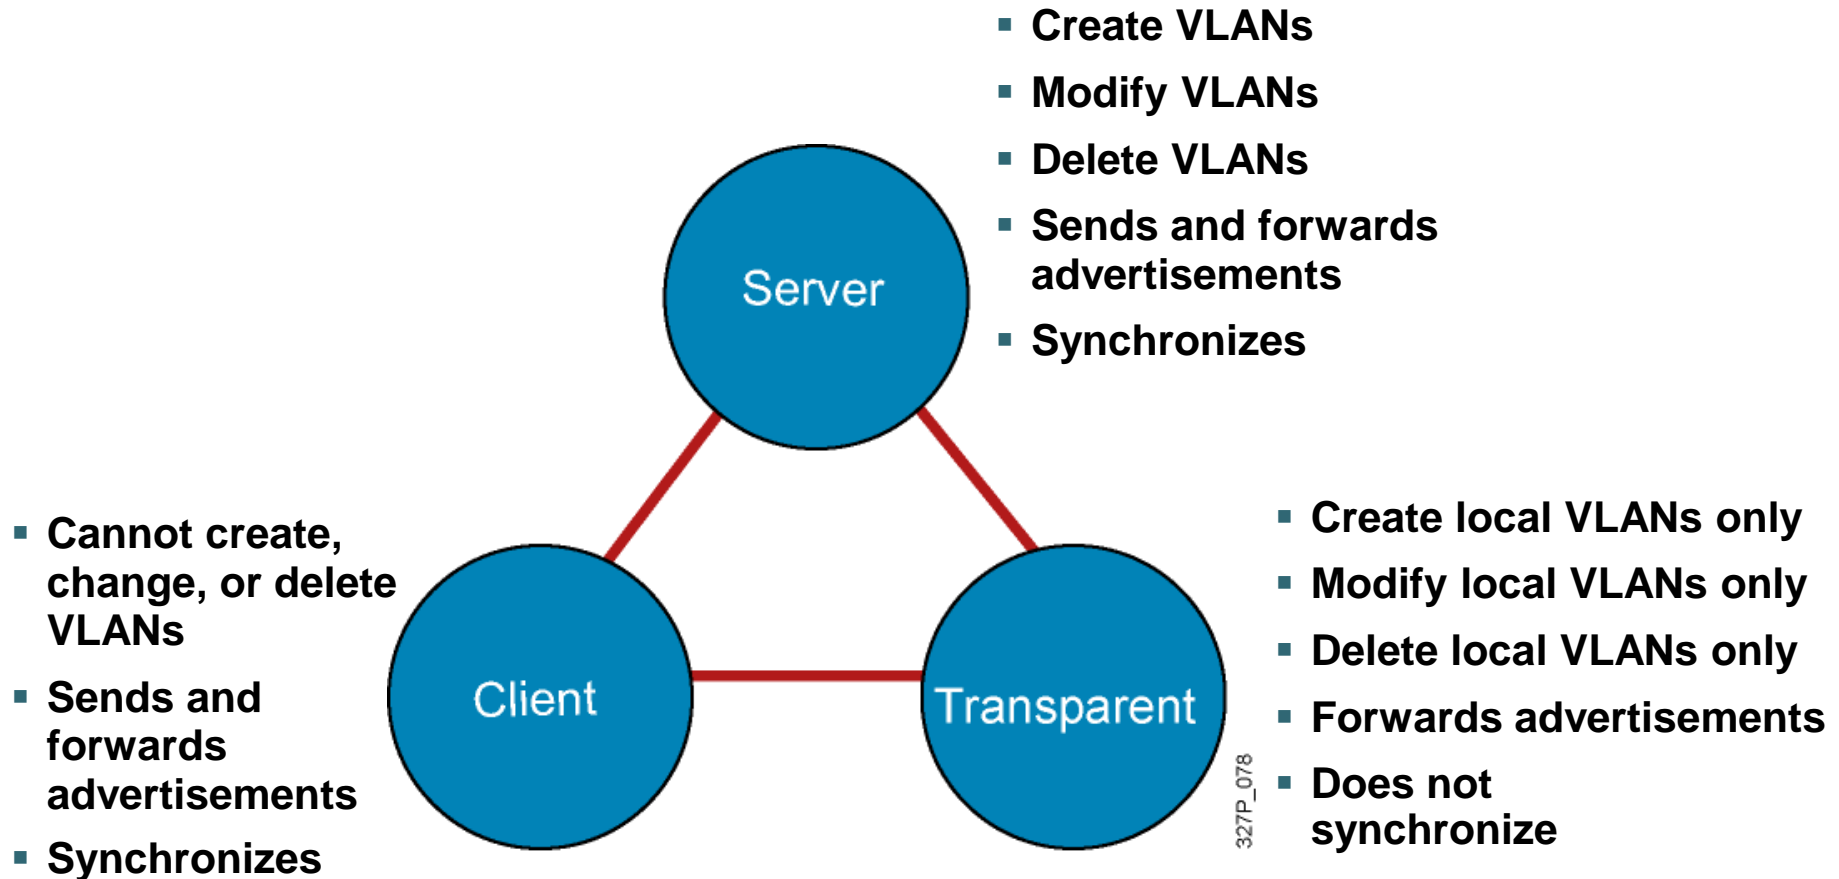


VTP Operation

- VTP advertisements are sent as multicast frames.
- VTP servers and clients are synchronized to the latest revision number.
- VTP advertisements are sent every 5 minutes or when there is a change.

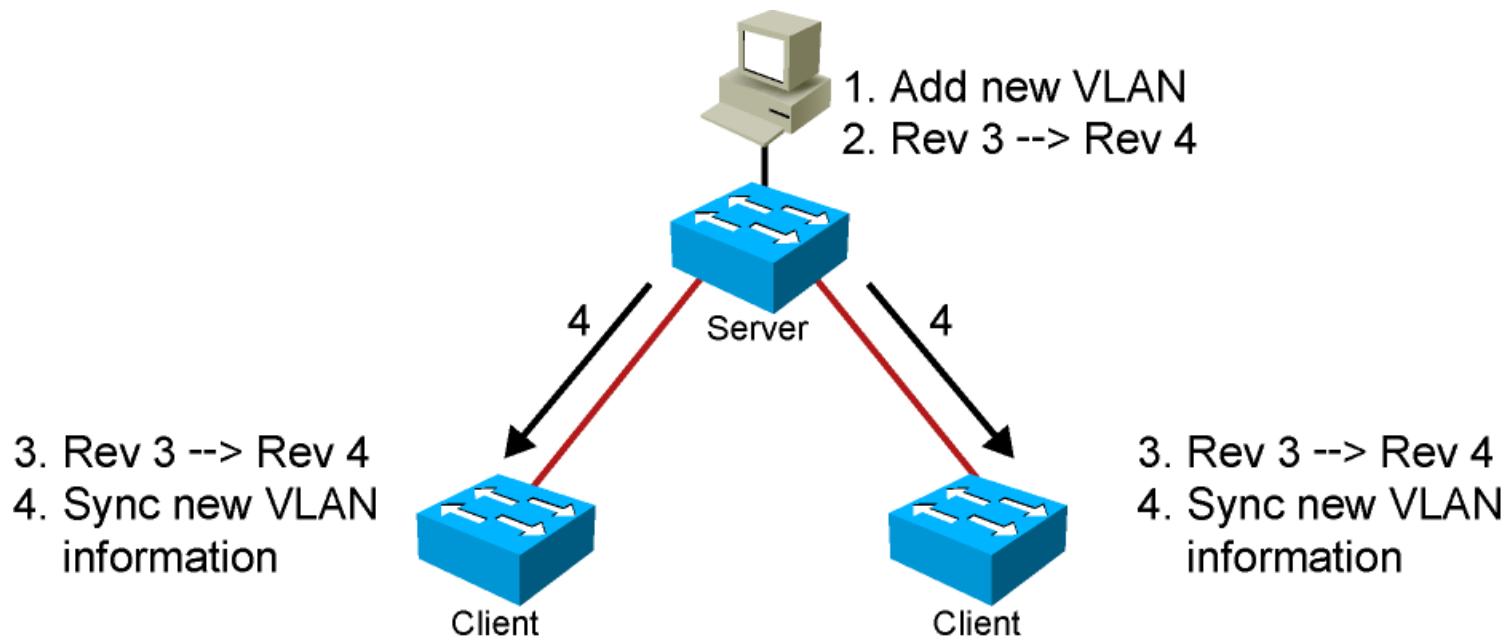

VTP Pruning

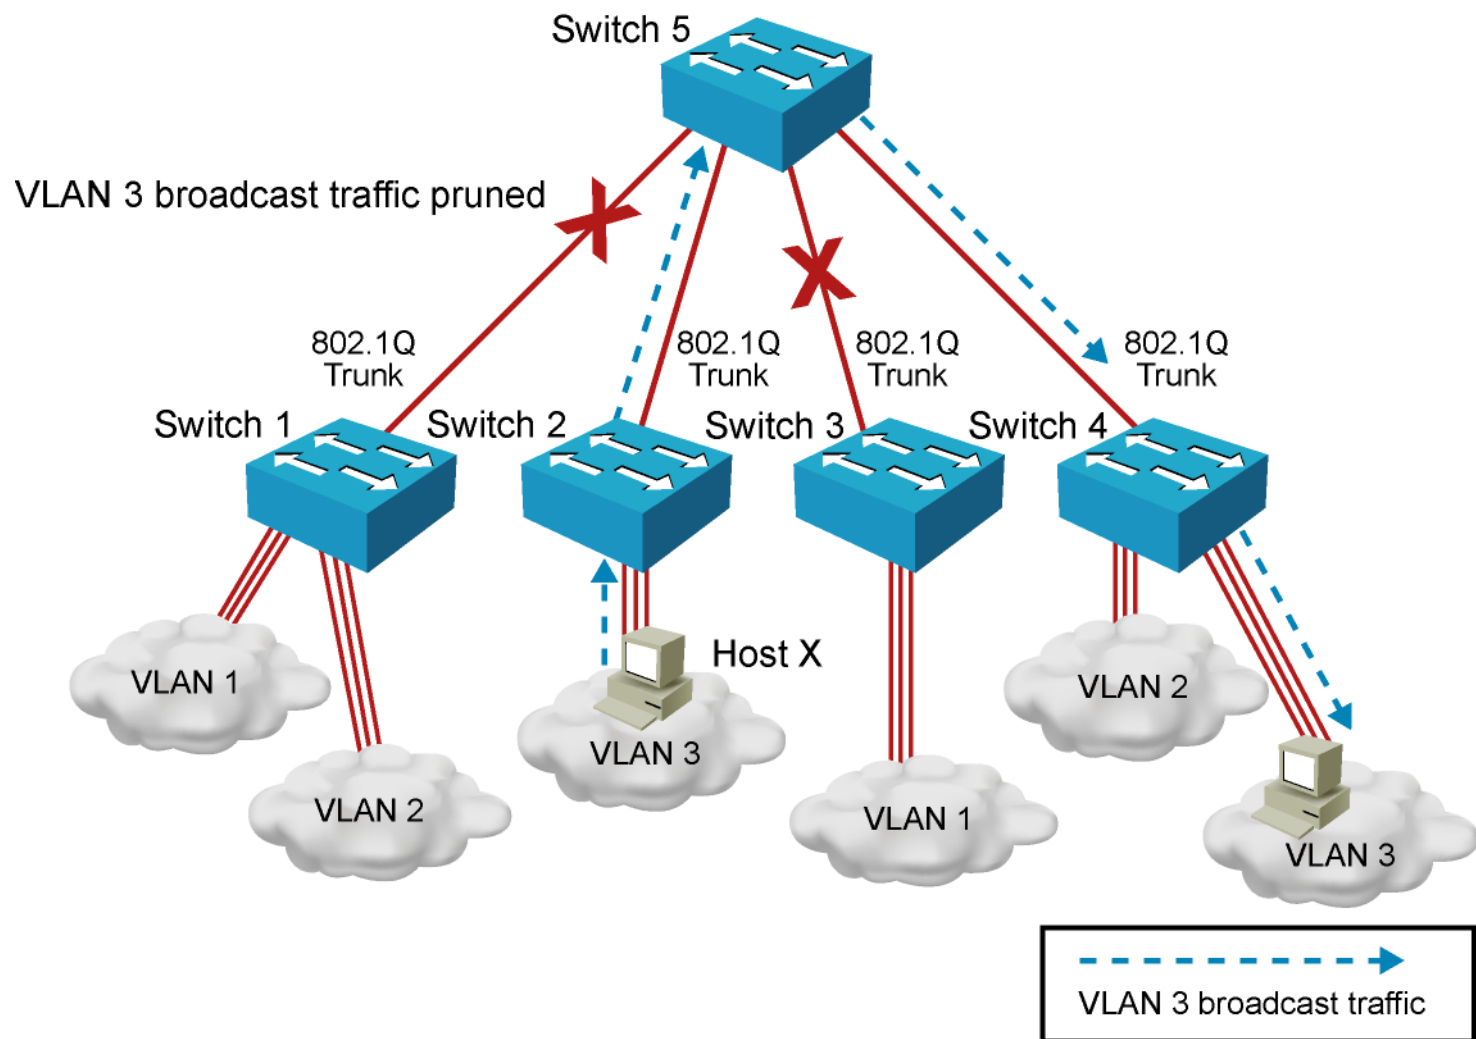

Configuring VLANs and Trunks

- 1. Configure and verify VTP.**
- 2. Configure and verify 802.1Q trunks.**
- 3. Create or modify a VLAN on the VTP server switch.**
- 4. Assign switch ports to a VLAN and verify.**
- 5. Execute adds, moves, and changes.**
- 6. Save the VLAN configuration.**

VTP Configuration Guidelines

- **VTP defaults for the Cisco Catalyst switch:**
 - **VTP domain name: None**
 - **VTP mode: Server mode**
 - **VTP pruning: Enabled or disabled (model specific)**
 - **VTP password: Null**
 - **VTP version: Version 1**
- **A new switch can automatically become part of a domain once it receives an advertisement from a server.**
- **A VTP client can overwrite a VTP server database if the client has a higher revision number.**
- **A domain name cannot be removed after it is assigned; it can only be reassigned.**

Creating a VTP Domain

```
SwitchX# configure terminal
SwitchX(config)# vtp mode [ server | client | transparent ]
SwitchX(config)# vtp domain domain-name
SwitchX(config)# vtp password password
SwitchX(config)# vtp pruning
SwitchX(config)# end
```


VTP Configuration and Verification Example

```
SwitchX(config)# vtp domain CISCO
Changing VTP domain name to CISCO
SwitchX(config)# vtp mode transparent
Setting device to VTP TRANSPARENT mode.
SwitchX(config)# end
```

```
SwitchX# show vtp status
```

```
VTP Version : 2
Configuration Revision : 0
Maximum VLANs supported locally : 64
Number of existing VLANs : 17
VTP Operating Mode : Transparent
VTP Domain Name : CISCO
VTP Pruning Mode : Disabled
VTP V2 Mode : Disabled
VTP Traps Generation : Disabled
MD5 digest : 0x7D 0x6E 0x5E 0x3D 0xAF 0xA0 0x2F 0xAA
Configuration last modified by 10.1.1.4 at 3-3-93 20:08:05
SwitchX#
```

802.1Q Trunking Issues

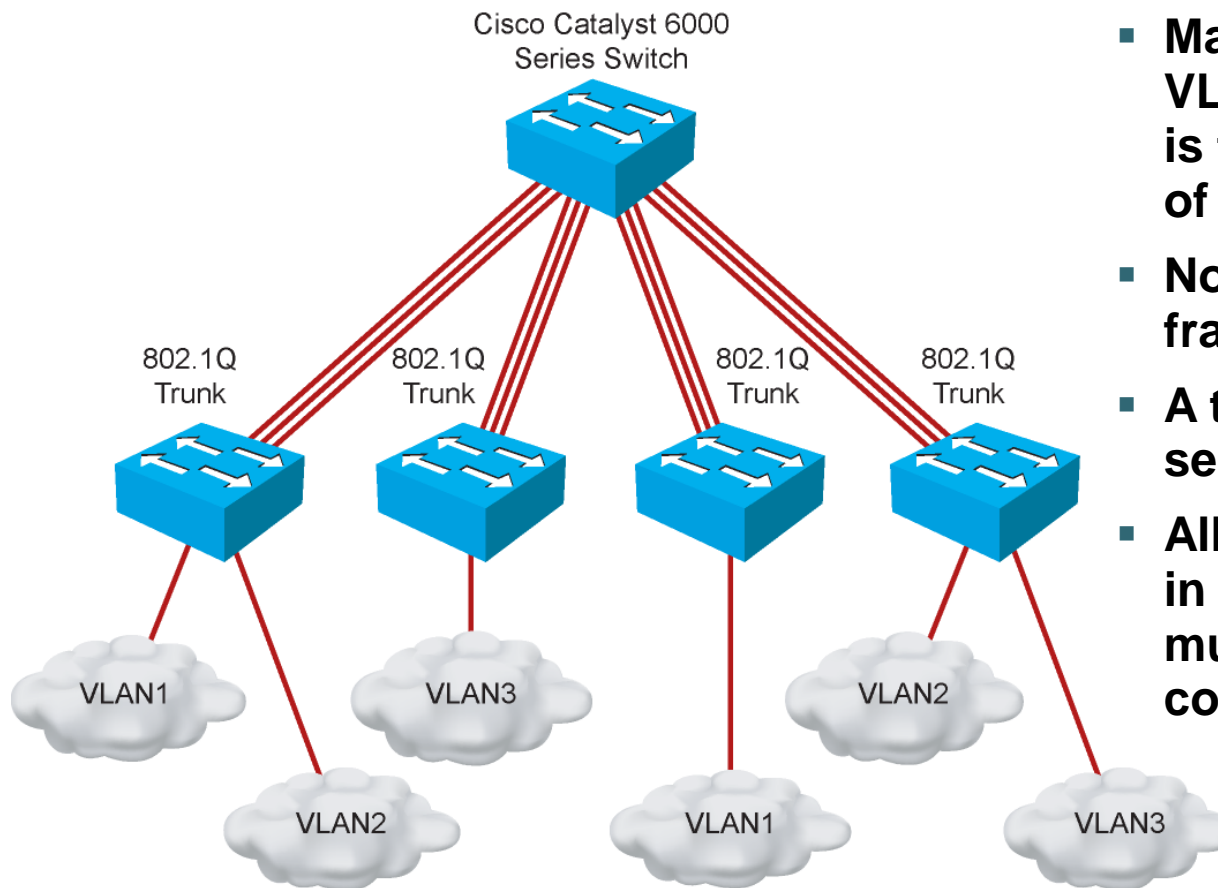

- Make sure that the native VLAN for an 802.1Q trunk is the same on both ends of the trunk link.
- Note that native VLAN frames are untagged.
- A trunk port cannot be a secure port.
- All 802.1Q trunking ports in an EtherChannel group must have the same configuration.

Configuring 802.1Q Trunking

SwitchX(config-if) #

```
switchport mode {access | dynamic {auto | desirable} | trunk}
```

- Configures the trunking characteristics of the port

SwitchX(config-if) #

```
switchport mode trunk
```

- Configures the port as a VLAN trunk

Verifying a Trunk

```
SwitchX# show interfaces interface [switchport | trunk]
```

```
SwitchX# show interfaces fa0/11 switchport
Name: Fa0/11
Switchport: Enabled
Administrative Mode: trunk
Operational Mode: down
Administrative Trunking Encapsulation: dot1q
Negotiation of Trunking: On
Access Mode VLAN: 1 (default)
Trunking Native Mode VLAN: 1 (default)
. . .
```

```
SwitchX# show interfaces fa0/11 trunk
```

Port	Mode	Encapsulation	Status	Native vlan
Fa0/11	desirable	802.1q	trunking	1

Port	Vlans allowed on trunk
Fa0/11	1-4094

Port	Vlans allowed and active in management domain
Fa0/11	1-13

VLAN Creation Guidelines

- The maximum number of VLANs is switch-dependent.
- VLAN 1 is the factory default Ethernet VLAN.
- Cisco Discovery Protocol and VTP advertisements are sent on VLAN 1.
- The Cisco Catalyst switch IP address is in the management VLAN (VLAN 1 by default).
- If using VTP, the switch must be in VTP server or transparent mode to add or delete VLANs.

Adding a VLAN

```
SwitchX# configure terminal
SwitchX(config)# vlan 2
SwitchX(config-vlan)# name STUDENT
```

Verifying a VLAN

```
SwitchX# show vlan [brief | id vlan-id || name vlan-name]
```

```
SwitchX# show vlan id 2
```

VLAN	Name	Status	Ports
2	STUDENT	active	Fa0/2, Fa0/12

VLAN	Type	SAID	MTU	Parent	RingNo	BridgeNo	Stp	BrdgMode	Trans1	Trans2
2	enet	100002	1500	-	-	-	-	-	0	0

```
. . .  
SwitchX#
```


Assigning Switch Ports to a VLAN

```
SwitchX(config-if) #
```

```
switchport access [vlan vlan# | dynamic]
```

```
SwitchX# configure terminal
```

```
SwitchX(config)# interface range fastethernet 0/2 - 4
```

```
SwitchX(config-if)# switchport access vlan 2
```

```
SwitchX# show vlan
```

VLAN	Name	Status	Ports
1	default	active	Fa0/1
2	STUDENT	active	Fa0/2, Fa0/3, Fa0/4

Verifying VLAN Membership

```
SwitchX# show vlan brief
```

```
SwitchX# show vlan brief
```

VLAN	Name	Status	Ports
1	default	active	Fa0/1
2	STUDENT	active	Fa0/2, Fa0/3, Fa0/4
3	vlan3	active	
4	vlan4	active	
1002	fddi-default	act/unsup	
1003	token-ring-default	act/unsup	

VLAN	Name	Status	Ports
1004	fddinet-default	act/unsup	
1005	trnet-default	act/unsup	

Verifying VLAN Membership (Cont.)

SwitchX(config-if) #

```
show interfaces interface switchport
```

```
SwitchX# show interfaces fa0/2 switchport
```

```
Name: Fa0/2
```

```
Switchport: Enabled
```

```
Administrative Mode: dynamic auto
```

```
Operational Mode: static access
```

```
Administrative Trunking Encapsulation: dot1q
```

```
Operational Trunking Encapsulation: native
```

```
Negotiation of Trunking: On
```

```
Access Mode VLAN: 2 (STUDENT)
```

```
Trunking Native Mode VLAN: 1 (default)
```

```
--- output omitted ---
```

Executing Adds, Moves, and Changes for VLANs

- **When using VTP, the switch must be in VTP server or transparent mode to add, change, or delete VLANs.**
- **When you make VLAN changes from a switch in VTP server mode, the change is propagated to other switches in the VTP domain.**
- **Changing VLANs typically implies changing IP networks.**
- **After a port is reassigned to a new VLAN, that port is automatically removed from its previous VLAN.**
- **When you delete a VLAN, any ports in that VLAN that are not moved to an active VLAN will be unable to communicate with other stations.**

