

Track - Japan



AERODYNAMICS
TRANSMISSION
CAMBER/TOE
SUSPENSION
ROLLBARS
RIDEHEIGHT
BRAKES
FRONT TYRES
REAR TYRES

FRONT - 50 REAR - 38
ON - 100 OFF - 30
ALL LEFT
FRONT - 41 REAR - 41
FRONT - 4 REAR - 9
FRONT - 22 REAR - 42
PRES - 100 BIAS - 56-55
LEFT - 29.5 RIGHT 29.5
LEFT - 26.5 RIGHT 26.5

NOTES

RACE

Avoid overdriving the tyres through Sector 1.



AERODYNAMICS
TRANSMISSION
CAMBER/TOE
SUSPENSION
ROLLBARS
RIDEHEIGHT
BRAKES
FRONT TYRES
REAR TYRES

FRONT - 50 REAR - 40
ON - 100 OFF - 30
ALL LEFT
FRONT - 41 REAR - 41
FRONT - 4 REAR - 9
FRONT - 22 REAR - 42
PRES - 100 BIAS - 54
LEFT - 29.5 RIGHT 29.5
LEFT - 26.5 RIGHT 26.5

NOTES

INTERMEDIATES

Smooth and predictable inputs will maximise performance.




AERODYNAMICS
TRANSMISSION
CAMBER/TOE
SUSPENSION
ROLLBARS
RIDEHEIGHT
BRAKES
FRONT TYRES
REAR TYRES

FRONT - 50 REAR - 38
ON - 100 OFF - 30
ALL LEFT
FRONT - 41 REAR - 41
FRONT - 4 REAR - 9
FRONT - 22 REAR - 42
PRES - 100 BIAS - 55-54
LEFT - 29.5 RIGHT 29.5
LEFT - 26.5 RIGHT 26.5

NOTES

QUALIFYING

If you experience rear locking, increase brake bias by 1-2%.

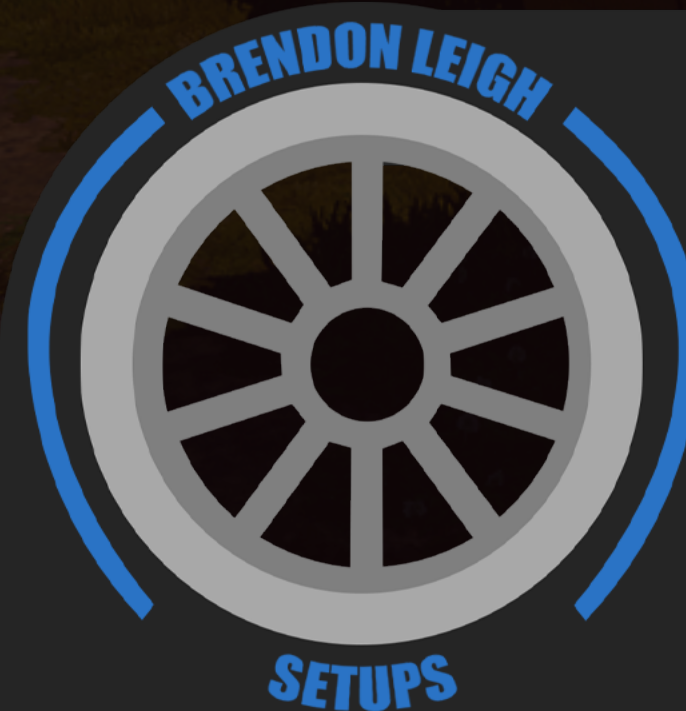

AERODYNAMICS
TRANSMISSION
CAMBER/TOE
SUSPENSION
ROLLBARS
RIDEHEIGHT
BRAKES
FRONT TYRES
REAR TYRES

FRONT - 50 REAR - 40
ON - 100 OFF - 30
ALL LEFT
FRONT - 41 REAR - 41
FRONT - 4 REAR - 9
FRONT - 22 REAR - 42
PRES - 100 BIAS - 54
LEFT - 29.5 RIGHT 29.5
LEFT - 26.5 RIGHT 26.5

NOTES

WETS

Use the off-line wet areas on straights to keep tyre temperatures under control.