


AS SEEN FROM REAR

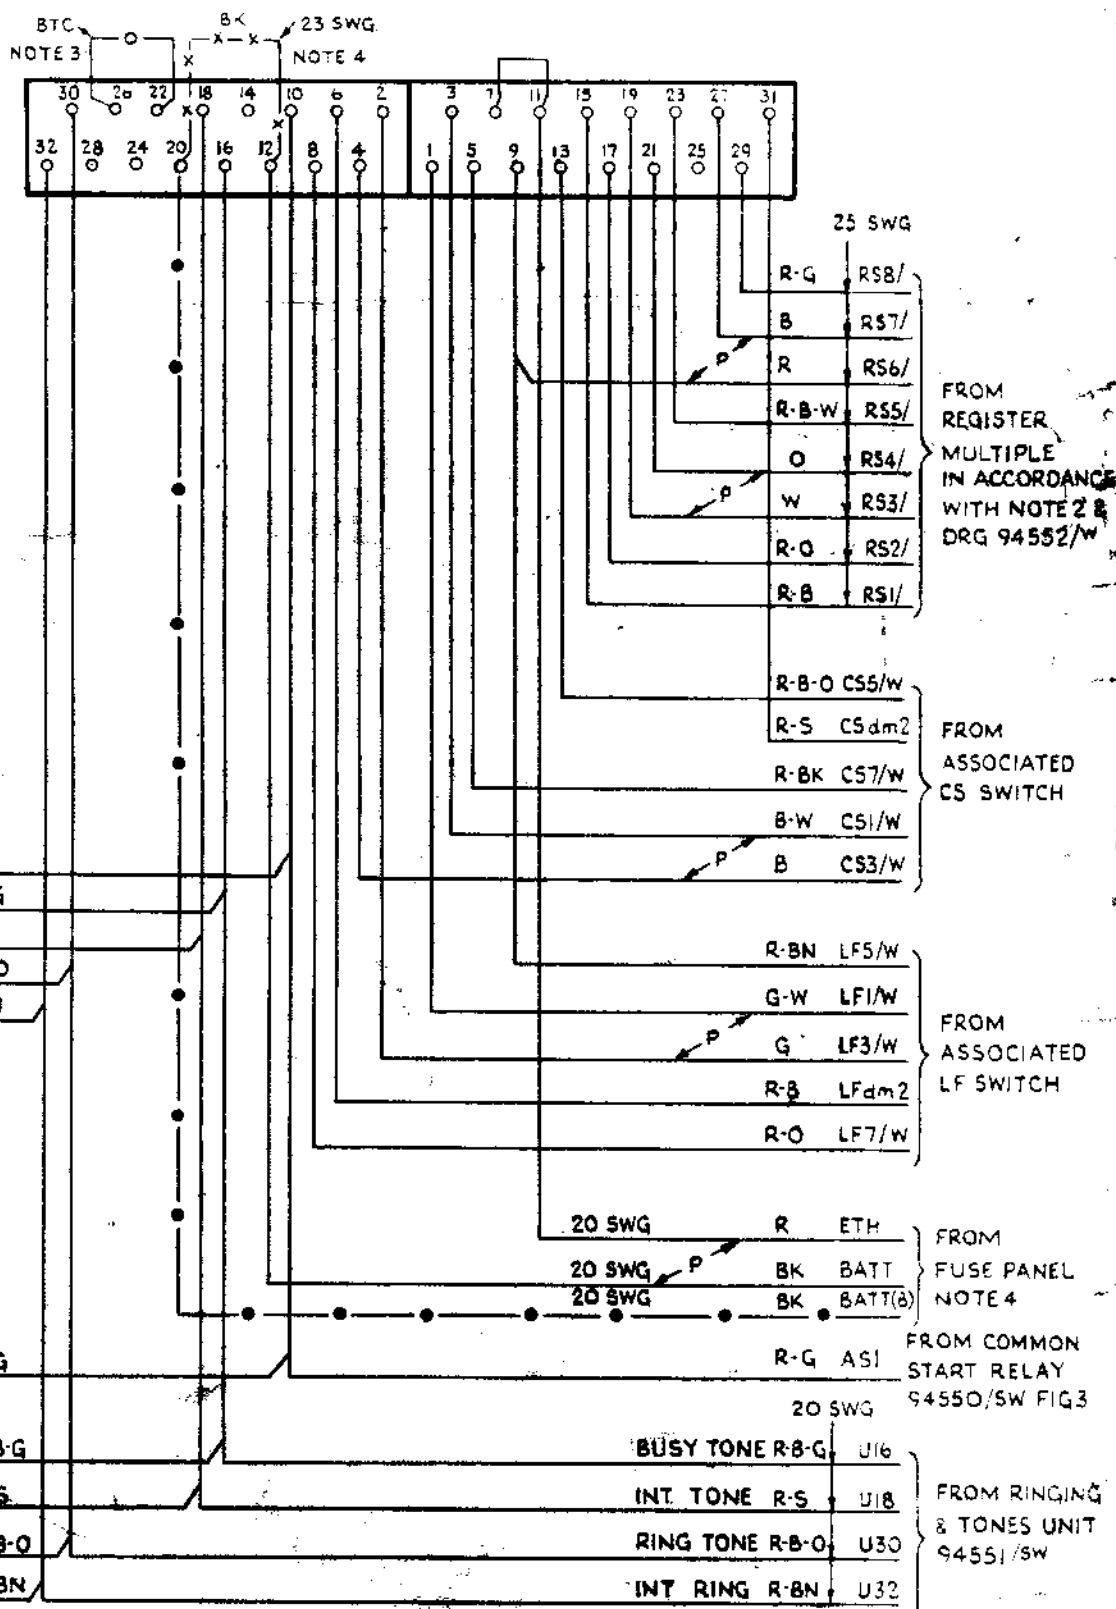

NOTES.

1. ALL WIRE TO BE 23 SWG UNLESS OTHERWISE SPECIFIED
2. WIRE IN ACCORDANCE WITH TABLE
3. ADD STRAP — ○ — WHEN AUTO PREFERENCE IS REQUIRED
4. (B) DENOTES SMOOTH SUPPLY. WHEN THERE IS NO UNSMOOTHED SUPPLY STRAP U12-20 & DELETE CONN. — ● —

CONNECTOR	WIRED TO	R CONTACTS
1		15
2		16
3		17
4		18
5		19
6		20
7		21

50 LINE P.A.X

CONNECTOR CIRCUIT

RETRACED

1250

1

12-1-61

AMENDMENT PARTICULARS

ISSUE

DATE

APPD

24 V.

E

BY LTD. BEESTON, NOTTINGHAM, ENGLAND

DEPT. ENG. DEPT.

APPROVED

R

DRAWN

CHECKED

WIRED

ENGINEER

94550/1^U

FIG. 2A