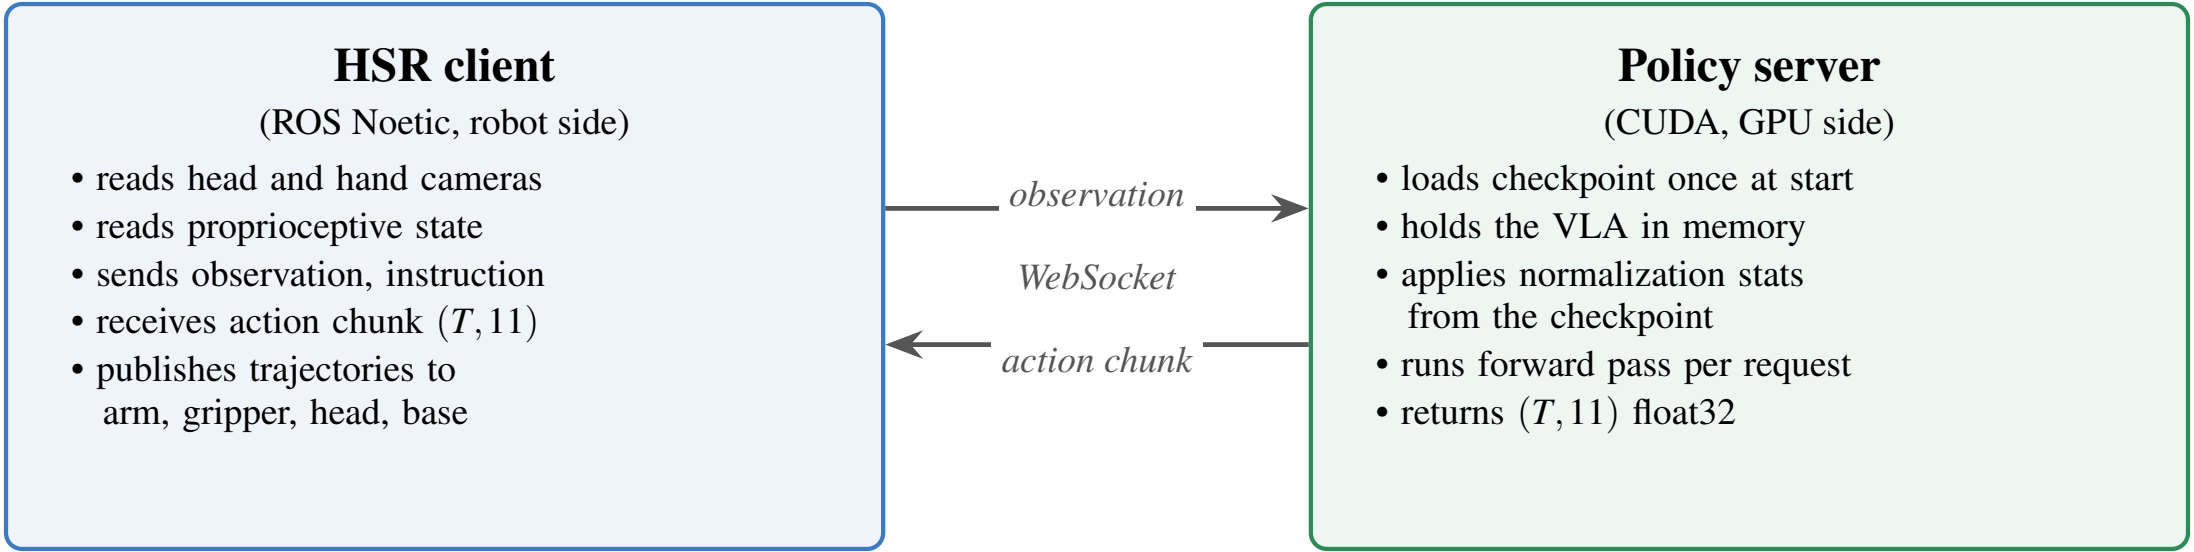

HSR client
(ROS Noetic, robot side)
• reads head and hand cameras
• reads proprioceptive state
• sends observation, instruction
• receives action chunk $(T, 11)$
• publishes trajectories to arm, gripper, head, base
observation
WebSocket
action chunk
Policy server
(CUDA, GPU side)
• loads checkpoint once at start
• holds the VLA in memory
• applies normalization stats from the checkpoint
• runs forward pass per request
• returns $(T, 11)$ float32