

1. Description

1.1. Project

| Project Name | LabMaketTest |
|-----------------|-------------------|
| Board Name | custom |
| Generated with: | STM32CubeMX 6.5.0 |
| Date | 04/26/2023 |


1.2. MCU

| MCU Series | STM32F1 |
|----------------|---------------|
| MCU Line | STM32F103 |
| MCU name | STM32F103CBTx |
| MCU Package | LQFP48 |
| MCU Pin number | 48 |

1.3. Core(s) information

| Core(s) | Arm Cortex-M3 |
|---------|---------------|

2. Pinout Configuration

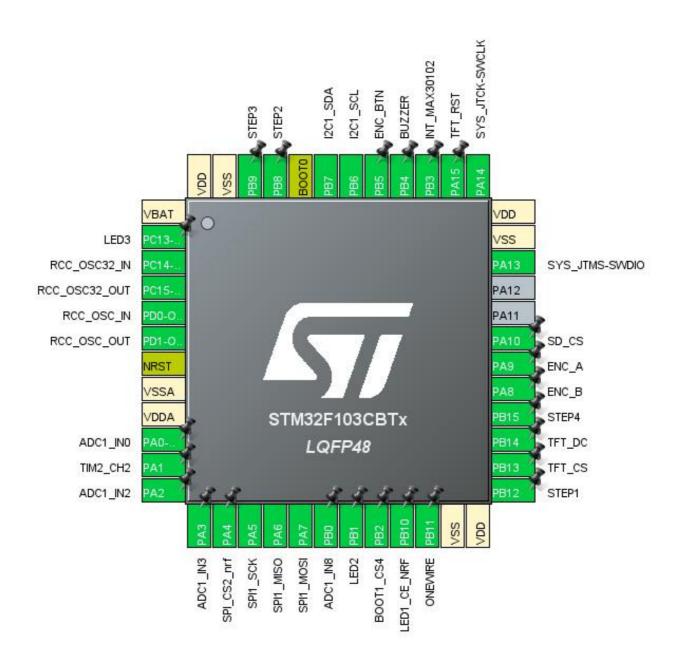


3. Pins Configuration

| Pin Number LQFP48 | Pin Name (function after reset) | Pin Type | Alternate Function(s) | Label |
|----------------------|---------------------------------------|----------|--------------------------|-------------|
| 1 | VBAT | Power | | |
| 2 | PC13-TAMPER-RTC * | I/O | GPIO_Output | LED3 |
| 3 | PC14-OSC32_IN | I/O | RCC_OSC32_IN | |
| 4 | PC15-OSC32_OUT | I/O | RCC_OSC32_OUT | |
| 5 | PD0-OSC_IN | I/O | RCC_OSC_IN | |
| 6 | PD1-OSC_OUT | I/O | RCC_OSC_OUT | |
| 7 | NRST | Reset | | |
| 8 | VSSA | Power | | |
| 9 | VDDA | Power | | |
| 10 | PA0-WKUP | I/O | ADC1_IN0 | |
| 11 | PA1 | I/O | TIM2_CH2 | |
| 12 | PA2 | I/O | ADC1_IN2 | |
| 13 | PA3 | I/O | ADC1_IN3 | |
| 14 | PA4 * | I/O | GPIO_Output | SPI_CS2_nrf |
| 15 | PA5 | I/O | SPI1_SCK | |
| 16 | PA6 | I/O | SPI1_MISO | |
| 17 | PA7 | I/O | SPI1_MOSI | |
| 18 | PB0 | I/O | ADC1_IN8 | |
| 19 | PB1 * | I/O | GPIO_Output | LED2 |
| 20 | PB2 * | I/O | GPIO_Output | BOOT1_CS4 |
| 21 | PB10 * | I/O | GPIO_Output | LED1_CE_NRF |
| 22 | PB11 * | I/O | GPIO_Input | ONEWIRE |
| 23 | VSS | Power | | |
| 24 | VDD | Power | | |
| 25 | PB12 * | I/O | GPIO_Output | STEP1 |
| 26 | PB13 * | I/O | GPIO_Output | TFT_CS |
| 27 | PB14 * | I/O | GPIO_Output | TFT_DC |
| 28 | PB15 * | I/O | GPIO_Output | STEP4 |
| 29 | PA8 | I/O | TIM1_CH1 | ENC_B |
| 30 | PA9 | I/O | TIM1_CH2 | ENC_A |
| 31 | PA10 * | I/O | GPIO_Output | SD_CS |
| 34 | PA13 | I/O | SYS_JTMS-SWDIO | |
| 35 | VSS | Power | | |
| 36 | VDD | Power | | |
| 37 | PA14 | I/O | SYS_JTCK-SWCLK | |
| 38 | PA15 * | I/O | GPIO_Output | TFT_RST |

| Pin Number LQFP48 | Pin Name (function after reset) | Pin Type | Alternate Function(s) | Label |
|----------------------|---------------------------------------|----------|--------------------------|--------------|
| 39 | PB3 * | I/O | GPIO_Input | INT_MAX30102 |
| 40 | PB4 * | I/O | GPIO_Output | BUZZER |
| 41 | PB5 * | I/O | GPIO_Input | ENC_BTN |
| 42 | PB6 | I/O | I2C1_SCL | |
| 43 | PB7 | I/O | I2C1_SDA | |
| 44 | воото | Boot | | |
| 45 | PB8 * | I/O | GPIO_Output | STEP2 |
| 46 | PB9 * | I/O | GPIO_Output | STEP3 |
| 47 | VSS | Power | | |
| 48 | VDD | Power | | |

^{*} The pin is affected with an I/O function

4. Clock Tree Configuration

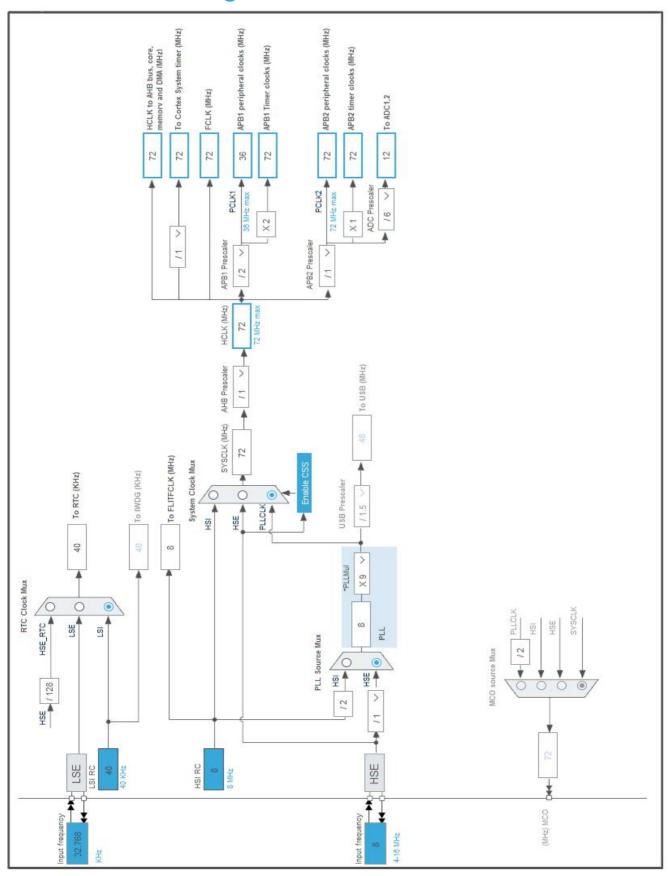

5. Software Project

5.1. Project Settings

| Name | Value |
|-----------------------------------|---|
| Project Name | LabMaketTest |
| Project Folder | C:\Users\Computer\STM32CubeIDE\workspace_1.9.0\LabMaketTest |
| Toolchain / IDE | STM32CubeIDE |
| Firmware Package Name and Version | STM32Cube FW_F1 V1.8.4 |
| Application Structure | Advanced |
| Generate Under Root | Yes |
| Do not generate the main() | No |
| Minimum Heap Size | 0x200 |
| Minimum Stack Size | 0x400 |

5.2. Code Generation Settings

| Name | Value |
|---|---------------------------------------|
| STM32Cube MCU packages and embedded software | Copy only the necessary library files |
| Generate peripheral initialization as a pair of '.c/.h' files | No |
| Backup previously generated files when re-generating | No |
| Keep User Code when re-generating | Yes |
| Delete previously generated files when not re-generated | Yes |
| Set all free pins as analog (to optimize the power | No |
| consumption) | |
| Enable Full Assert | No |

5.3. Advanced Settings - Generated Function Calls

| Rank | Function Name | Peripheral Instance Name |
|------|--------------------|--------------------------|
| 1 | MX_GPIO_Init | GPIO |
| 2 | MX_DMA_Init | DMA |
| 3 | SystemClock_Config | RCC |
| 4 | MX_SPI1_Init | SPI1 |
| 5 | MX_ADC1_Init | ADC1 |
| 6 | MX_RTC_Init | RTC |
| 7 | MX_FATFS_Init | FATFS |
| 8 | MX_TIM1_Init | TIM1 |
| 9 | MX_TIM2_Init | TIM2 |
| 10 | MX_I2C1_Init | I2C1 |

| LabMaketTest Project | t |
|----------------------|---|
| Configuration Repor | t |

6. Power Consumption Calculator report

6.1. Microcontroller Selection

| Series | STM32F1 |
|-----------|---------------|
| Line | STM32F103 |
| MCU | STM32F103CBTx |
| Datasheet | DS5319_Rev17 |

6.2. Parameter Selection

| Temperature | 25 |
|-------------|-----|
| Vdd | 3.3 |

6.3. Battery Selection

| Battery | Li-SOCL2(A3400) |
|-------------------|-----------------|
| Capacity | 3400.0 mAh |
| Self Discharge | 0.08 %/month |
| Nominal Voltage | 3.6 V |
| Max Cont Current | 100.0 mA |
| Max Pulse Current | 200.0 mA |
| Cells in series | 1 |
| Cells in parallel | 1 |


6.4. Sequence

| | T | |
|------------------------|-------------|--------------|
| Step | Step1 | Step2 |
| Mode | RUN | STOP |
| Vdd | 3.3 | 3.3 |
| Voltage Source | Battery | Battery |
| Range | No Scale | No Scale |
| Fetch Type | FLASH | n/a |
| CPU Frequency | 72 MHz | 0 Hz |
| Clock Configuration | HSE PLL | Regulator LP |
| Clock Source Frequency | 8 MHz | 0 Hz |
| Peripherals | | |
| Additional Cons. | 0 mA | 0 mA |
| Average Current | 27 mA | 14 μΑ |
| Duration | 0.1 ms | 0.9 ms |
| DMIPS | 90.0 | 0.0 |
| Ta Max | 100.1 | 105 |
| Category | In DS Table | In DS Table |

6.5. Results

| Sequence Time | 1 ms | Average Current | 2.71 mA |
|---------------|-------------------|-----------------|------------|
| Battery Life | 1 month, 21 days, | Average DMIPS | 61.0 DMIPS |
| | 17 hours | | |

6.6. Chart

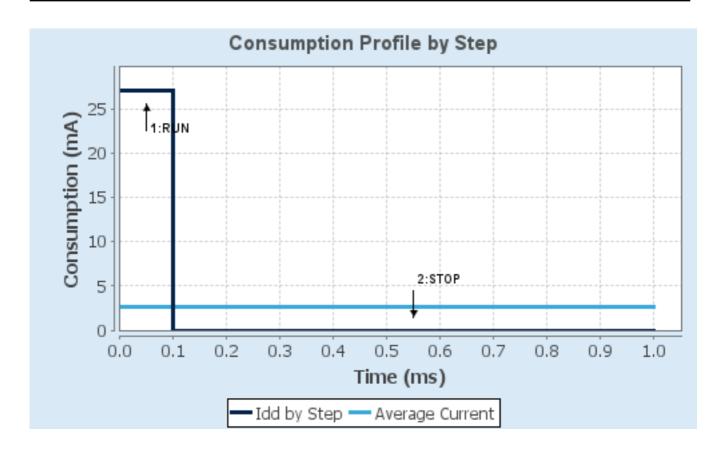

7. Peripherals and Middlewares Configuration

7.1. ADC1 mode: IN0 mode: IN2 mode: IN3 mode: IN8

7.1.1. Parameter Settings:

ADCs_Common_Settings:

Mode Independent mode

ADC_Settings:

Data Alignment Right alignment
Scan Conversion Mode Disabled

Continuous Conversion Mode Disabled

Discontinuous Conversion Mode Disabled

ADC_Regular_ConversionMode:

Enable Regular Conversions Enable
Number Of Conversion 1

External Trigger Conversion Source Regular Conversion launched by software

Rank 1

Channel Channel 0
Sampling Time 1.5 Cycles

ADC_Injected_ConversionMode:

Enable Injected Conversions Disable

WatchDog:

Enable Analog WatchDog Mode false

7.2. I2C1 I2C: I2C

7.2.1. Parameter Settings:

Master Features:

I2C Speed Mode Fast Mode *

I2C Clock Speed (Hz) 400000

Fast Mode Duty Cycle Duty cycle Tlow/Thigh = 2

Slave Features:

Clock No Stretch Mode Disabled

Primary Address Length selection 7-bit

Dual Address Acknowledged Disabled

Primary slave address 0

General Call address detection Disabled

7.3. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator Low Speed Clock (LSE): Crystal/Ceramic Resonator

7.3.1. Parameter Settings:

System Parameters:

VDD voltage (V) 3.3
Prefetch Buffer Enabled

Flash Latency(WS) 2 WS (3 CPU cycle)

RCC Parameters:

HSI Calibration Value 16
HSE Startup Timout Value (ms) 100
LSE Startup Timout Value (ms) 5000

7.4. RTC

mode: Activate Clock Source mode: Activate Calendar RTC OUT: No RTC Output 7.4.1. Parameter Settings:

Calendar Time:

Data Format Binary data format *

 Hours
 0

 Minutes
 0

 Seconds
 0

General:

Auto Predivider Calculation Enabled

Asynchronous Predivider value Automatic Predivider Calculation Enabled

Output No output on the TAMPER pin

Calendar Date:

Week Day Monday
Month January

Date 1

Year **21** *

7.5. SPI1

Mode: Full-Duplex Master

7.5.1. Parameter Settings:

Basic Parameters:

Frame Format Motorola

Data Size 8 Bits

First Bit MSB First

Clock Parameters:

Prescaler (for Baud Rate) 4 *

Baud Rate 18.0 MBits/s *

Clock Polarity (CPOL) Low
Clock Phase (CPHA) 1 Edge

Advanced Parameters:

CRC Calculation Disabled
NSS Signal Type Software

7.6. SYS

Debug: Serial Wire

Timebase Source: SysTick

7.7. TIM1

Combined Channels: Encoder Mode

7.7.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value) 0
Counter Mode Up
Counter Period (AutoReload Register - 16 bits value) 16 *

Internal Clock Division (CKD) No Division

Repetition Counter (RCR - 8 bits value) 0
auto-reload preload Disable

Trigger Output (TRGO) Parameters:

| Master/Slave Mode (MSM bit) | Disable (Trigger input effect not delayed) |
|-----------------------------|--|
| Trigger Event Selection | Reset (UG bit from TIMx_EGR) |
| Encoder: | |
| Encoder Mode | Encoder Mode TI1 |
| Parameters for Channel 1 | |
| Polarity | Rising Edge |
| IC Selection | Direct |
| Prescaler Division Ratio | No division |
| Input Filter | 15 * |
| Parameters for Channel 2 | |
| Polarity | Rising Edge |
| IC Selection | Direct |
| Prescaler Division Ratio | No division |
| Input Filter | 15 * |
| | |
| | |

7.8. TIM2

Channel2: PWM Generation CH2

7.8.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value) 1000 *

Counter Mode Up

Counter Period (AutoReload Register - 16 bits value) 100 *

Internal Clock Division (CKD) No Division auto-reload preload Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)

Disable (Trigger input effect not delayed)

Trigger Event Selection

Reset (UG bit from TIMx_EGR)

PWM Generation Channel 2:

Mode PWM mode 1

Pulse (16 bits value) 0

Output compare preload Enable
Fast Mode Disable
CH Polarity High

7.9. FATFS

mode: User-defined

7.9.1. Set Defines:

Version:

FATFS version R0.11

Function Parameters:

FS_READONLY (Read-only mode) Disabled
FS_MINIMIZE (Minimization level) Disabled

USE_STRFUNC (String functions) Enabled with LF -> CRLF conversion

USE_FIND (Find functions)

USE_MKFS (Make filesystem function)

USE_FASTSEEK (Fast seek function)

USE_LABEL (Volume label functions)

USE_FORWARD (Forward function)

Disabled

Locale and Namespace Parameters:

CODE_PAGE (Code page on target) Multilingual Latin 1 (OEM)

USE_LFN (Use Long Filename) Disabled MAX_LFN (Max Long Filename) 255

LFN_UNICODE (Enable Unicode)

STRF_ENCODE (Character encoding)

FS_RPATH (Relative Path)

Disabled

Physical Drive Parameters:

VOLUMES (Logical drives)

MAX_SS (Maximum Sector Size) 4096 *

MIN_SS (Minimum Sector Size) 512

MULTI_PARTITION (Volume partitions feature) Disabled

USE_TRIM (Erase feature) Disabled

FS_NOFSINFO (Force full FAT scan) 0

System Parameters:

FS_TINY (Tiny mode) Disabled

FS_NORTC (Timestamp feature) Dynamic timestamp

WORD_ACCESS (Platform dependent access option) Byte access FS_REENTRANT (Re-Entrancy) Disabled FS_TIMEOUT (Timeout ticks) 1000 FS_LOCK (Number of files opened simultaneously) 2

* User modified value

8. System Configuration

8.1. GPIO configuration

| IP | Pin | Signal | GPIO mode | GPIO pull/up pull down | Max Speed | User Label |
|------|-------------------------|--------------------|-------------------------------|-----------------------------|--------------|-------------|
| ADC1 | PA0-WKUP | ADC1_IN0 | Analog mode | n/a | n/a | |
| ADOT | PA2 | ADC1_IN0 | Analog mode | n/a | n/a | |
| | PA3 | ADC1_IN3 | Analog mode | n/a | n/a | |
| | PB0 | ADC1_IN8 | Analog mode | n/a | n/a | |
| I2C1 | PB6 | I2C1_SCL | Alternate Function Open Drain | n/a | High * | |
| | PB7 | I2C1_SDA | Alternate Function Open Drain | n/a | High * | |
| RCC | PC14- OSC32_IN | RCC_OSC32_IN | n/a | n/a | n/a | |
| | PC15- OSC32_OU T | RCC_OSC32_O UT | n/a | n/a | n/a | |
| | PD0- OSC_IN | RCC_OSC_IN | n/a | n/a | n/a | |
| | PD1- OSC_OUT | RCC_OSC_OUT | n/a | n/a | n/a | |
| SPI1 | PA5 | SPI1_SCK | Alternate Function Push Pull | n/a | High * | |
| | PA6 | SPI1_MISO | Input mode | No pull-up and no pull-down | n/a | |
| | PA7 | SPI1_MOSI | Alternate Function Push Pull | n/a | High * | |
| SYS | PA13 | SYS_JTMS- SWDIO | n/a | n/a | n/a | |
| | PA14 | SYS_JTCK- SWCLK | n/a | n/a | n/a | |
| TIM1 | PA8 | TIM1_CH1 | Input mode | No pull-up and no pull-down | n/a | ENC_B |
| | PA9 | TIM1_CH2 | Input mode | No pull-up and no pull-down | n/a | ENC_A |
| TIM2 | PA1 | TIM2_CH2 | Alternate Function Push Pull | n/a | Low | |
| GPIO | PC13- TAMPER- RTC | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | LED3 |
| | PA4 | GPIO_Output | Output Push Pull | Pull-up * | High * | SPI_CS2_nrf |
| | PB1 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | LED2 |
| | PB2 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | High * | BOOT1_CS4 |
| | PB10 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | High * | LED1_CE_NRF |
| | PB11 | GPIO_Input | Input mode | No pull-up and no pull-down | n/a | ONEWIRE |
| | PB12 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | STEP1 |
| | PB13 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | High * | TFT_CS |

| IP | Pin | Signal | GPIO mode | GPIO pull/up pull down | Max Speed | User Label |
|----|------|-------------|------------------|-----------------------------|--------------|--------------|
| | PB14 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | High * | TFT_DC |
| | PB15 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | STEP4 |
| | PA10 | GPIO_Output | Output Push Pull | Pull-up * | High * | SD_CS |
| | PA15 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | TFT_RST |
| | PB3 | GPIO_Input | Input mode | Pull-up * | n/a | INT_MAX30102 |
| | PB4 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | BUZZER |
| | PB5 | GPIO_Input | Input mode | Pull-up * | n/a | ENC_BTN |
| | PB8 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | STEP2 |
| | PB9 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | STEP3 |

8.2. DMA configuration

| DMA request | Stream | Direction | Priority |
|-------------|---------------|----------------------|----------|
| SPI1_TX | DMA1_Channel3 | Memory To Peripheral | Low |

SPI1_TX: DMA1_Channel3 DMA request Settings:

Mode: Normal
Peripheral Increment: Disable
Memory Increment: Enable *

Peripheral Data Width: Byte Memory Data Width: Byte

8.3. NVIC configuration

8.3.1. NVIC

| Interrupt Table | Enable | Preenmption Priority | SubPriority |
|---|--------|----------------------|-------------|
| Non maskable interrupt | true | 0 | 0 |
| Hard fault interrupt | true | 0 | 0 |
| Memory management fault | true | 0 | 0 |
| Prefetch fault, memory access fault | true | 0 | 0 |
| Undefined instruction or illegal state | true | 0 | 0 |
| System service call via SWI instruction | true | 0 | 0 |
| Debug monitor | true | 0 | 0 |
| Pendable request for system service | true | 0 | 0 |
| System tick timer | true | 0 | 0 |
| DMA1 channel3 global interrupt | true | 0 | 0 |
| PVD interrupt through EXTI line 16 | | unused | |
| RTC global interrupt | unused | | |
| Flash global interrupt | unused | | |
| RCC global interrupt | unused | | |
| ADC1 and ADC2 global interrupts | unused | | |
| TIM1 break interrupt | | unused | |
| TIM1 update interrupt | unused | | |
| TIM1 trigger and commutation interrupts | unused | | |
| TIM1 capture compare interrupt | unused | | |
| TIM2 global interrupt | unused | | |
| I2C1 event interrupt | unused | | |
| I2C1 error interrupt | unused | | |
| SPI1 global interrupt | | unused | |

8.3.2. NVIC Code generation

| Enabled interrupt Table | Select for init sequence ordering | Generate IRQ handler | Call HAL handler |
|---|-----------------------------------|-------------------------|------------------|
| Non maskable interrupt | false | true | false |
| Hard fault interrupt | false | true | false |
| Memory management fault | false | true | false |
| Prefetch fault, memory access fault | false | true | false |
| Undefined instruction or illegal state | false | true | false |
| System service call via SWI instruction | false | true | false |
| Debug monitor | false | true | false |
| Pendable request for system service | false | true | false |
| System tick timer | false | true | true |
| DMA1 channel3 global interrupt | false | true | true |


| LabMaketTest | Project |
|---------------|---------|
| Configuration | Report |

* User modified value

9. System Views

- 9.1. Category view
- 9.1.1. Current



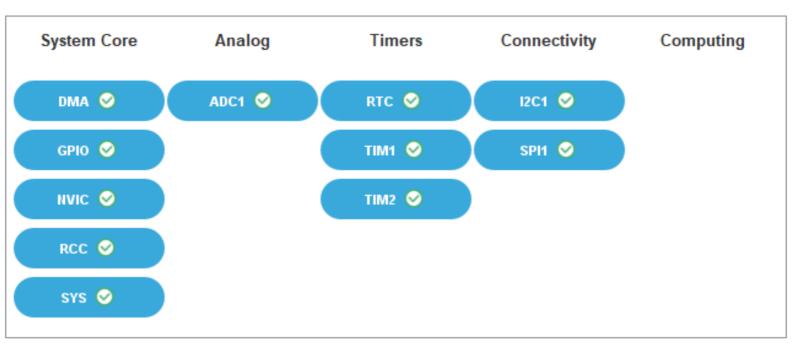

10. Docs & Resources

Type Link

Presentations https://www.st.com/resource/en/product_presentation/stm32-

stm8_embedded_software_solutions.pdf

Presentations https://www.st.com/resource/en/product_presentation/stm32_eval-

tools_portfolio.pdf

Presentations https://www.st.com/resource/en/product_presentation/stm32_stm8_functi

onal-safety-packages.pdf

Presentations https://www.st.com/resource/en/product_presentation/stm32-

stm8_software_development_tools.pdf

Training Material https://www.st.com/resource/en/sales_guide/sg_sc2155.pdf

Brochures https://www.st.com/resource/en/brochure/breveco0518.pdf

Flyers https://www.st.com/resource/en/flyer/flnucleolrwan.pdf

Flyers https://www.st.com/resource/en/flyer/flstm32nucleo.pdf

Flyers https://www.st.com/resource/en/flyer/flstmcsuite.pdf

Flyers https://www.st.com/resource/en/flyer/fldpstpfc11120.pdf

Product https://www.st.com/resource/en/certification_document/1239988349.pdf

Certifications

Product https://www.st.com/resource/en/certification_document/stm32_authenticat

Certifications ion_can.pdf

Application Notes https://www.st.com/resource/en/application note/an1181-electrostatic-

discharge-sensitivity-measurement-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an1709-emc-design-

guide-for-stm8-stm32-and-legacy-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2548-using-the-

stm32f0f1f3gxlx-series-dma-controller-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2586-getting-started-

with-stm32f10xxx-hardware-development-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2606-stm32-

microcontroller-system-memory-boot-mode-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2639-soldering-

- recommendations-and-package-information-for-leadfree-ecopack-mcusand-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an2834-how-to-get-the-best-adc-accuracy-in-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an2945-stm8s-and-stm32-mcus-a-consistent-832bit-product-line-for-painless-migration-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3070-managing-the-driver-enable-signal-for-rs485-and-iolink-communications-with-the-stm32s-usart-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3095-stevalisv002v1-stevalisv002v2-3-kw-gridconnected-pv-system-based-on-the-stm32f103xx-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3108-stlm75-firmware-library-for-the-stm32f10x-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3126-audio-and-waveform-generation-using-the-dac-in-stm32-products-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3128-stm32-embedded-graphic-objectstouchscreen-library-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3154-can-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3155-usart-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3156-usb-dfu-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3364-migration-and-compatibility-guidelines-for-stm32-microcontroller-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3422-migration-of-microcontroller-applications-from-stm32f1-to-stm32l1-series-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3427-migrating-a-

- microcontroller-application-from-stm32f1-to-stm32f2-series-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3429-stm32-proprietary-code-protection-overview-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3970-plm-smartplug-v2-getting-started-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4013-stm32-crossseries-timer-overview-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4068-st7580-power-line-communication-systemonchip-design-guide-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4070-250-w-grid-connected-microinverter-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4076-two-or-three-shunt-resistor-based-current-sensing-circuit-design-in-3phase-inverters-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4088-migrating-between-stm32f1-and-stm32f0-series-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4228-migrating-from-stm32f1-series-to-stm32f3-series-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4229-how-to-implement-a-vocoder-solution-using-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4277-using-stm32-device-pwm-shutdown-features-for-motor-control-and-digital-power-conversion-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4566-extending-the-dac-performance-of-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4649-migrating-from-stm32f1-series-to-stm32l4-series--stm32l4-series-microntrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4655-virtually-increasing-the-number-of-serial-communication-peripherals-in-stm32-

- applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4724-stm32cube-firmware-examples-for-stm32f1-series-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4750-handling-of-soft-errors-in-stm32-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4776-generalpurpose-timer-cookbook-for-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4803-highspeed-si-simulations-using-ibis-and-boardlevel-simulations-using-hyperlynx-si-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4838-managing-memory-protection-unit-in-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4879-usb-hardware-and-pcb-guidelines-using-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4904-migration-of-microcontroller-applications-from-stm32f1-series-to-stm32f4-access-lines-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4908-stm32-usart-automatic-baud-rate-detection-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4989-stm32-microcontroller-debug-toolbox-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5027-interfacing-pdm-digital-microphones-using-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5036-thermal-management-guidelines-for-stm32-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5156-introduction-to-stm32-microcontrollers-security-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5225-usb-typec-power-delivery-using-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5543-enhanced-methods-to-handle-spi-communication-on-stm32-devices-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4899-stm32-

microcontroller-gpio-configuration-for-hardware-settings-and-lowpower-consumption-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an1202_freertos_guide-

for related Tools freertos-guide-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an1602_semihosting_in for related Tools __truestudio-how-to-do-semihosting-in-truestudio-stmicroelectronics.pdf & Software

Application Notes https://www.st.com/resource/en/application_note/an1801_stm32cubeprog for related Tools rammer_in_truestudio-installing-stm32cubeprogrammer-in-truestudio-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/atollic_editing_keyboard for related Tools _shortcuts-atollic-editing-keyboard-shortcuts-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/iar_to_atollic_truestudio for related Tools _migration_guide-truestudio-for-arm-migration-guide-iar-embedded-

& Software workbench-to-truestudio-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/stm32cubemx_installatio

for related Tools n in truestudio-stm32cubemx-installation-in-truestudio-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2557-stm32f10x-for related Tools inapplication-programming-using-the-usart-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an2592-achieving-32bit-for related Tools timer-resolution-with-software-expansion-for-stm32cube-and-standard-

& Software peripheral-library-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2594-eeprom-for related Tools emulation-in-stm32f10x-microcontrollers-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an2598-smartcard-

for related Tools interface-with-stm32f10x-and-stm32l1xx-microcontrollers-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2629-stm32f101xx-for related Tools stm32f102xx-and-stm32f103xx-lowpower-modes-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an2656-stm32f10xxx-

for related Tools Icd-glass-driver-firmware-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an2668-improving-for related Tools stm32f1-series-stm32f3-series-and-stm32lx-series-adc-resolution-by-

& Software oversampling-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2739-how-to-use-the-

for related Tools highdensity-stm32f103xx-microcontroller-to-play-audio-files-with-an-

& Software external-is-audio-codec-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2784-using-the-for related Tools highdensity-stm32f10xxx-fsmc-peripheral-to-drive-external-memories-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2790-tft-lcd-

for related Tools interfacing-with-the-highdensity-stm32f10xxx-fsmc-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an2820-driving-bipolar-for related Tools stepper-motors-using-a-mediumdensity-stm32f103xx-microcontroller-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2821-clockcalendar-

for related Tools implementation-on-the-stm32f10xxx-microcontroller-rtc-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application note/an2824-stm32f10xxx-ic-

for related Tools optimized-examples-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an2841-led-dimming-

for related Tools implemented-on-stm32-microcontroller-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an2868-stm32f10xxx-

for related Tools internal-rc-oscillator-hsi-calibration-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an2931-implementing-

for related Tools the-adpcm-algorithm-in-highdensity-stm32f103xx-microcontrollers-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2953-how-to-migrate-for related Tools from-the-stm32f10xxx-firmware-library-v203-to-the-stm32f10xxx-standard-

& Software peripheral-library-v300-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3012-getting-started-for related Tools with-uclinux-for-stm32f10x-highdensity-devices-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an3078-stm32-for related Tools inapplication-programming-over-the-ic-bus-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an3109-communication-

for related Tools peripheral-fifo-emulation-with-dma-and-dma-timeout-in-stm32f10x-

& Software microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3116-stm32s-adc-

for related Tools modes-and-their-applications-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an3174-implementing-for related Tools receivers-for-infrared-remote-control-protocols-using-stm32f10xxx-

& Software microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3240-ultrasound-hv-

for related Tools pulser-demonstration-board-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an3241-qvga-tftlcd-for related Tools direct-drive-using-the-stm32f10xx-fsmc-peripheral-stmicroelectronics.pdf & Software

Application Notes https://www.st.com/resource/en/application_note/an3307-guidelines-for-for related Tools obtaining-iec-60335-class-b-certification-for-any-stm32-application-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3970-plm-smartplug-

for related Tools v2-getting-started-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an3991-how-to-drive-

for related Tools multiple-stepper-motors-with-the-l6470-motor-driver-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4075-stevalifp016v2-

for related Tools iolink-communication-master-transceiver-demonstration-board-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4187-using-the-crc-

for related Tools peripheral-in-the-stm32-family-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4323-getting-started-

for related Tools with-stemwin-library-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4435-guidelines-for-for related Tools obtaining-ulcsaiec-607301603351-class-b-certification-in-any-stm32-

& Software application-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4453-implementing-for related Tools the-adpcm-algorithm-in-stm32l1xx-microcontrollers-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4499-stm32--

for related Tools nrf51822-bluetooth-low-energy-system-solution-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4502-stm32-for related Tools smbuspmbus-embedded-software-expansion-for-stm32cube-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4578-16channels-led-

for related Tools driver-with-independent-pwm-dimming-control-based-on-led7708-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4657-stm32-

for related Tools inapplication-programming-iap-using-the-usart-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4724-stm32cube-

for related Tools firmware-examples-for-stm32f1-series-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4841-digital-signal-for related Tools processing-for-stm32-microcontrollers-using-cmsis-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5054-secure-for related Tools programming-using-stm32cubeprogrammer-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5360-getting-started-

for related Tools with-projects-based-on-the-stm32mp1-series-in-stm32cubeide-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5361-getting-started-

for related Tools with-projects-based-on-dualcore-stm32h7-microcontrollers-in-

& Software stm32cubeide-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5394-getting-started-

for related Tools with-projects-based-on-the-stm32l5-series-in-stm32cubeide-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5418-how-to-build-a-for related Tools simple-usbpd-sink-application-with-stm32cubemx-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5426-migrating-

for related Tools graphics-middleware-projects-from-stm32cubemx-540-to-stm32cubemx-

& Software 550-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5564-getting-started-

for related Tools with-projects-based-on-dualcore-stm32wl-microcontrollers-in-

& Software stm32cubeide-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5698-adapting-the-for related Tools xcubestl-functional-safety-package-for-stm32-iec-61508-compliant-to-

& Software other-safety-standards-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application note/an5731-stm32cubemx-

for related Tools and-stm32cubeide-threadsafe-solution-stmicroelectronics.pdf

& Software

Device Option https://www.st.com/resource/en/device_option_list/opl_stm32f103_128k.zi

Lists

Errata Sheets https://www.st.com/resource/en/errata_sheet/es096-stm32f101x8b-

stm32f102x8b-and-stm32f103x8b-mediumdensity-device-limitations-

stmicroelectronics.pdf

Datasheet https://www.st.com/resource/en/datasheet/cd00161566.pdf

Programming https://www.st.com/resource/en/programming_manual/pm0056-

Manuals stm32f10xxx20xxx21xxxl1xxxx-cortexm3-programming-manual-

stmicroelectronics.pdf

Programming https://www.st.com/resource/en/programming_manual/pm0075-Manuals stm32f10xxx-flash-memory-microcontrollers-stmicroelectronics.pdf

Reference https://www.st.com/resource/en/reference_manual/rm0008-stm32f101xx-Manuals stm32f102xx-stm32f103xx-stm32f105xx-and-stm32f107xx-advanced-

armbased-32bit-mcus-stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn0516-overview-of-the-& Articles stm32f0xf100xxf103xx-and-stm32f2xxf30xf4xx-mcus-pmsm-singledual-

foc-sdk-v40-stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1163-description-of-

& Articles wlcsp-for-microcontrollers-and-recommendations-for-its-use-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1204-tape-and-reel-

& Articles shipping-media-for-stm32-microcontrollers-in-bga-packages-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1205-tape-and-reel-

& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-fpn-packages-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1206-tape-and-reel-

& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-qfp-packages-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1207-tape-and-reel-

& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-so-packages-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1208-tape-and-reel-

& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-tssop-and-ssop-

packages-stmicroelectronics.pdf

User Manuals https://www.st.com/resource/en/user_manual/um1561-stevalisv003v1-

firmware-user-manual-stmicroelectronics.pdf

User Manuals https://www.st.com/resource/en/user_manual/um1573-st7540-power-line-

modem-firmware-stack-stmicroelectronics.pdf