


EX-8 GAS SENSOR MQ-2 IN PROTEUS USING ARDUINO

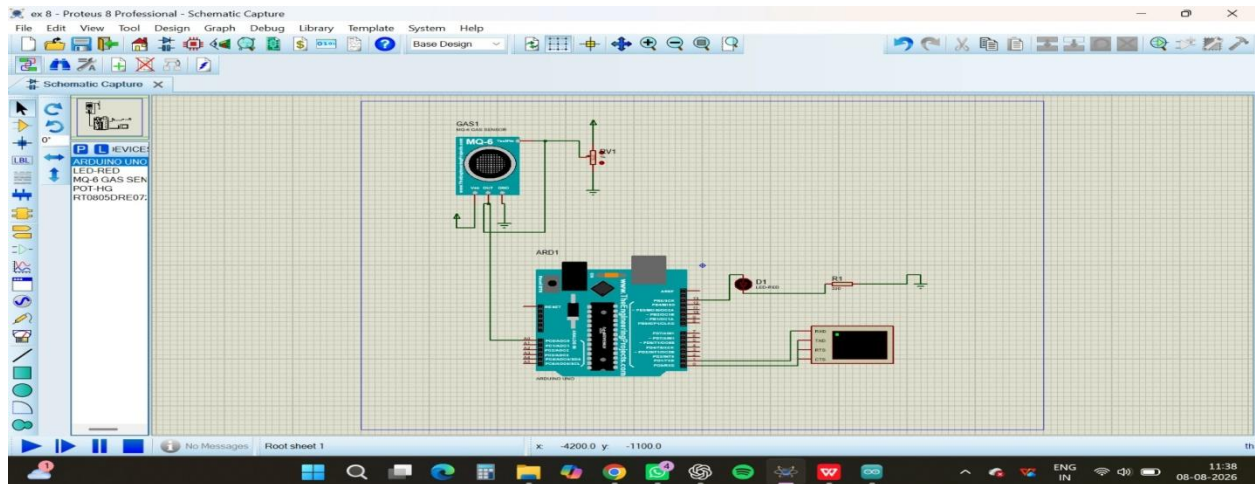

```
sketch_aug8c.ino
21 // Print the data to the Serial Monitor / Virtual Terminal
22 Serial.print("MQ2 Sensor Value: ");
23 Serial.println(sensorValue);
24
25 // Check if gas concentration exceeds the safe threshold
26 if (sensorValue > threshold) {
27   digitalWrite(alertPin, HIGH); // Turn ON buzzer/LED
28   Serial.println("--- ALERT: Gas Detected! ---");
29 } else {
30   digitalWrite(alertPin, LOW); // Turn OFF buzzer/LED
31 }
32
33 // 1-second delay before the next reading
34 delay(1000);
35
36 }
```

Output

Sketch uses 2334 bytes (7%) of program storage space. Maximum is 32256 bytes.
Global variables use 236 bytes (11%) of dynamic memory, leaving 1812 bytes for local variables. Maximum is 2048 bytes.

